


CONCRETE PLAN GENERAL NOTES


1. WHERE WALLS ALIGN TO GRID, LOCATE FACE OF STUD OR FACE OF CONCRETE AT GRID, U.N.O.
2. FINISH FLOOR ELEVATION TYPICAL, ACROSS LEVEL, U.N.O.
3. REFER TO A0.10 AND A0.11 FOR ASSEMBLIES
4. ALL DIMENSIONS ARE TO FACE OF CONCRETE AND CENTERLINE OF CONCRETE COLUMN, U.N.O.
5. T.O. CURBS 4" A.F.F. MAXIMUM 6" A.F.F. WHERE SLAB IS SLOPED, U.N.O.
6. MIN. 1% SLOPE TO DRAINS
7. TOP OF CONCRETE SLAB ELEVATIONS PROVIDED FOR REFERENCE, CONTRACTOR SHALL COORDINATE WITH FINISH FLOOR ELEVATIONS PROVIDED ON ARCHITECTURAL PLANS AND ADJUST CONCRETE AS NECESSARY
8. CEILING HEIGHTS MEASURED FROM TOP OF CONCRETE - SEE SECTIONS
9. COORDINATE WITH ALL ENLARGED PLANS FOR ADDITIONAL INFORMATION AND DETAILS
10. COORDINATE WITH STRUCTURAL FRAMING PLANS AND SHEAR WALL PLANS FOR SIZE, DETAILS, AND REINFORCING FOR COLUMNS, BEAMS, SHEAR WALLS, ETC.
11. COORDINATE WITH ELECTRICAL DRAWINGS FOR ALL LIGHTING, POWER, AND DATA REQUIREMENTS
12. COORDINATE WITH MECHANICAL DRAWINGS FOR ALL PLUMBING AND MECHANICAL PENETRATIONS

CONCRETE PLAN LEGEND

- SLAB PENETRATION
SLAB STEP SYMBOL
SLAB SLOPE SYMBOL
CONCRETE SLAB - STRUCTURAL
AREA OF RECESSED SLAB - STRUCTURAL / ARCHITECTURAL
AREA OF OVERBUILT SLAB - ARCHITECTURAL

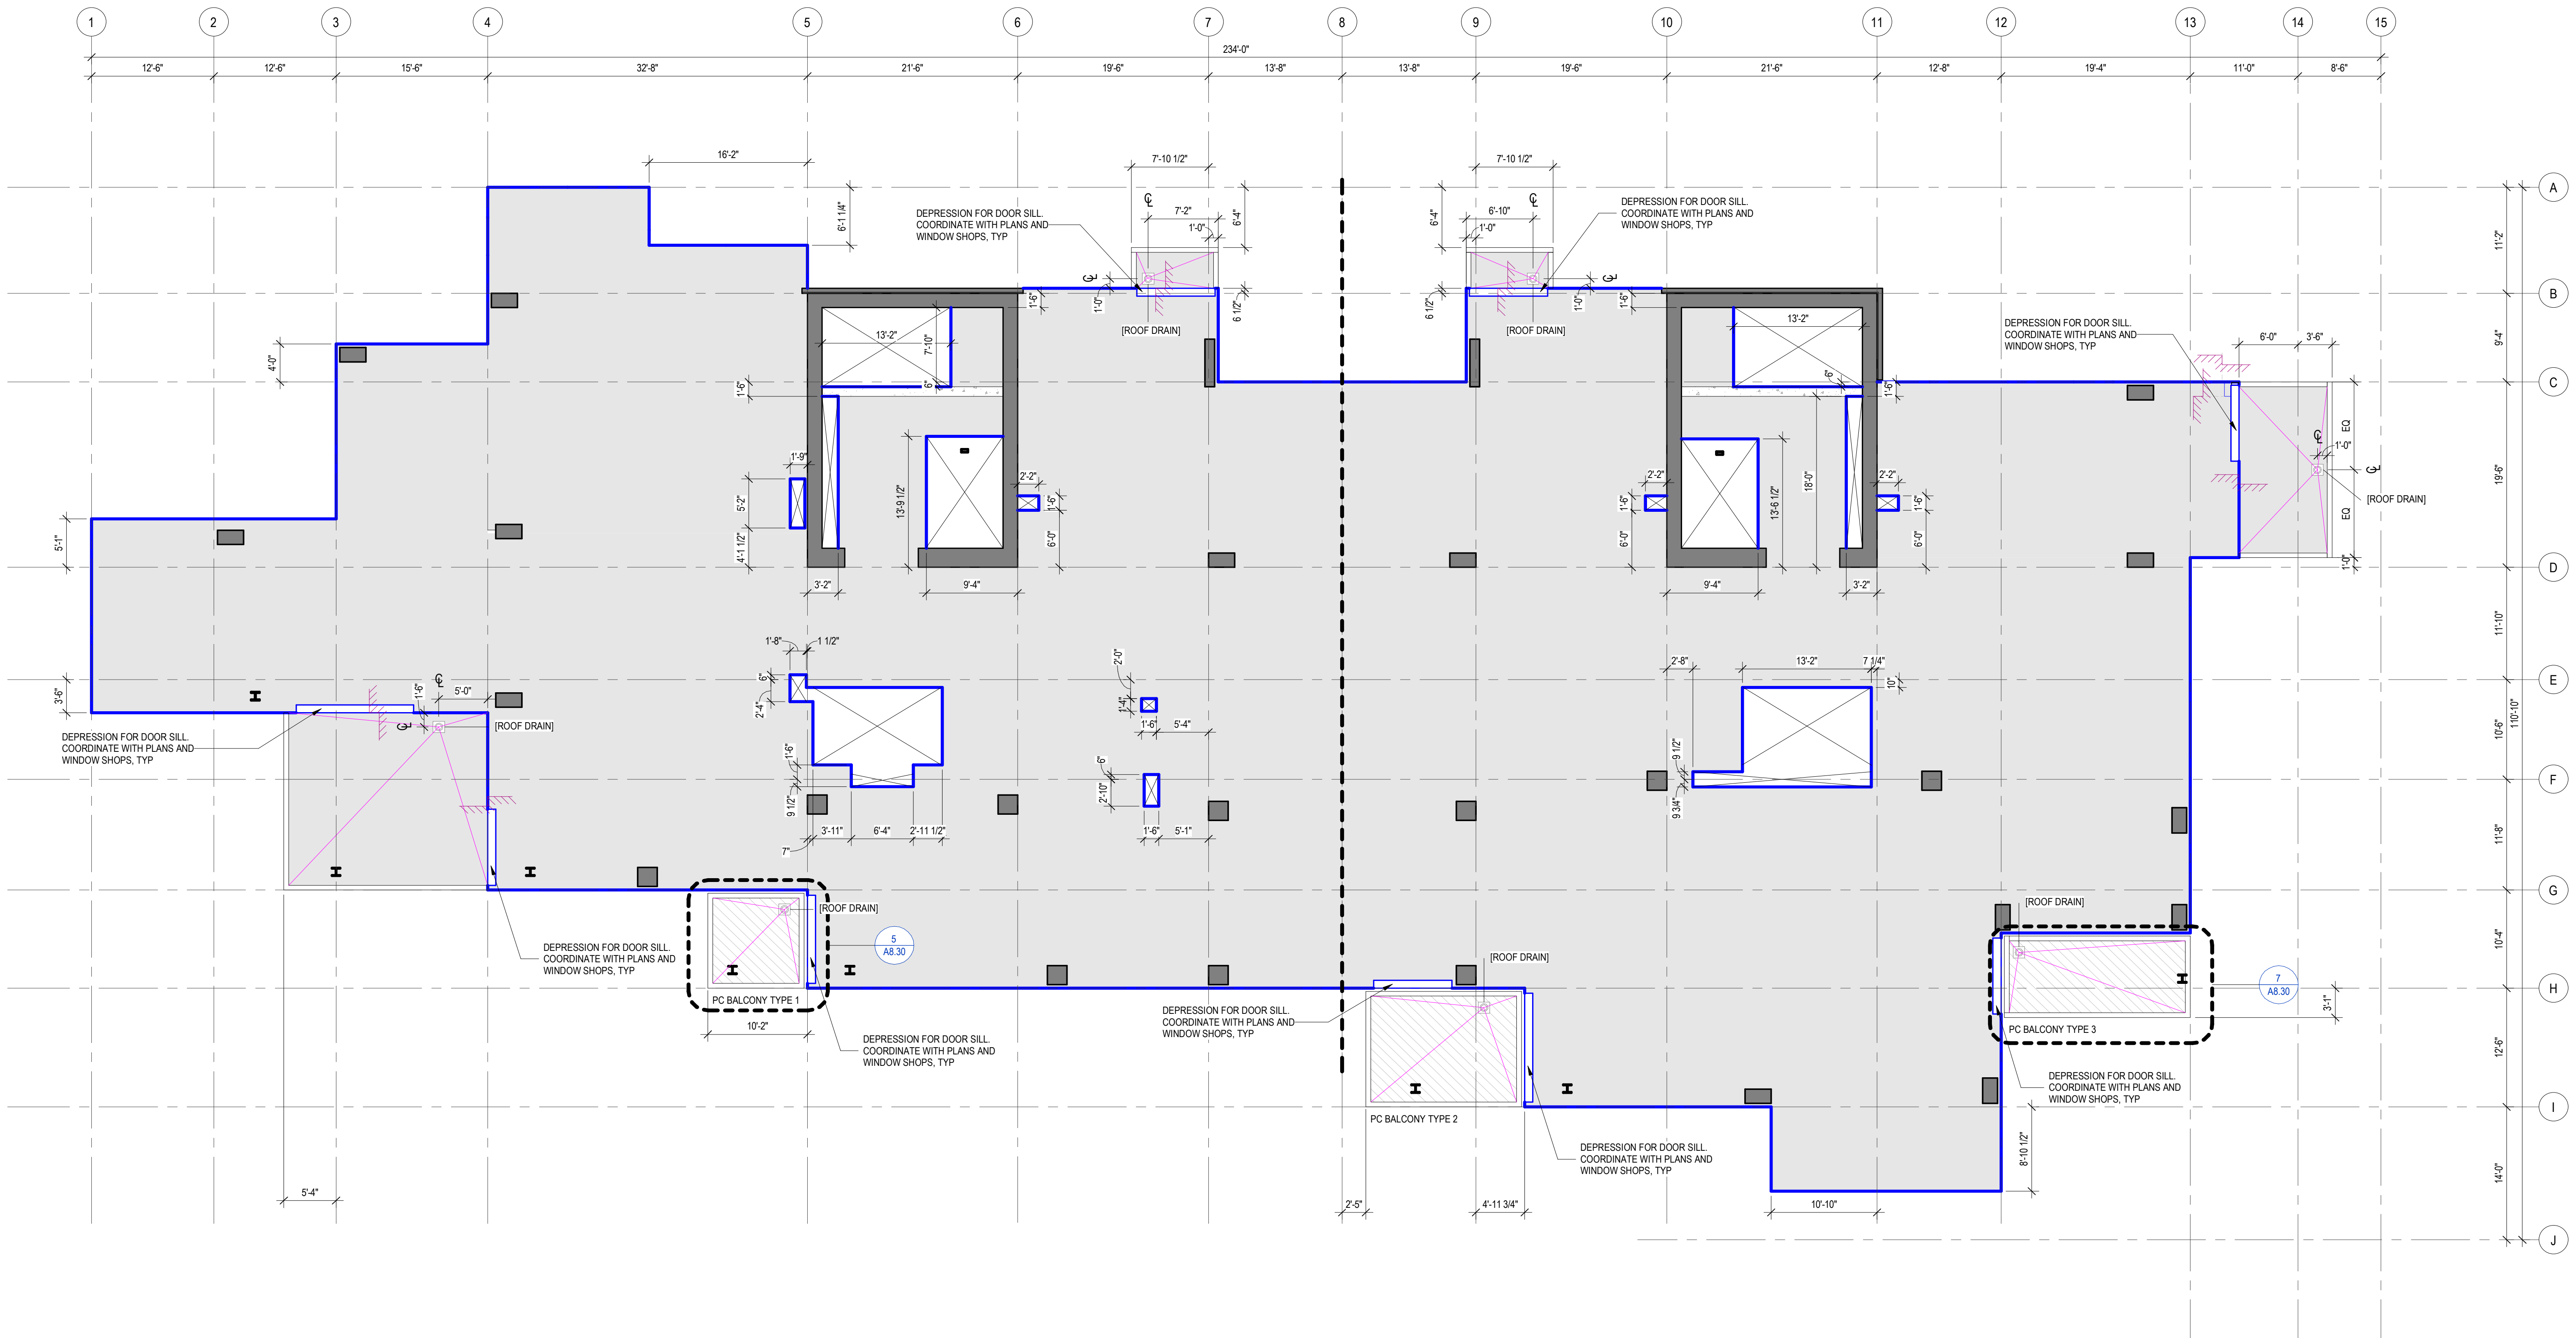

1 CONCRETE PLAN - TOWER A - LEVEL 4
SCALE: 1/8" = 1'-0"

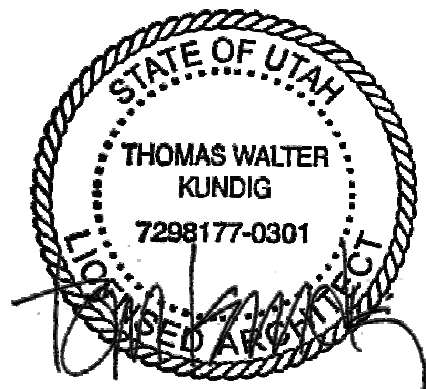

Olson Kundig

SOMMET BLANC
5500 PARASCA AVE
PARK CITY, UT 84060



Aspen Group USA, LLC
PO Box 980022
Park City, Utah 84098

Pool Consultant
Cloward H2O
2006 N University Ave, Suite 290
Provo, UT 84604

Landscape Architect
EPG Design
6949 South High Tech Drive, Suite 100
Midvale, Utah 84047

Specifications Writer
Friday Group
88 Marmel Road
Middlebury, VT

Code Consultant
Holmes
800 1st Avenue, Suite 200A
Seattle, WA 98104

Fire Protection Engineer
Jensen Hughes
One Research Drive, Suite 305C
Westborough, MA 01581

Vertical Transportation Consultant
Lerch Bates
19515 North Creek Parkway, Suite 304
Bellevue, WA 98011

Structural Engineer
Magnusson Klemencic Associates
1301 6th Ave, Suite 3200
Seattle, WA 98101

Lighting Designer
Q
1319 SE MLK Blvd, Suite 210
Portland, Oregon 97219

Building Envelope Consultant
RDH
2101 N 34th St
Seattle, WA 98103

Accessibility Consultant
Studio Pacifica
2144 Westlake Ave N, Suite F
Seattle, WA 98109

MEP Engineer
WSP USA
1001 Fourth Ave., Suite 3100
Seattle, WA 98154

principal architect... TK, KM
project manager... TM, JB, SL, MD
drawn by... SK, SS, JR, CP, EA
checked by... JB

job no. 2052
date 05/17/2024

revisions:

no. date by

IFC SET 2 OF 3
05/17/2024

CONCRETE PLAN -
TOWER A - LVL 4

A2.1A.14