

1. DIMENSIONS ARE TO FACE OF STUD OF EXTERIOR WALLS, CORRIDOR WALLS & INTERIOR WALLS, UNO.
2. DIMENSIONS ARE TO CENTERLINE OF DEMISING WALLS, UNO.
3. ALL EXPOSED STRUCTURAL STEEL, TO RECEIVE 1 HR INTERIOR PAINTING, UNO.
4. AT EXTERIOR EXTERIOR WALLS, FRAMES TO BE SET BACK 500 MM FACE OF CONCRETE TO ALLOW FOR FLUSH ALIGNMENT OF SHEATHING TO EDGE OF SLAB, UNO.
5. CASEWORK DIMENSIONS ARE TO FACE OF FINISH, UNO.
6. SEE SHEETS 40.10 AND 40.11 FOR ASSEMBLIES.
7. ALL CORRIDOR WALLS ARE TYPE E6, UNO.
8. ALL DEMISING WALLS ARE TYPE J6, UNO.
9. ALL INTERIOR PARTITIONS ARE TYPE A6, UNO.
10. ALL FURRING AROUND CONCRETE STRUCTURAL COLUMNS TYPE G1, UNO.
11. ALL VENT SHAFT WALLS ARE TYPE K4, UNO.
12. REFER TO LIFE SAFETY PLANS 40.30 - 40.34 FOR FULL EXTENT OF FIRE RATED WALLS.
13. UNIT PLAN LAYOUTS ON SHEETS 40.41A - 40.49.
14. ALL OWNER PARKING STALLS SHALL INCLUDE EV INFRASTRUCTURE.
15. REFER TO SHEET 40.08 FOR ANS1 TYPE A ACCESSIBILITY REQUIREMENTS.
16. REFER TO SHEET 40.07 FOR ANS1 TYPE A ACCESSIBILITY REQUIREMENTS.
17. REFER TO SHEET 40.06 FOR ADA PUBLIC SPACE ACCESSIBILITY REQUIREMENTS.
18. ALL MECHANICAL EQUIPMENT LOCATED WITHIN ELEVATOR/MECHANICAL EQUIPMENT ENCLOSURE.



9300 MARSAC AVE
PARK CITY, UT 84060




Engineer
USA
Fourth Ave., Suite 3100
e, WA 98154

sions:

date by

N - TOWER B - LVL 7

A2.2B.17

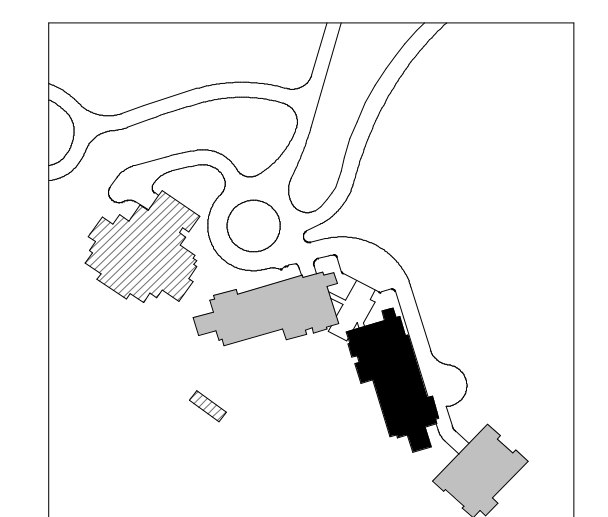

1 TOWER B - LEVEL 7
SCALE: 1/8" = 1'-0"