



2. DIMENSIONS ARE TO FACE OF STUD OF EXTERIOR WALLS, CORRIDOR WALLS & INTERIOR WALLS. UNO
3. DIMENSIONS ARE TO CENTERLINE OF DEMISING WALLS. UNO
4. ALL EXPOSED STRUCTURAL STEEL TO RECEIVE 1/8" MINIMUM PAINTING. UNO
5. ALL FRAMED EXTERIOR WALLS TO BE 16" MINIMUM THICK. 50% FROM FACE OF CONCRETE TO ALLOW FOR FLUSH ALIGNMENT OF SHEATHING TO EDGE OF SLAB. UNO
6. CASEWORK DIMENSIONS ARE TO FACE OF FINISH. UNO
7. SEE SHEETS A10 AND A011 FOR ASSEMBLIES.
8. ALL CORRIDOR WALLS IS RISE TYPE **E6**. UNO
9. ALL DEMISING WALLS ARE TYPE **J6**. UNO
10. ALL INTERIOR PARTITIONS ARE TYPE **A6**. UNO
11. ALL FURRING AROUND CONCRETE STRUCTURAL COLUMNS TYPE **G1**. UNO
12. ALL VENT SHAFT WALLS ARE TYPE **K4**. UNO
13. REFER TO LIFE SAFETY PLANS **A01** - **A04** FOR FULL EXTENT OF FIRE RATED WALLS.
14. UNIT PLAN LAYOUTS ON SHEETS **A24A** - **A24R**
15. ALL OWNER PARKING STALLS TO BE CONFORM TO VEHICULAR INFRASTRUCTURE.
16. REFER TO SHEET **A08** FOR ANY TYPE **2** ACCESSIBILITY REQUIREMENTS.
17. REFER TO SHEET **A07** FOR ANY TYPE **1** ACCESSIBILITY REQUIREMENTS.
18. REFER TO SHEET **A06** FOR ANY TYPE **3** ACCESSIBILITY REQUIREMENTS.
19. ALL MECHANICAL EQUIPMENT LOCATED WITHIN ELEVATOR MECHANICAL ENCLOSURE.



SOMMET BLANC
9300 MARSAC AVE
PARK CITY, UT 84060

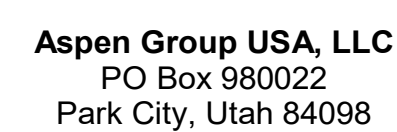

MEP Engineer
WSP USA
1001 Fourth Ave., Suite 3100
Seattle, WA 98154

no. date by

A2.3B.02d