


159 South Jackson St, Suite 600
Seattle, Washington 98104 USA
+1 206 624 5670 olson@undisg.com

Olson Kundig

project: **SOMMET BLANC**
9300 Marsac Ave (B2 East Parcel)
Park City, Utah 84060

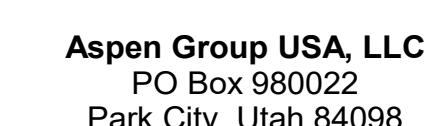

Pool Consultant
Cloward H20
2696 N University Ave, Suite 290
Provo, UT 84604

Landscape Architect
EPG Design
6949 South High Tech Drive, Suite 100
Midvale, Utah 84047

Specifications Writer
Friday Group
88 Mainelli Road
Middlebury, VT

Code Consultant
Holmes
600 1st Avenue, Suite 200A
Seattle, WA 98104

Fire Protection Engineer
Jensen Hughes
One Research Drive, Suite 305C
Westborough, MA 01581

Vertical Transportation Consultant
Lerch Bates
19515 North Creek Parkway, Suite 304
Bothell, WA 98011

Structural Engineer
Magnusson Klemencic Associates
1301 5th Ave, Suite 3200
Seattle, WA 98101

Lighting Designer
O-
1319 SE MLK Blvd, Suite 210
Portland, Oregon 97219

Building Envelope Consultant
RDH
2101 N 34th St
Seattle, WA 98103

Accessibility Consultant
Studio Pacifica
2144 Westlake Ave N, Suite F
Seattle, WA 98109

MEP Engineer
WSP USA
1001 Fourth Ave
Seattle, WA 98101

principal architect _____
project manager _____
drawn by _____
checked by Chacker
job no. _____
date 5/31/2024

revisions:

2 5/31/2024 EC-3

no.	date	by
-----	------	----

IFC Set 3 of 3

5/31/2024

10. *Journal of the American Medical Association*, 2000; 284: 1039-1044.

TOWER A - LVL 1

PLAN


M2 2A 11

SHEET NOTES:

- A. REFERENCE TO 4.04 SERIES FOR ENLARGED PLANS.
- B. FIREPLACE FLUE ROUTING SHOWN FOR REFERENCE. REFERENCE TO ENLARGED UNIT PLANS FOR ROUTING AND SIZING DETAIL.
- C. MECHANICAL EQUIPMENT SHOWN FOR REFERENCE. REFERENCE TO ENLARGED UNIT PLANS FOR DETAIL.
- D. EXHAUST SHALL PROVIDE 1/2" NET FREE OPENINGS IN ALL FULL HEIGHT, NON-PAVED WALLS FOR RETURN AIR PATHS IF NO DUCT TRANSFER IS SHOWN.
- E. ALL EQUIPMENT, INSULATION, WIRING, AND INFRASTRUCTURE IN THE PLenum SHALL BE PLenum RATED.
- F. FLEX DUCT SHALL NOT BE INSTALLED ABOVE FINISHED HARDWARE CEILING.
- G. PROVIDE RETURN TO THE TEMPERATURE CONTROL SYSTEM PLUS 10.0 DEGREES F. (SEE DETAIL 13, SHEET M5.04)
- H. PROVIDE REMOTE CABLE DAMPER OPERATOR IN DIFFUSERS ABOVE HARDWARE CEILING. (SEE DETAIL 9, SHEET M5.04)
- I. ALL COLD WATER AND HOT WATER BRANCH PIPING SHALL BE SIZED AT 1" FOR ALL FAN COIL UNITS UNLESS OTHERWISE NOTED.

 NUMBERED NOTES:

- 1 ROUTE CONDENSATE TO NEAREST SINK DRAIN AIR GAP FITTING. SEE 3/M5.04
2 GRILL AND DUCTWORK BACK TO BRANCH LINE SHALL BE STAINLESS STEEL CONSTRUCTION
3 3" FREE AIR GAP ALONG THIS WALL FOR RETURN AIR. SEE ARCH DRAWINGS
4 PROTECT EXHAUST/INTAKE DUCT OPENING INTO WELL WITH WMS.

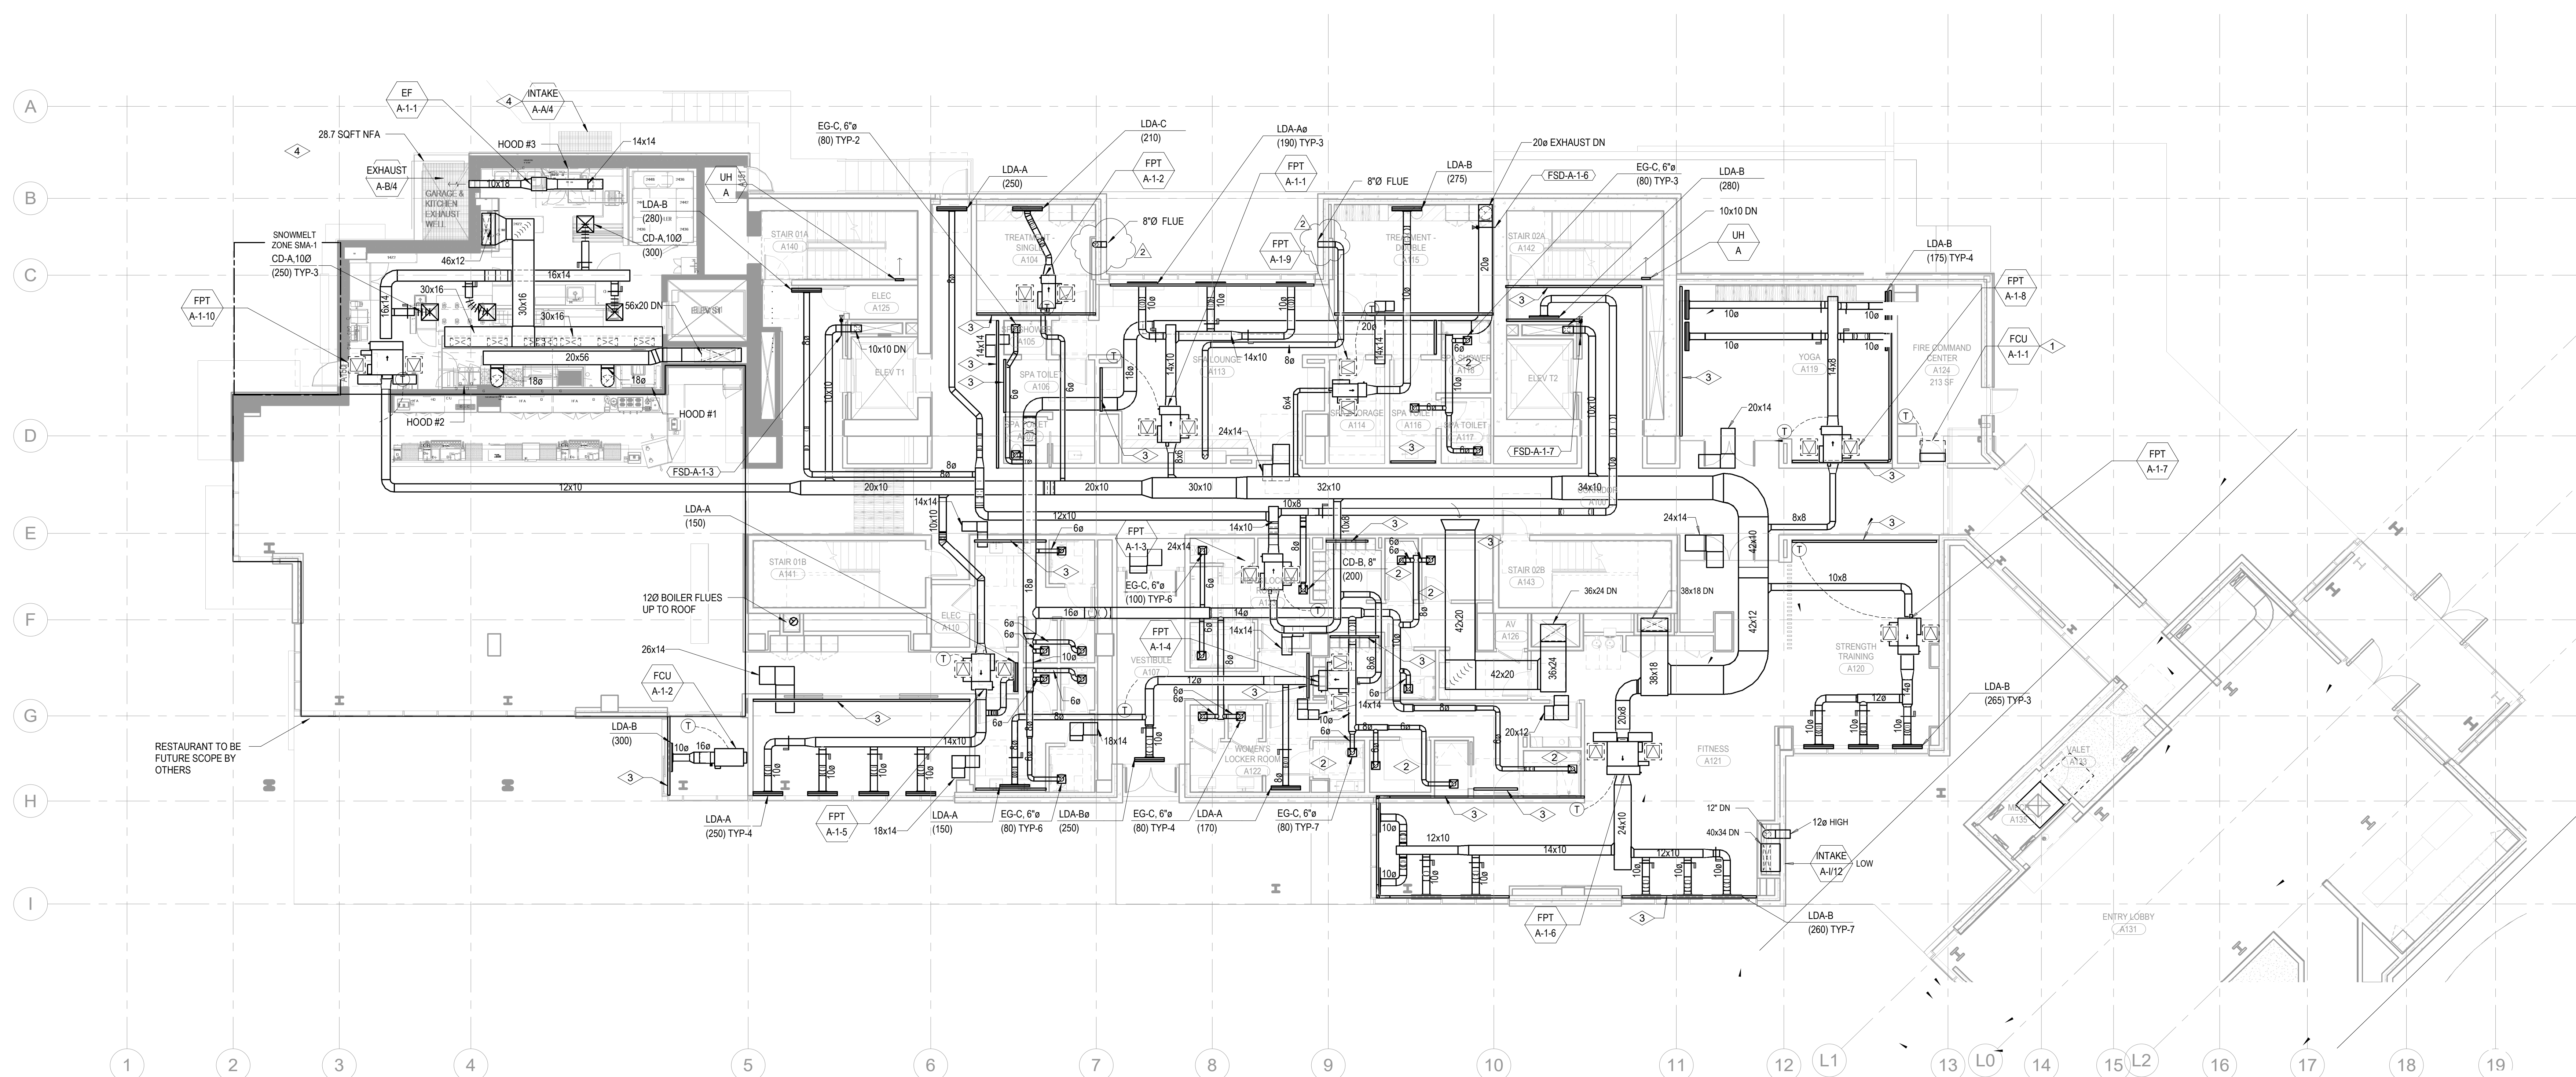

1 TOWER A - LEVEL 1 MECHANICAL DUCT PLAN
SCALE: 1/8" = 1'-0"

