

RCP GENERAL NOTES

1. SPOT ELEVATIONS ARE RELATIVE TO FINISH FLOOR LEVEL AND INDICATE BOTTOM OF FINISH 2. ALL CEILINGS 9'-0" AFF U.N.O.

3. ALL CEILINGS ASSEMBLY C11 U.N.O. 4. ALL DIMENSIONS TO FACE OF FINISH U.N.O.

5. SEE CONCRETE PLANS FOR EXTENT OF CONCRETE SLABS AND BEAMS 6. OCCUPIABLE SPACES, HABITABLE SPACES AND CORRIDORS SHALL HAVE A CEILING HEIGHT OF NOT LESS THAN 7 FEET AND 6 INCHES. BATHROOMS, TOILET ROOMS, KITCHENS, STORAGE ROOMS AND LAUNDRY ROOMS SHALL HAVE A CEILING HEIGHT OF NOT LESS THAN

7. SEE SHEET A0.10 AND A0.11 FOR FLOOR/CEILING ASSEMBLIES. 8. SEE ELECTRICAL AND LIGHTING DRAWINGS FOR LIGHTING LAYOUTS AND ADDITIONAL INFORMATION NOT SHOWN ON ARCHITECTURAL RCP DRAWINGS. 9. REFER TO MECHANICAL FOR SPRINKLER AND EXTINGUISHER TYPE AND FOR LOCATIONS. 10. ALL WALL-MOUNTED FIXTURES IN COMMON AREAS AND AMENITY LEVELS TO PROJECT 4"


DETECTORS, TYPICAL. LOCATION AND SPACING TO BE DETERMINED WITH APPROVED SHOP DRAWINGS. PROVIDE SIDE ARMS WHERE HEADS AND OTHER CEILING FIXTURES MAY BE IN CONFLICT. ALIGN ALL HEADS AND FIXTURES ORTHAGONALLY. 13. FIRE-RATED CEILINGS SHALL ALWAYS BE CONTINUOUS ABOVE DROPPED CEILINGS OR SOFFITS WITH FASTENING AND JOINT TAPE AS REQUIRED FOR SPECIFIED RATING. 14. FIRE-RATED CEILINGS SHALL ALWAYS BE CONTINUOUS OVER CHASES/FURRED-OUT SPACES TO PREVENT THE WALL CAVITY FROM COMMUNICATING WITH THE FLOOR/CEILING CAVITY. FIRESTOP ALL PENETRATIONS OF FIRE-RATED FLOOR/CEILING ASSEMBLIES. 15. SEE MECHANICAL DRAWINGS FOR DUCT ROUTING. SEE MECHANICAL DRAWINGS FOR

16. CEILING ACCESS PANELS ARE REQUIRED AT ALL DAMPERS, VALVES, TELECOM ACCESS POINTS, AND SOME MECHANICAL EQUIPMENT. COORDINATE LOCATIONS PRIOR TO INSTALLATION OF ANY OF THESE SYSTEMS

ELECTRICAL AND MECHANICAL INFORMATION ARE SHOWN FOR COORDINATION PURPOSES. REFER TO MECHANICAL DRAWINGS AND ELECTRICAL DRAWINGS FOR GENERAL INFORMATION

RCP LEGEND

HATCH PATTERN INDICATE EXTENT OF CEILING TYPES REFER TO CEILING ASSEMBLY FOR DETAIL INFORMATION

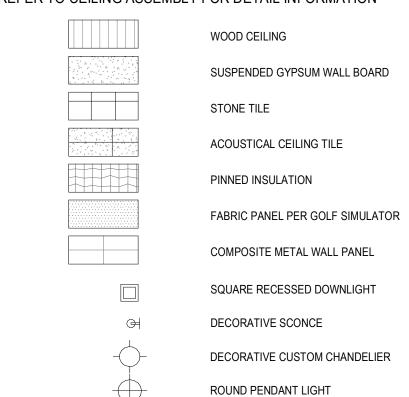

LENSED LINEAR UTILITY STRIP CONCEALED LINEAR UNDERCABINET STRIP TRACK / RAIL / LINEAR LED

SURFACE-MOUNTED LIGHT BAR


SURFACE MOUNT PANEL SPRINKLER SMOKE DETECTOR COMBINATION SMOKE / CARBON MONOXIDE DETECTOR FIRE ALARM SPEAKER FIRE ALARM STROBE FIRE ALARM COMBINATION SPEAKER / STROBE COMBINATION SMOKE / HEAT DETECTOR

SECURITY CAMERA WIRELESS ACCESS POINT AV SPEAKER MOTORIZED SINGLE ROLLER SHDAE - EQ-02.00 MOTORIZED DOUBLE ROLLER SHDAE - EQ-02.01 CEILING FAN - MECH EXHAUST

MECHANICAL LINEAR GRILLE

CEILING ACCESS PANEL CEILING CONTROL POINT

ELEVATION CHANGE RETURN AIR GRILLE



• —

Kundig

ASPEN GROUP Aspen Group USA, LLC PO Box 980022 Park City, Utah 84098

2696 N University Ave, Suite 290 Provo, UT 84604 <u>Landscape Architect</u> **EPG Design**6949 South High Tech Drive, Suite 100

Specifications Writer Friday Group 88 Mainelli Road Middlebury, VT Code Consultant
Holmes

Midvale, Utah 84047

Seattle, WA 98104 Fire Protection Engineer
Jensen Hughes
One Research Drive, Suite 305C Westborough, MA 01581

600 1st Avenue, Suite 200A

Vertical Transportation Consulatant Lerch Bates 19515 North Creek Parkway, Suite 304 Bothell, WA 98011

Structural Engineer
Magnusson Klemencic Associates 1301 5th Ave, Suite 3200 Seattle, WA 98101 <u>Lighting Designer</u>

1319 SE MLK Blvd, Suite 210 Portland, Oregon 97219 Building Envelope Consultant RDH 2101 N 34th St Seattle, WA 98103

Accessibility Consultant
Studio Pacifica 2144 Westlake Ave N, Suite F Seattle, WA 98109

1001 Fourth Ave., Suite 3100

Seattle, WA 98154

principal architect TK, KM project manager TM, JB, SL, MD checked by JB job no. 20052

IFC SET 3 OF 3 05/31/2024

no. date

RCP - TOWER B - LVL 1 -AREA D A6.1B.11d

