

LOAD MAP KEY:

A 1

NUMBER INDICATES SUPERIMPOSED DEAD LOAD MARK

LETTER INDICATES LIVE LOAD MARK


	LETTER INDICATES LIVE LOADING		E SLIDENCE ADE					
INDICATE SIVE A DIAIDI (LLO BESIGNA TIMBAS PER SQUARE FOOT OF SURFACE ARE SEE "CLADDING LOAD NOTES" DETAIL AT THE END OF LOAD MAPS. MARK USE LIVE LOAD (PSF)								
MARK	USE	LIVE LOAD (PSF)						
Α	RESIDENTIAL	40(R)						
В	MECHANICAL / ELECTRICAL	125						
С	PARKING	40(R) (20%)						
D	LIGHT STORAGE	125						
E	ASSEMBLY / CORRIDORS	100						
F	BALCONY	60(R)						
G	ROOF	20(R)						
I	GROUND LOBBY	100						
J	OFFICE	60 + 15 PARTITION LOAD						
K	AMENITY	100						
N	GROUND FLOOR TERRACE	100						

				FLOOD	T	T	
MAR K	TYPE	TOTAL SDL (PSF)	CEILING/M EP LOAD (PSF)	FLOOR FINISH LOAD (PSF)	PARTITIO N LOAD (PSF)	SPECIAL LOAD (PSF)	SPECIAL LOAI DESCRIPTION
1	RESIDENTIAL	30	5	5	20		
2	MECHANICAL / ELECTRICAL	15	10		5		
3	PARKING	5	5				
4	LIGHT STORAGE	15	10		5		
5	CORRIDORS	15	10		5		
6	BALCONY	75	10	15		50	INSULATION + TOPPING SLAB
7	RETAIL	60	10			50	BUILT UP SLAB
8	GROUND LOBBY	60	10	40	10		
9	OFFICE	15	10	5			
10	AMENITY	30	10	15	5		
11	FITNESS	65	5	5	5	50	ISOLATION SLA
12	GREEN ROOF	40	10	5		25	INSULATION + LIGHT GREEN ROOF
13	ROOF	25	10			15	INSULATION + ROOFING
14	DEEP SOIL	330	10			320	SOIL DEPTH TB

LOAD MAP NOTES:

- LIVE LOADS MARKED (R) ARE REDUCIBLE IN ACCORDANCE WITH THE BUILDING CODE.
- 2. SUPERIMPOSED DEAD LOADS ARE IN ADDITION TO THE SELF-WEIGHT OF THE STRUCTURE. BUILT-UP SLABS SHOWN ON PLAN ARE CONSIDERED TO BE PART OF THE SELF-WEIGHT OF THE STRUCTURE.
- 3. SEE FRAMING PLANS FOR DESIGN LOAD OF SPECIFIC ITEMS SUCH AS ELEVATORS, ESCALATORS, AND MECHANICAL / ELECTRICAL EQUIPMENT.

LOAD MAP NOTES AND DESIGNATIONS

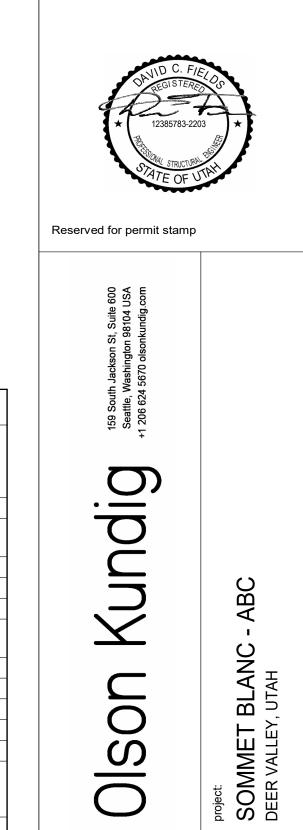

MAGNUSSON KLEMENCIC

Structural + Civil Engineers

ASSOCIATES

Seattle Chicago www.mka.com 206 292 1200

LOAD MAPS

S1.03

