

NOTES: TOWER A LEVEL 4: 8383'-0" TOWER A LEVEL 6: 8407'-6"

1. REFERENCE FLOOR ELEVATIONS ARE:

NOTES DECK THICKNESS. 1/8" = 1'-0"


REFERENCE DRAWINGS

S3.XX ELEVATIONS

S2.XX PLANS

S1.XX LOAD DIAGRAMS

S0.XX

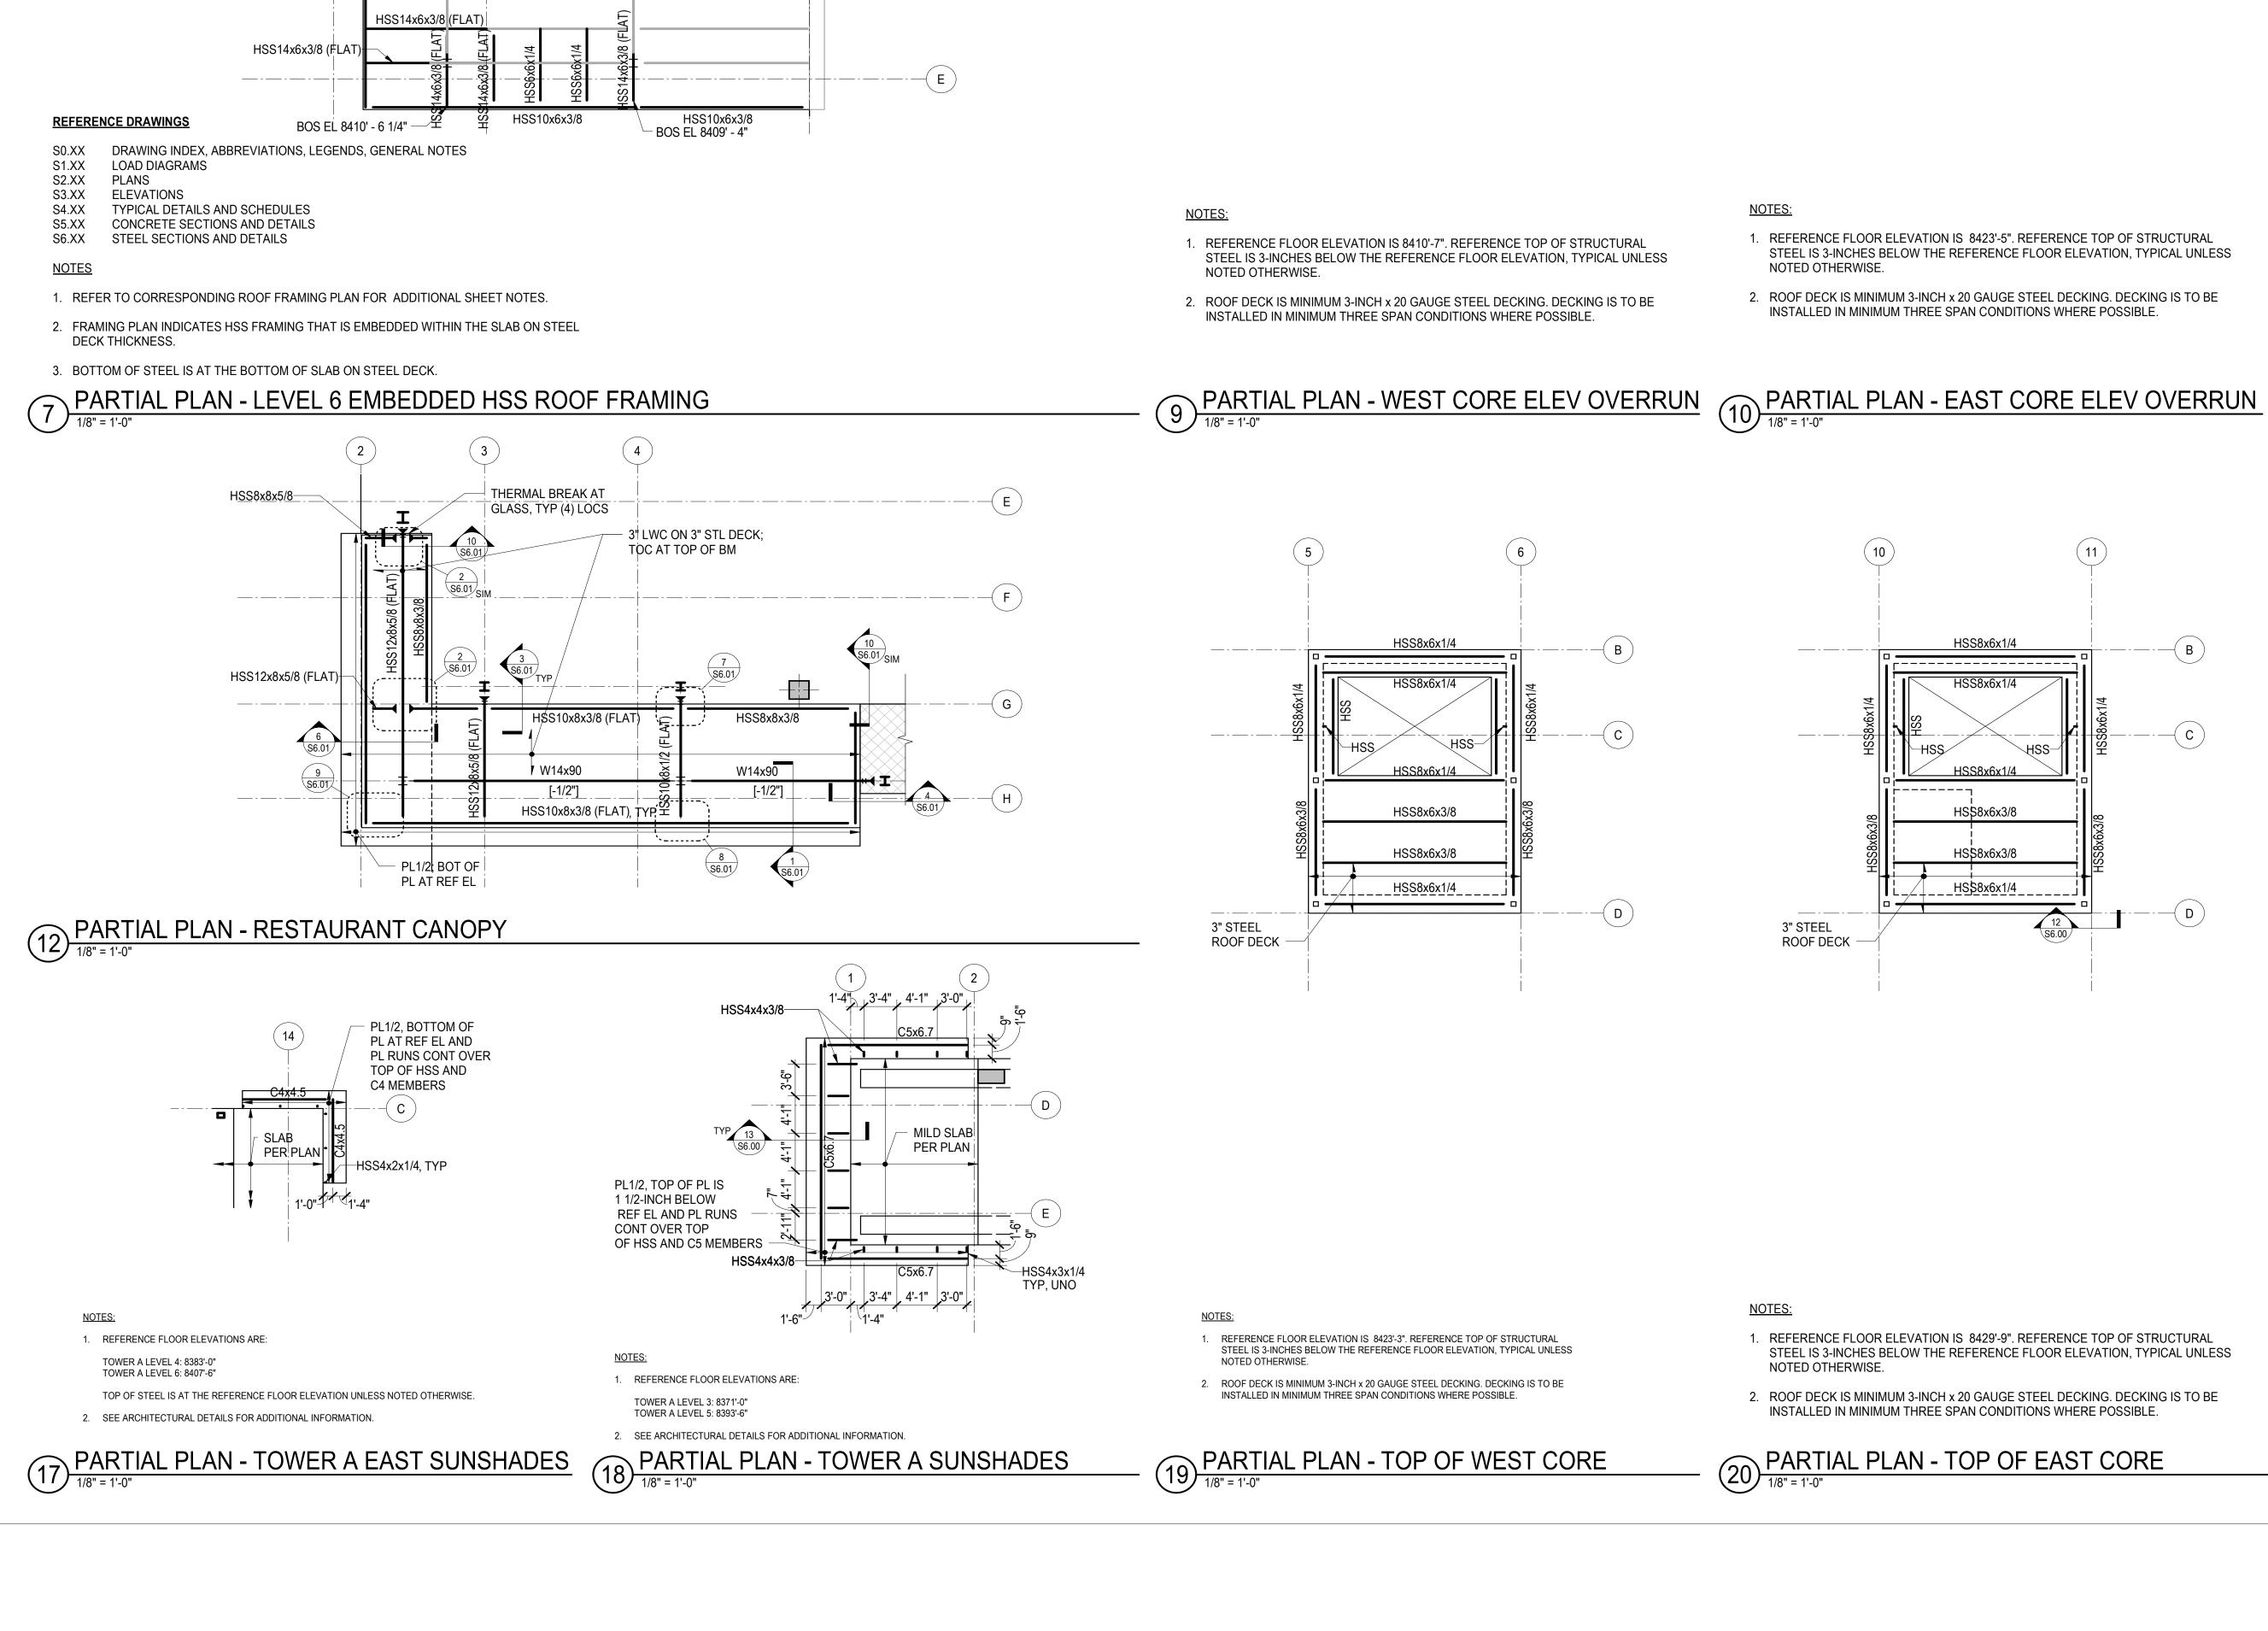

DRAWING INDEX, ABBREVIATIONS, LEGENDS, GENERAL NOTES S4.XX TYPICAL DETAILS AND SCHEDULES


3


HSS14x6x3/8 (FLA


(4

HSS10x6x3/8







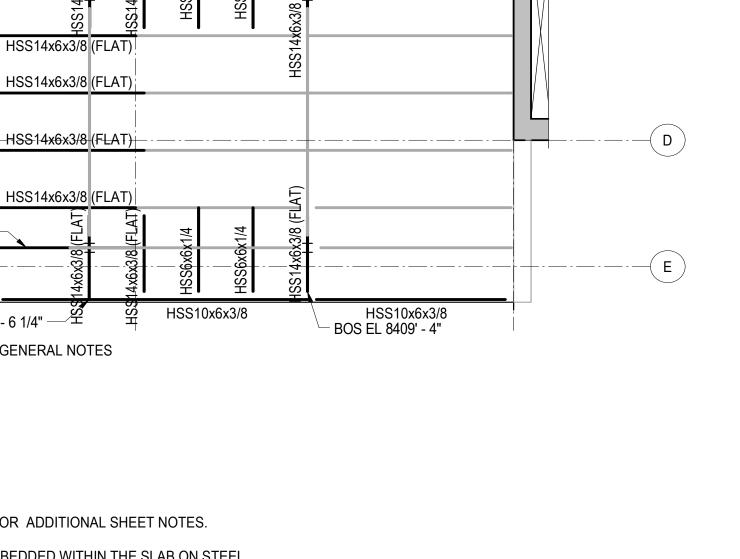

-HSS10x6x3/8-

5

HALFTONE INDICATES WF ROOF FRMG

----- B


—--(C)

PER S2.A.16

20 PARTIAL PLAN - TOP OF EAST CORE

- NOTED OTHERWISE. 2. ROOF DECK IS MINIMUM 3-INCH x 20 GAUGE STEEL DECKING. DECKING IS TO BE INSTALLED IN MINIMUM THREE SPAN CONDITIONS WHERE POSSIBLE.
- 1. REFERENCE FLOOR ELEVATION IS 8429'-9". REFERENCE TOP OF STRUCTURAL STEEL IS 3-INCHES BELOW THE REFERENCE FLOOR ELEVATION, TYPICAL UNLESS

NOTES:

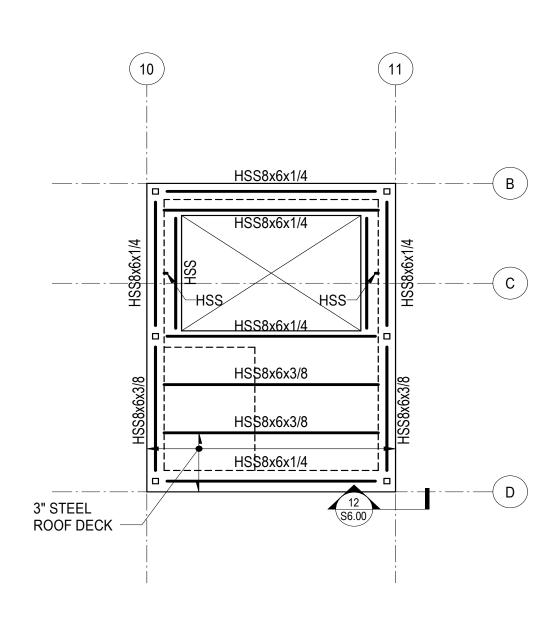

- 2. ROOF DECK IS MINIMUM 3-INCH x 20 GAUGE STEEL DECKING. DECKING IS TO BE INSTALLED IN MINIMUM THREE SPAN CONDITIONS WHERE POSSIBLE.
- NOTES: 1. REFERENCE FLOOR ELEVATION IS 8423'-5". REFERENCE TOP OF STRUCTURAL STEEL IS 3-INCHES BELOW THE REFERENCE FLOOR ELEVATION, TYPICAL UNLESS NOTED OTHERWISE.

