


NOTES:

1. STAGGERED CONDITION APPLIES TO ALL TOP BARS EXCEPT HOOKED BARS AT SLAB EDGES.


9 TYPICAL MILD SLAB TOP REINFORCING PLACEMENT

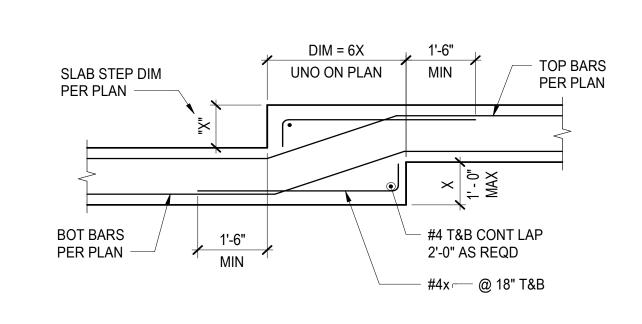

NOTES:


1. THIS DETAIL ONLY APPLIES TO MILD REINFORCED SLABS.

TYPICAL MILD SLAB STEP REINFORCING

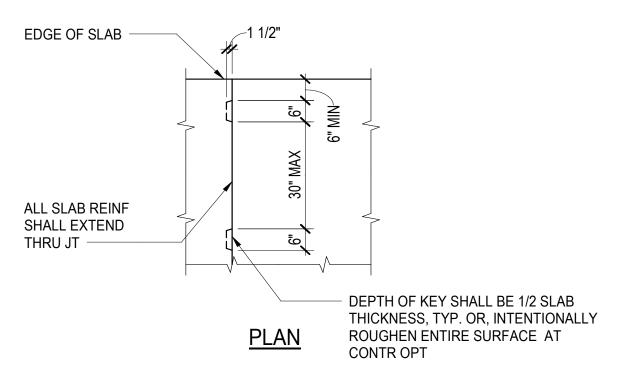


NOTES:

- 1. LOCATE ALL CONSTRUCTION JOINTS WITHIN THE MIDDLE THIRD OF THE SPAN. SUBMIT LOCATIONS OF ALL CONSTRUCTION JOINTS TO ENGINEER FOR REVIEW AND ACCEPTANCE PRIOR TO FORMING.
- 2. PROVIDE #4x5'-0" @ 24" CENTERED ACROSS CONSTRUCTION JOINT AT LOCATIONS WHERE TOP SLAB REINFORCING IS NOT SPECIFIED PER PLAN.

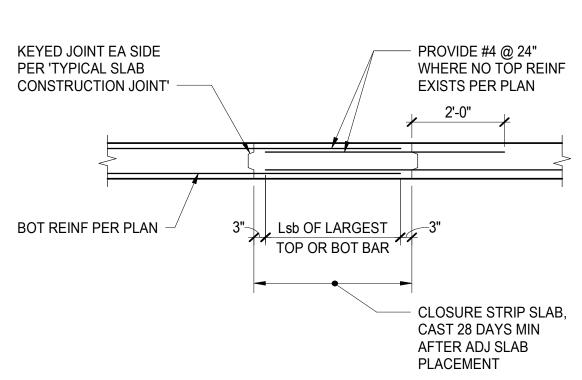


NOTES:

- 1. SHORE SLAB UNTIL CLOSURE STRIP REACHES 28 DAY DESIGN STRENGTH. 2. REINFORCING IN OPPOSITE DIRECTION IS PER PLANS.
- TYPICAL MILD SLAB CLOSURE STRIP

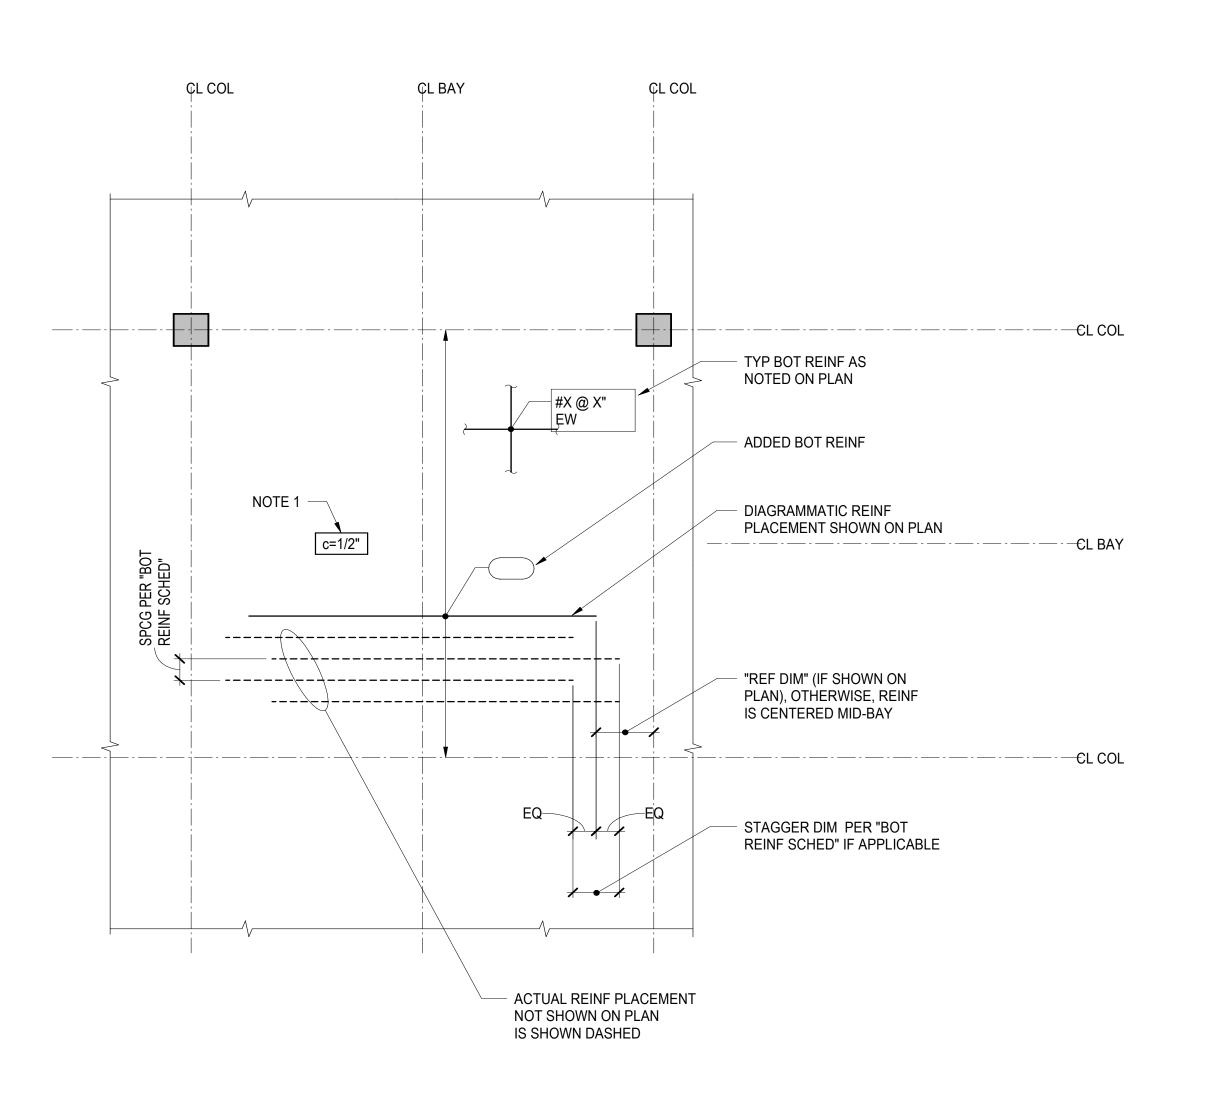

NOTES:

- 1. WHEN NO EXTENT LINES EXIST AT MILD SLAB CAMBER, A SINGLE HIGH POINT AT MID-BAY IS INDICATED. THE SURROUNDING SLAB SLOPES AWAY TOWARD THE ADJACENT COLUMNS OR WALLS.
- (19) TYPICAL MILD SLAB BOTTOM REINFORCING PLACEMENT

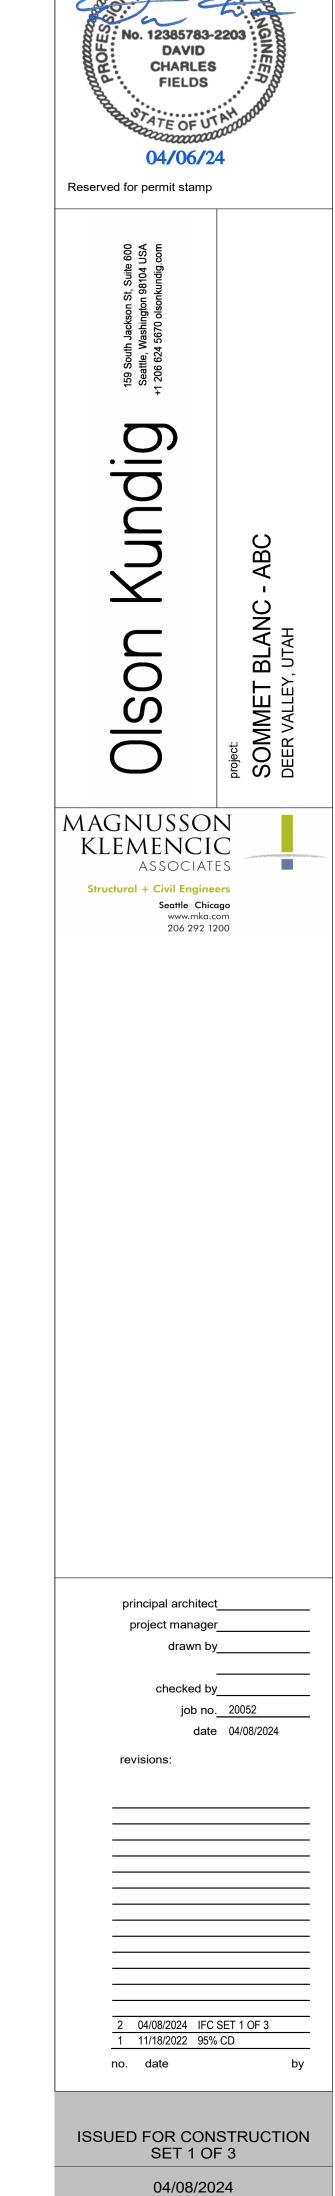

TYPICAL MILD SLAB

DETAILS

S4.04