

1. WHERE WALLS ALIGN TO GRID, LOCATE FACE OF STUDT OR FACE OF CONCRETE AT GRID. U.N.O.
2. FINISH FLOOR ELEVATION TO TYPE, ACROSS LEVEL. U.N.O.
3. REFER TO 10.0 AND 10.1 FOR FLOOR SLABS.
4. ALL DIMENSIONS ARE TO FACE OF CONCRETE AND CENTERLINE OF CONCRETE COLUMN. U.N.O.
5. TO CURBS $A \times F.F.$ MAXIMUM $A \times F.F.$, WHERE SLAB IS SLOPED, U.N.O.
6. MIN. 1% SLOPE TO DRAIN.
7. TOP OF CONCRETE SLAB ELEVATIONS PROVIDED FOR REFERENCE. CONTRACTOR SHALL COORDINATE WITH FINISH FLOOR ELEVATIONS PROVIDED ON ARCHITECTURAL PLANS AND ADJUST ELEVATIONS AS NECESSARY.
8. CEILING HEIGHTS MEASURED FROM TOP OF CONCRETE - SEE SECTIONS.
9. COORDINATE WITH ALL OTHER TRADES FOR ELEVATIONS, LOCATIONS AND DETAILS.
10. COORDINATE WITH STRUCTURAL FRAMING PLANS AND SHEAR WALL PLANS FOR SIZE, DETAILS, AND REINFORCING FOR COLUMNS, BEAMS, SHEAR WALLS, ETC.
11. COORDINATE WITH ELECTRICAL, MECHANICAL, PLUMBING, POWER, AND DATA REQUIREMENTS.
12. COORDINATE WITH MECHANICAL DRAWINGS FOR ALL PLUMBING AND MECHANICAL PENETRATIONS.

-

SLAB PENETRATION
-


SLAB STEP SYMBOL
-

SLAB SLOPE SYMBOL
-


CONCRETE SLAB - STRUCTURAL
-

AREA OF RECESSED SLAB - STRUCTURAL / ARCHITECTURAL
-

AREA OF OVERBUILT SLAB - ARCHITECTURAL

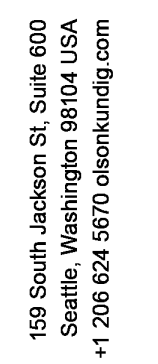

SOMMET BLANC
9300 MARSAC AVE
PARK CITY, UT 84060



SP USA
101 Fourth Ave., Suite 3100
Seattle, WA 98154

revisions:

C 07/26/24	ASI2	
A 05/17/24	IFC - REV 1	
no.	date	by

A2.1C.01

