SOMMET BLANC

Location: 9300 Marsac Avenue (B2 East Parcel), Park City, Utah

Project Number: 20052

EQ-04.01

IFC Issuance: 07/19/2024

Product Info

Manufacturer: Dacor

Style/Series: 48" Contemporary Dual Fuel Steam Range

Description: Gas Range

Sales Rep

Primary

Shay Devenport

Email: Shay@mld.com Office Phone: 801-415-1610

Attributes

Location: Units - Kitchen Product: DOP48M86D

Dimension: 47 7/8" W X 36-1/8" H X 27 1/2" D

PALETTE | FINISH OPTION Air: Stainless Steel Earth: Graphite

Notes

Scope - MLD



Seattle, Washington

Olson Kundig

Provide Manufacturer's warranty information
 Provide manufacturer's assembly instructions including a list pf parts included in all shipments.
 Olson Kundig owns all copyrights to the design of custom products. Photography of product is prohibited without the expressed written consent by Olson Kundig.
 All drawings provided are for reference only, and not for construction



48-INCH 6-BURNER DUAL-FUEL STEAM RANGE

DOP48M86D | MODERNIST COLLECTION



AVAILABLE MODELS

DOP48M86DLS Stainless Steel, Natural Gas DOP48M86DPS Stainless Steel, Liquid Propane DOP48M86DHS Stainless Steel, Natural Gas/High Altitude DOP48M86DAS Stainless Steel, Liquid Propane/High Altitude Graphite Stainless Steel, Natural Gas DOP48M86DLM Graphite Stainless Steel, Liquid Propane DOP48M86DPM DOP48M86DHM Graphite Stainless Steel, Natural Gas/High Altitude DOP48M86DAM Graphite Stainless Steel, Liquid Propane/High Altitude

FEATURES & BENEFITS

- → Exclusive Four-Part Dual Pure Convection heat, air, baffle, and filter to precisely distribute heat for superior cooking results.
- → Real Steam™ and Convection Oven the power of steam and convection cooking in one.
- → Large oven capacity 4.8 cu. ft. / 1.8 cu. ft.
- → 6 Dual-Stack Sealed Burners with 15" continuous cast iron grate.
- Powerful 22K BTU and true simmer burners.
- → Illumina™ Knobs and Ambient Light.
- → 7" LCD Control Panel.
- Dacor iQ Kitchen app with integrated Wi-Fi to control and monitor remotely.
- Auto connect to hood.

ACCESSORIES (INCLUDED)	
GLIDERACK™	2 (LG)
STANDARD RACK	1 (LG) / 1 (SM)
TEMPERATURE PROBE	1 EA (BOTH)
WOK RING	1
CONVECTION FILTER	2 (LG) / 1 (SM)
STEAM TRAY	2 (SM)
HALF STEAM TRAY	2 (SM)
BRASS/BLACK BURNER CAPS	YES

ACCESSORIES (OPTIONAL)	
COOKIE SHEETS (SET OF 3)	SKU - ACSM303
GRIDDLE	TBD
GENERAL PROPERTIES	
COOKING MODES LARGE CAVITY	BAKE - BROIL - CONVECTION BAKE - CONVECTION ROAST - CONVECTION BROIL - FOUR-PART PURE CONVECTION - PURE CONVECTION SEAR
COOKING MODES SMALL CAVITY	BAKE - BROIL - CONVECTION BAKE - CONVECTION ROAST - CONVECTION BROIL - FOUR-PART PURE CONVECTION - REAL STEAM - STEAM BAKE - STEAM ROAST
OVEN CAPACITY (CUBIC FEET)	4.8 (LG OVEN) / 1.8 (SM OVEN)
OVEN BEBEORYANICE	
OVEN PERFORMANCE	
BAKE ELEMENT	3,000W - 8 PASS (LG) 1,000W (SM)
BAKE ELEMENT	1,000W (SM) 4,400W - 10 PASS (LG)
BAKE ELEMENT BROIL ELEMENT	1,000W (SM) 4,400W - 10 PASS (LG) 2,400W (SM) 1,300W (EA - 2,600W TOTAL)
BAKE ELEMENT BROIL ELEMENT CONVECTION ELEMENT	1,000W (SM) 4,400W - 10 PASS (LG) 2,400W (SM) 1,300W (EA - 2,600W TOTAL) (LG) / 2,000W (SM)
BAKE ELEMENT BROIL ELEMENT CONVECTION ELEMENT STEAM HEATER	1,000W (SM) 4,400W - 10 PASS (LG) 2,400W (SM) 1,300W (EA - 2,600W TOTAL) (LG) / 2,000W (SM)
BAKE ELEMENT BROIL ELEMENT CONVECTION ELEMENT STEAM HEATER BURNER PERFORMANCE	1,000W (SM) 4,400W - 10 PASS (LG) 2,400W (SM) 1,300W (EA - 2,600W TOTAL) (LG) / 2,000W (SM) 2,000W (SM)
BAKE ELEMENT BROIL ELEMENT CONVECTION ELEMENT STEAM HEATER BURNER PERFORMANCE TOTAL NUMBER OF COOKTOP BURNERS	1,000W (SM) 4,400W - 10 PASS (LG) 2,400W (SM) 1,300W (EA - 2,600W TOTAL) (LG) / 2,000W (SM) 2,000W (SM)
BAKE ELEMENT BROIL ELEMENT CONVECTION ELEMENT STEAM HEATER BURNER PERFORMANCE TOTAL NUMBER OF COOKTOP BURNERS LEFT FRONT (BTU)	1,000W (SM) 4,400W - 10 PASS (LG) 2,400W (SM) 1,300W (EA - 2,600W TOTAL) (LG) / 2,000W (SM) 2,000W (SM) 6 18,000 DUAL (SIMMER)
BAKE ELEMENT BROIL ELEMENT CONVECTION ELEMENT STEAM HEATER BURNER PERFORMANCE TOTAL NUMBER OF COOKTOP BURNERS LEFT FRONT (BTU) LEFT REAR (BTU)	1,000W (SM) 4,400W - 10 PASS (LG) 2,400W (SM) 1,300W (EA - 2,600W TOTAL) (LG) / 2,000W (SM) 2,000W (SM) 6 18,000 DUAL (SIMMER) 16,000 STACK DUAL (SIMMER)

CONTROL FEATURES	
CONTROL FEATURES	
NUMBER OF KNOBS	6 + 2 LAMP KNOBS
CONTROL METHOD	7" POP-UP LCD
WIFI	YES
BLUETOOTH (HOOD CONNECTION)	YES
ILLULMINA™ BURNER KNOBS	YES
HIGHLIGHTING COLOR	WHITE
AMBIENT LIGHTING	YES (DIMMING)
CLOCK	YES
DELAY START	YES
KITCHEN TIMER	YES
TIME OF DAY (12 HR/24 HR)	YES
TEMPERATURE (F / C)	YES
CHILD LOCK	YES
SOUND ON/OFF	YES
MANUAL LIGHTING ON/OFF	YES

9,000 STACK DUAL (SIMMER)

YES

YES

RIGHT REAR (BTU)

SEALED BURNERS

PERMA-FLAME™ (AUTO RE-IGNITION)



ADDITIONAL FEATURE	S
CLEANING TYPE	SELF CLEAN (PRIMARY) GREENCLEAN™ (BOTH OVENS)
TYPE OF GRATE	CONTINUOUS CAST IRON
CAVITY	BLACK ENAMEL COATING
RACK POSITIONS	6 (LG) / 4 (SM)
CONVECTION TYPE	DUAL (LG) / SINGLE (SM)
LIGHTING	BRIGHTVUE™ - LED + HALOGEN
ADDITIONAL MODES	
KEEP WARM	YES (BOTH)
LOW PROOF	YES (LG) - STEAM (SM)
PROOF	YES (LG) - STEAM (SM)
STONE MODE	YES (LG)
DEHYDRATE	YES (LG)
GOURMET COOK	YES (LG)
SABBATH	YES
ADDITIONAL STEAM MODES	
FINE STEAM	YES (SM)
GUIDED STEAM	YES (SM)
RECOVERY HEAT (AUTO REHEAT)	YES (SM)
OPTIONAL MODES	
TEMPERATURE PROBE	YES (BOTH)
INSTANTHEAT (NO PREHEAT)	YES (LG) WITH CONVECTION ROAST / CONVECTION BAKE
STEAM PROOF	YES (SM)

STEAM PROPERTIES	
ТУРЕ	REAL STEAM
WATER TANK SIZE	1.5L
WATER TANK LOCATION	SMALL CAVITY (TOP FRONT)
WATER TANK MATERIAL	PLASTIC
WATER TANK TYPE	MANUAL
TECHNICAL DETAILS	
CIRCUIT BREAKER (A)	50
VOLTS (V)	240 / 208
FREQUENCY (HZ)	60
ENERGY SOURCE	GAS AND ELECTRIC
GAS TYPE	NATURAL GAS NATURAL GAS (HIGH ALTITUDE) LIQUID PROPANE LIQUID PROPANE (HIGH ALTITUDE)
DIMENSIONS & WEIGHT	
APPLIANCE DIMENSIONS (H X W X D) (IN.)	36 1/8" X 47 7/8" X 27 1/2"
REQUIRED CUTOUT SIZE (W X D) (IN.)	48" X 24"
WARRANTY	


2 YEARS

LIMITED, PARTS AND LABOR



48-INCH 6-BURNER DUAL-FUEL STEAM RANGE


APPLIANCE DIMENSIONS





48"	
A (WIDTH)	47 7/8" (121.6CM)
B (DEPTH)	271/2" (69.9CM)
C (HEIGHT)	36 1/8" (91.8CM)

INSTALLATION CUTOUT DIMENSIONS

48"	
А	54" (137.2CM)* 48" (121.9CM)**
В	48" (121.9CM)** 48 1/8" (122.2CM)***
С	43 1/2" (110.5CM)

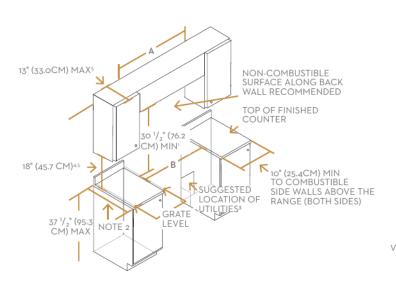





^{*}Recommended

^{**}Minimum

^{***}Maximum