




















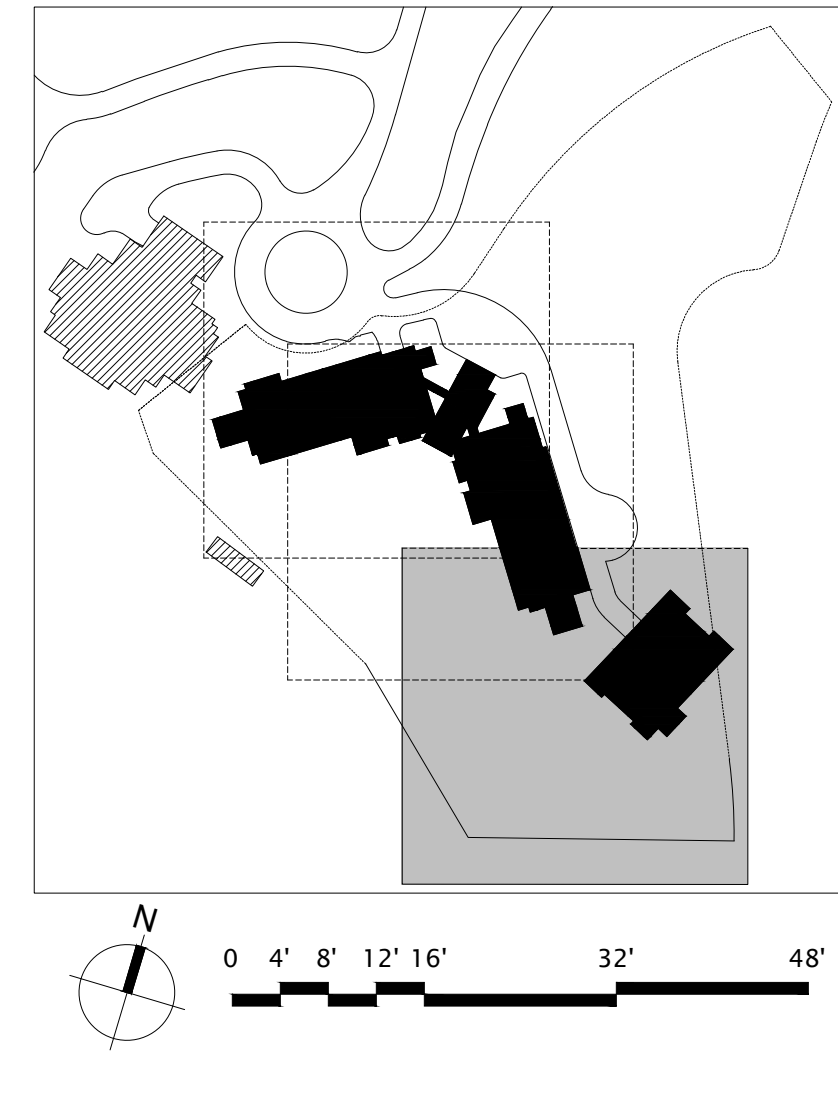


IRRIGATION SCHEDULE

SYMBOL	MANUFACTURER/MODEL/DESCRIPTION
	RAIN BIRD R1-RVANI1 RD-04-SAM-P45-N TURF ROTARY, 13-14 45-270 DEGREES AND 360 DEGREES HAND ADJUSTABLE
	RAIN BIRD R1-RVANI18 RD-04-SAM-P45-N TURF ROTARY, 13-18 45-270 DEGREES AND 360 DEGREES HAND ADJUSTABLE
	RAIN BIRD R1-RVANI24 RD-04-SAM-P45-N TURF ROTARY, 17-24 45-270 DEGREES AND 360 DEGREES HAND ADJUSTABLE
	RAIN BIRD R1-RVNI5-M-B-C-P W/ RIMS-SCOUT 1401 MINI ROTARY WATERING SYSTEM WITH 1/2" DIAMETER X 18" LONG WITH LOCKING GEAR, SEMI-RIGID MESH TUBE AND RAIN BIRD 1401 0.25 GPM GWR BUBBLER AS INDICATED WITH CHECK VALVE, PURPLE GEAR, AND SAND SACK FOR SANDY SOIL.
SYMBOL	MANUFACTURER/MODEL/DESCRIPTION
	REMOTE CONTROL RPD VALVE RAINBIRD 100D NPT W/ 30PSI PRESSURE REGULATOR AND 30 MESH WYE STRAINER
	PVC TO POLY TUBING TEE: TRANSITION POINT FROM PVC LATERAL TO DRIP TUBING
	RAIN BIRD RPDV500 1/2" AIR RELIEF VALVE, MADE OF QUALITY RUST PROOF MATERIALS, WITH A 6\" DRIP VALVE BOX (SEE 7X8 EMITTER BOX). USE WITH INSTALLATION BELOW SOIL. INSTALL AT HIGH POINTS IN DRIP LINE SYSTEM
	TREE TRIAPPER TREE TRIAPPER TD4MR, ROUND SHAPE, MODEL # 1048VA
	AREA TO RECEIVE DRIFT EMITTERS BOWSMITH SB SERIES SINGLE OUTLET DRIP EMITTER, BARBED INLET AND OUTLET, GREEN-0.6GPH.
	Emitter End SB-06 0.6gph emitters (2 assigned to each 1 Gal plant) SB-06 0.6gph emitters (2 assigned to each 5 Gal plant)
SYMBOL	MANUFACTURER/MODEL/DESCRIPTION
	RAIN BIRD PESS-PPS-0 1\" PLASTIC INJECTION VALVES, LOW FLOW OPERATING CAPABILITY, GLOBE CONFIGURATION, WITH PRESSURE REGULATING MODULE, AND SCRUBBER TECHNOLOGY FOR RELIABLE PERFORMANCE IN DIRTY WATER IRRIGATION APPLICATIONS.
	RAIN BIRD 44-LRC 1\" BRASS GLOBE-COUPLING VALVE, WITH CORROSION-RESISTANT STAINLESS STEEL SPRING, LOCKING THERMOPLASTIC RUBBER COVER, AND 2-PIECE BODY.
	RAIN BIRD EFP-C 1\" 1\", 1-1/4\", 1-1/2\", 2\" BRASS MASTER VALVE, THAT IS CONTAMINATION PROOF W/ SELF-FLUSHING FILTER SCREEN, GLOBE CONFIGURATION, RECLAIMED MATERIAL COMPATIBLE, AND PURPLE HANDLE COVER DESIGNATES NON-POTABLE WATER USE.
	ZURN WILKINS 375X1P REDUCED PRESSURE PRINCIPLE ASSEMBLY, SIZE PER PLAN SEE ARCHITECTURE MECHANICAL PLANS FOR FINAL LOCATION AND DETAIL.
	HYDRO PRO WEATHER TRACK LC-18 STATION 2WIRE INSTALL CONTROLLER IN UTILITY ROOM OR SEE ARCHITECTURE PLANS FOR LOCATION
	HYDRO PRO WTLFOWHD-1200T IRON, HIGH DEFINITION FLOW SENSOR AND SUB-METER FOR 2\" MAINLINES. INSTALL ON DOWNSTREAM SIDE OF BACKFLOW PREVENTER ABOVE GRADE PER DETAIL.
	POINT OF CONNECTION WATER METER FOR IRRIGATION SEE CIVIL PLANS
	IRRIGATION LATERAL LINE, PVC SCHEDULE 40
	IRRIGATION MAINLINE, PVC SCHEDULE 40
	Valve Cabinet
	Valve Size



DISCLAIMER:

THE DESIGNS SHOWN AND DESCRIBED HEREIN INCLUDING ALL TECHNICAL DRAWINGS, GRAPHIC REPRESENTATIONS, AND MODELS THEREOF ARE PROPRIETARY AND CAN NOT BE COPIED, DUPLICATED, OR COMMERCIALY EXPLOITED IN WHOLE OR IN PART WITHOUT THE SOLE AND EXPRESS WRITTEN PERMISSION FROM ENVIRONMENTAL PLANNING GROUP (EPG).

ENVIRONMENTAL PLANNING GROUP (EPG) PROVIDED QUANTITIES ARE CALCULATED BASED ON THE 3D MODEL PROGRESS. CONTRACTORS ARE RESPONSIBLE FOR REVIEWING THE DESIGN AND PROVIDING THEIR OWN CALCULATIONS AND AREAS FOR THE PURPOSES OF COST ESTIMATING / BIDDING.

THE CLIENT, AND/OR THE CLIENT'S CONTRACTOR, IS RESPONSIBLE FOR ATTAINING OR PROVIDING THE NECESSARY CONSTRUCTION PERMIT FOR CITY CODE COMPLIANCE.