


PLAN GENERAL NOTES

2. DIMENSIONS ARE TO FACE OF STUD OF EXTERIOR WALLS, CORRIDOR WALLS & INTERIOR WALLS. UNO
3. DIMENSIONS ARE TO CENTERLINE OF DEMISING WALLS. UNO
4. ALL EXPOSED STRUCTURAL STEEL TO RECEIVE 1 HR INTERFERENCE PAINTING. UNO
5. AT FRAMED EXTERIOR WALLS TO RECEIVE 1/2" MIN. THICKNESS OF CONCRETE TO ALLOW FOR FLUSH ALIGNMENT OF SHEATHING TO EDGE OF SLAB. UNO
6. CASEWORK DIMENSIONS ARE TO FACE OF FINISH. UNO
7. SEE SHEETS 40.10 AND 40.11 FOR ASSEMBLIES.
8. ALL CORRIDOR WALLS ARE TYPE E6. UNO
8. ALL DEMISING WALLS ARE TYPE J6. UNO
8. ALL INTERIOR PARTITIONS ARE TYPE A6. UNO
9. ALL FURRING AROUND CONCRETE STRUCTURAL COLUMNS TYPE G1. UNO
10. ALL INTERIOR SHAFT WALLS ARE TYPE K4. UNO
11. REFER TO LIFE SAFETY PLANS A301-A304 FOR FULL EXTENT OF FIRE RATED WALLS.
13. UNIT PLAN LAYOUTS ON SHEETS A2-A4, A2-A4
14. ALL OWNER PARKING STALLS TO RECEIVE CURB AND INFRASTRUCTURE.
15. REFER TO SHEET A0.08 FOR ANSI TYPE 8 ACCESSIBILITY REQUIREMENTS.
16. REFER TO SHEET A0.07 FOR ANSI TYPE 4 ACCESSIBILITY REQUIREMENTS.
17. REFER TO SHEET A0.06 FOR ANSI TYPE 3 ACCESSIBILITY REQUIREMENTS.
18. ALL MECHANICAL EQUIPMENT LOCATED WITHIN ELEVATOR/MECHANICAL EQUIPMENT ENCLOSURE.



1 TOWER A - LEVEL 6
SCALE: 1/8" = 1'-0"

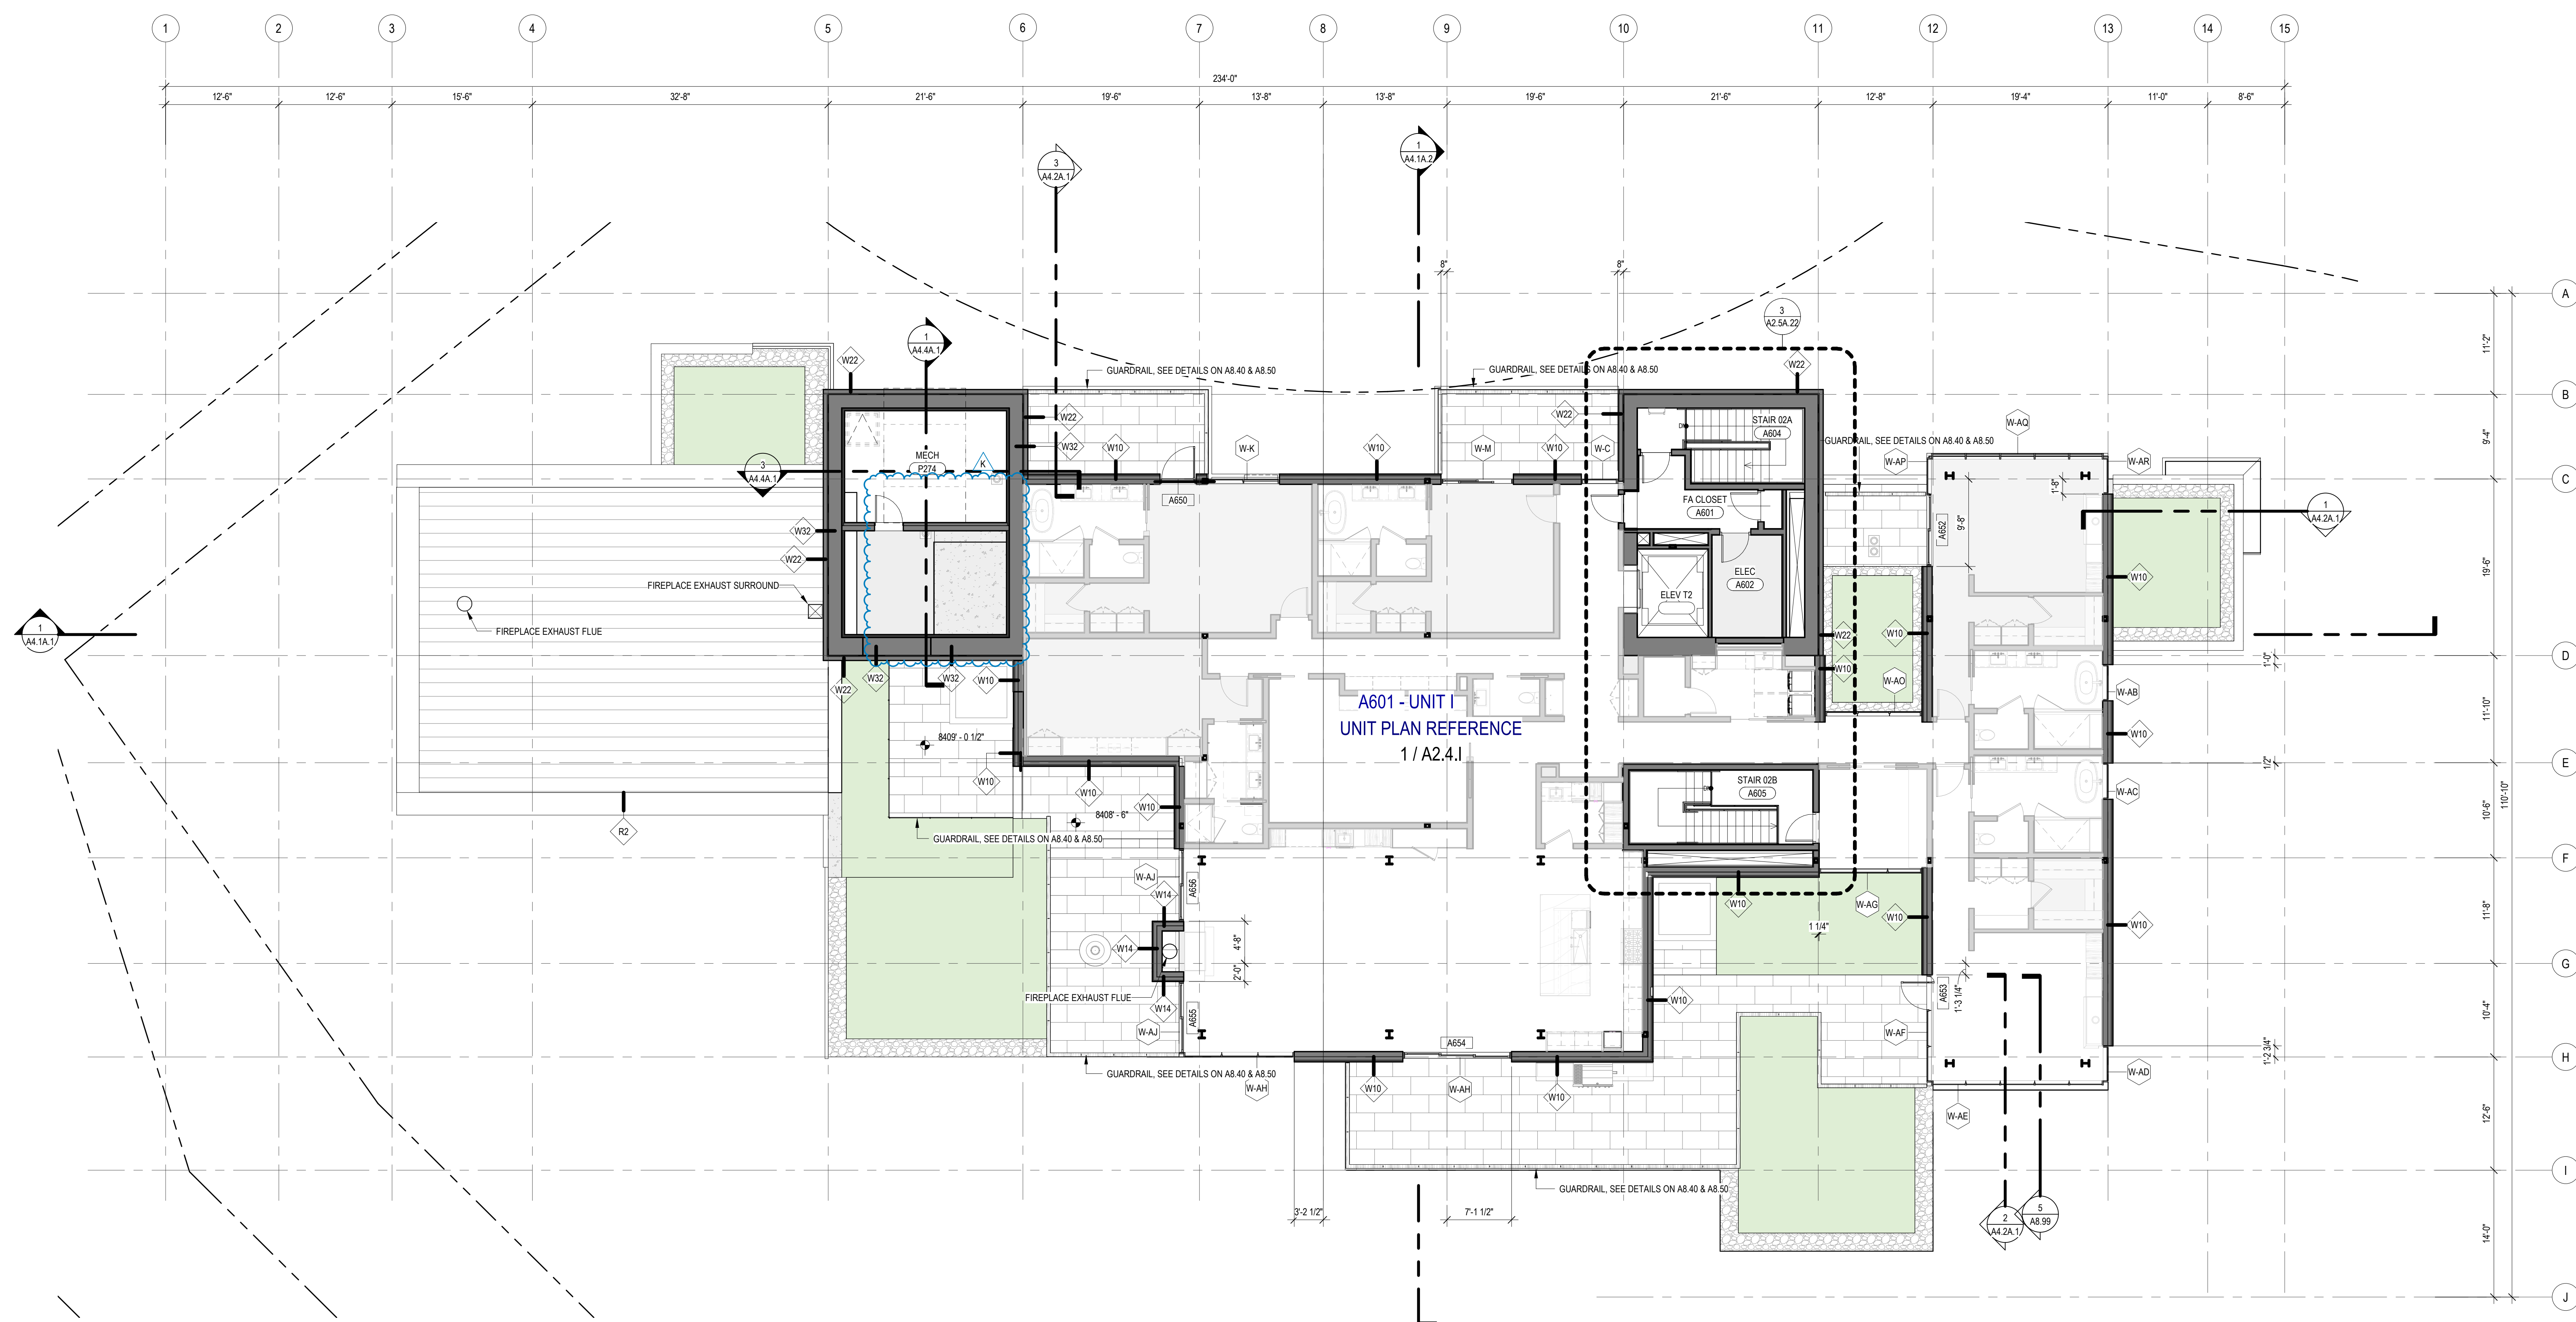