

## 16 ABBREVIATIONS

## 7 BEAM CALLOUT KEY

## 12 CONNECTORS

## 17 CONCRETE SCHEDULE MARKS



## DRAWING LIST


S5.00	TOWER A & B CONCRETE SECTIONS AND DETAILS
S5.01	TOWER A & B CONCRETE SECTIONS AND DETAILS
S5.02	TOWER A & B CONCRETE SECTIONS AND DETAILS
S5.05	TOWER C CONCRETE SECTIONS AND DETAILS
S5.06	TOWER C CONCRETE SECTIONS AND DETAILS

[illegible]







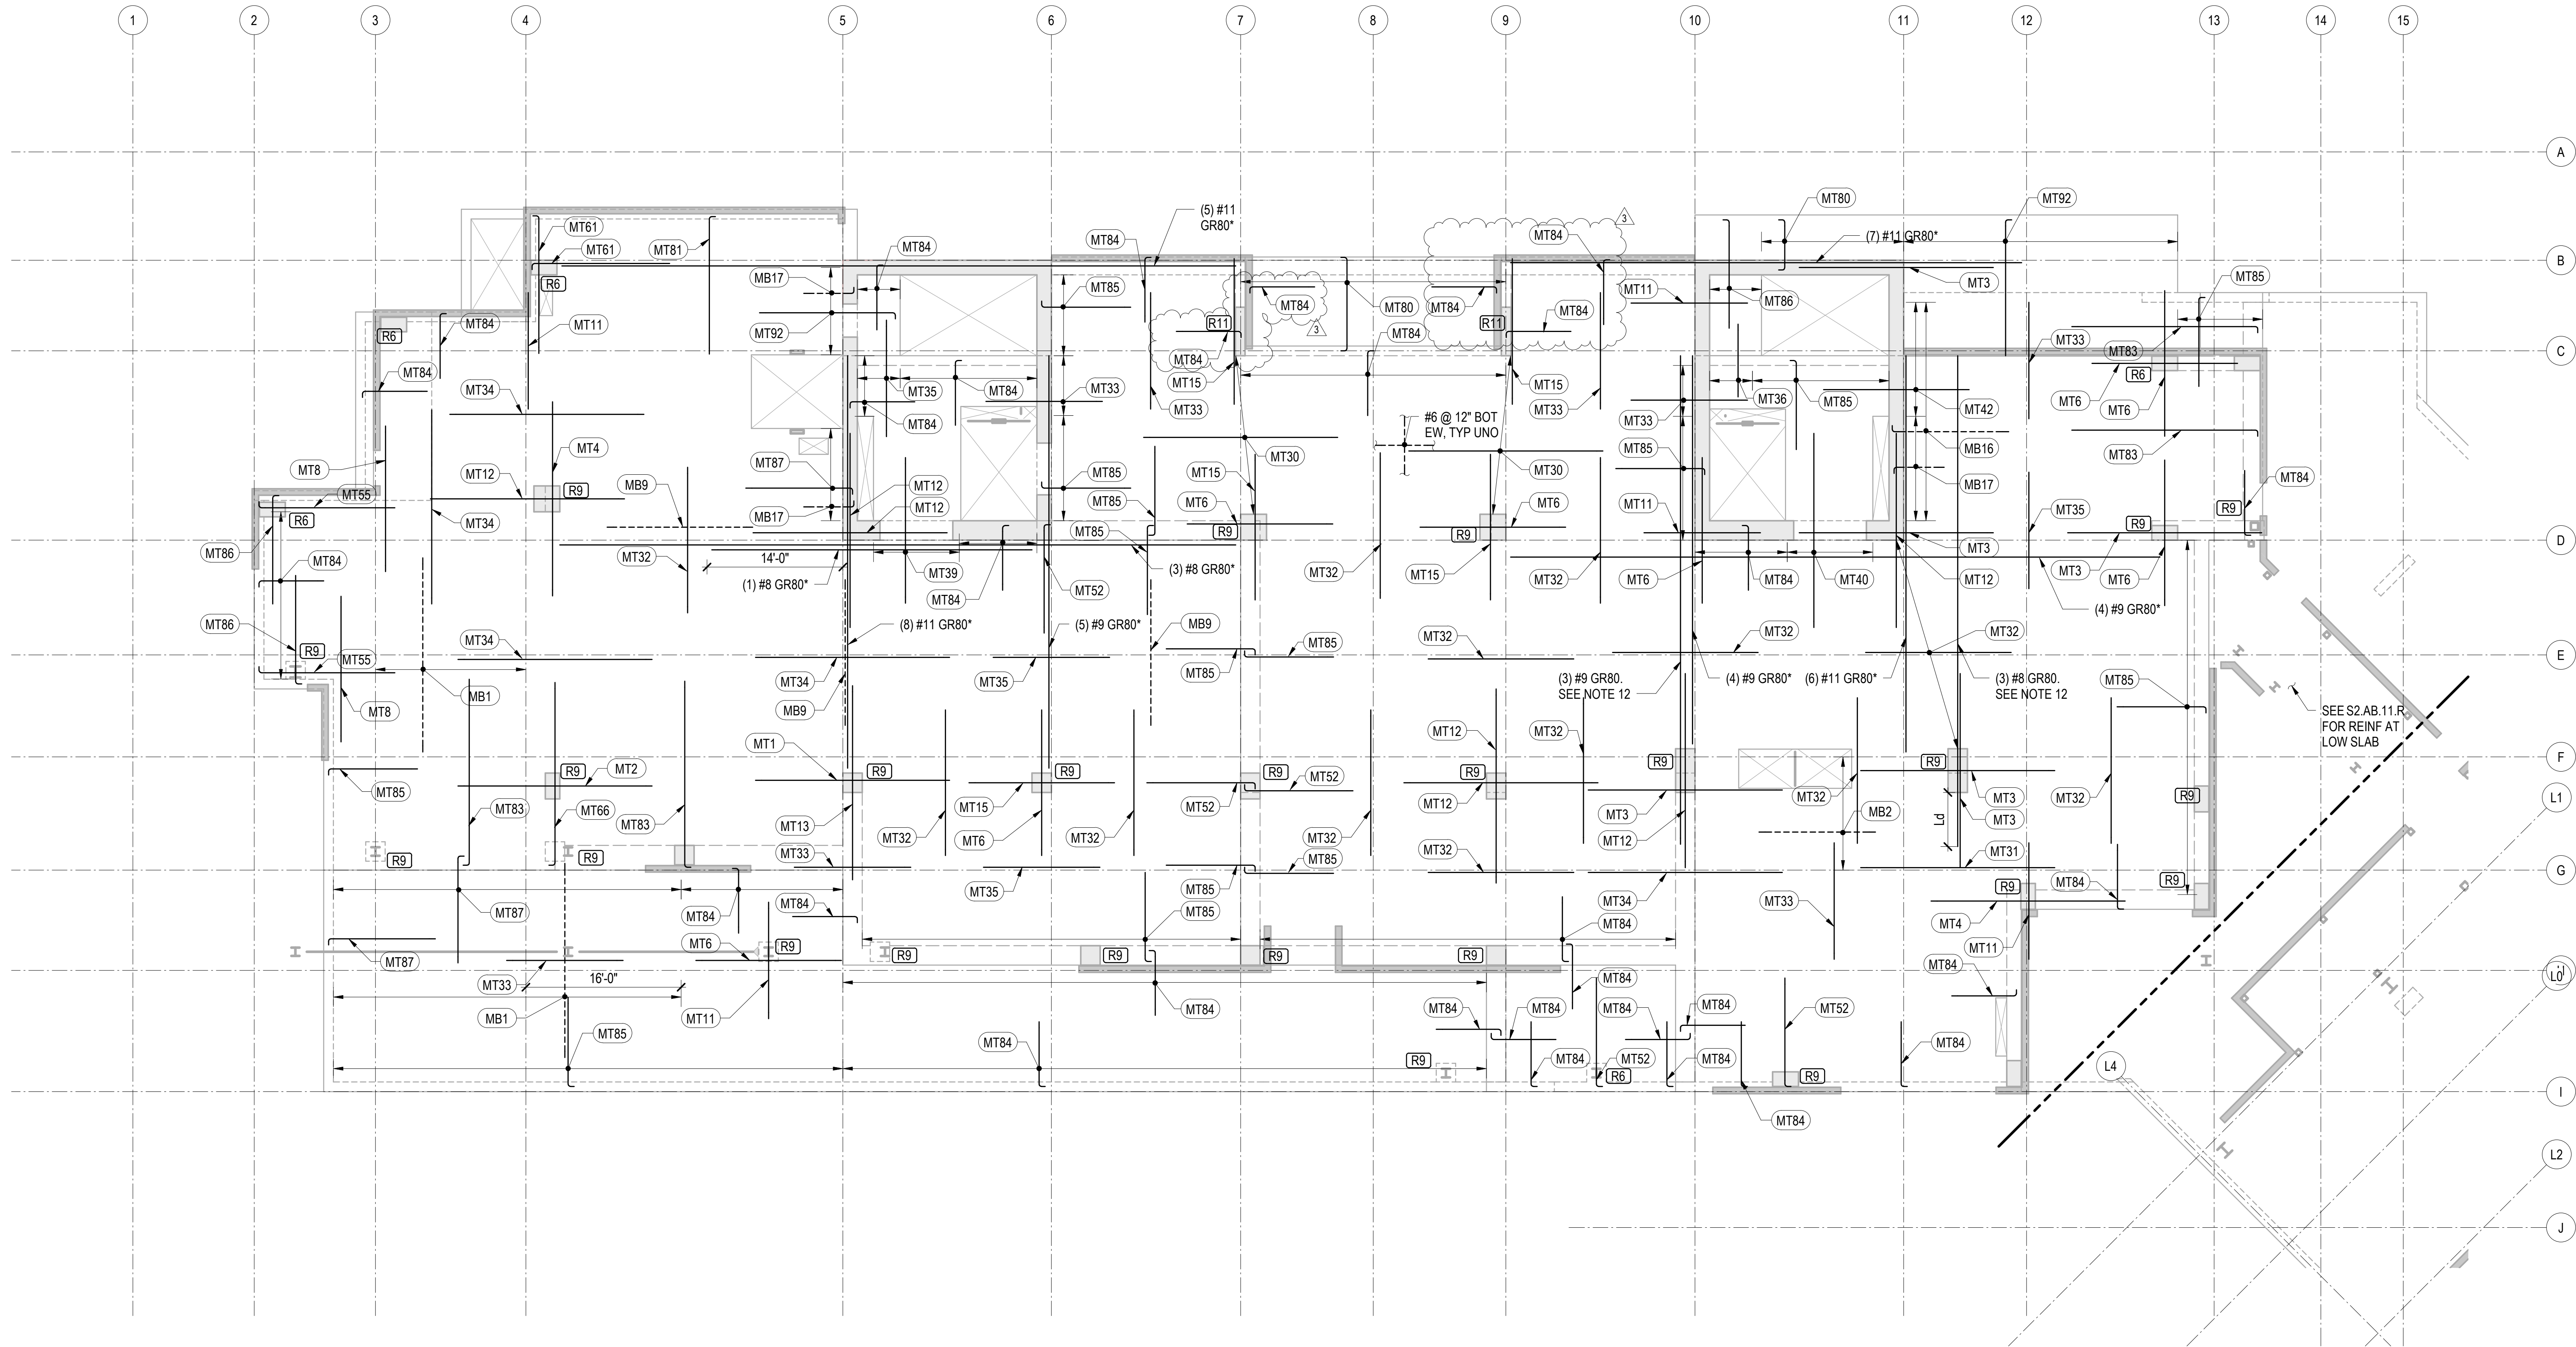

1 TOWER A - LEVEL 1 - REINFORCEMENT PLAN  
1/8" = 1'-0"

REINFORCING NOTES:

- SEE "GENERAL NOTES" FOR REINFORCING REQUIREMENTS.
- SEE "TYPICAL MILD SLAB DETAILS" FOR ADDITIONAL INFORMATION.
- SLAB REINFORCING SHALL BE PLACED IN THE FOLLOWING SEQUENCE:  
E-W BOTTOM BARS  
N-S BOTTOM BARS  
N-S TOP BARS  
E-W TOP BARS
- FOR CONTINUOUS BOTTOM BARS, LAP BARS Lsb AS REQUIRED WITH LAPS AT 1/3 THE SLAB SPAN BETWEEN ADJACENT COLUMNS.
- TWO OF THE CONTINUOUS BOTTOM BARS ARE TO BE PLACED EACH WAY THROUGH ALL COLUMNS WITH COLUMN VERTICAL REINFORCEMENT, UNLESS NOTED OTHERWISE.
- BOTTOM BARS CALLED OUT ARE IN ADDITION TO CONTINUOUS BOTTOM MAT.
- [RX] INDICATES STUD RAIL. STUD RAILS SHALL BE PLACED AT ALL COLUMNS. SEE "TYPICAL STUD RAIL REINFORCEMENT AT COLUMNS" DETAIL AND STUD RAIL SCHEDULE.
- SEE "TYPICAL CONCRETE OPENINGS AND EMBEDMENTS" FOR ADDITIONAL REINFORCEMENT REQUIREMENTS. NOTIFY STRUCTURAL ENGINEER OF ANY OPENINGS NOT SHOWN ON THE STRUCTURAL DRAWINGS FOR WHICH THE TYPICAL DETAILS DO NOT APPLY. ADDITIONAL REINFORCEMENT MAY BE REQUIRED.
- WHERE BAR LENGTH CANNOT BE ACHIEVED DUE TO SLAB EDGE, HOOK BAR.
- WHERE NOTED AS "HOOKED", PROVIDE 90 OR 180 DEGREE HOOK AS SHOWN ON PLAN. NOTED BAR LENGTH IS LENGTH OF STRAIGHT PORTION OF BAR.
- \* INDICATES DIAPHRAGM REINFORCEMENT THAT IS PART OF THE LATERAL FORCE RESISTING SYSTEM AND IS IN ADDITION TO OTHER BARS SHOWN. THIS REINFORCEMENT SHALL BE CENTERED IN SLAB MID-DEPTH, UNO. REINFORCEMENT SHALL MEET CENTER-TO-CENTER SPACING OF 3db BUT NOT LESS THAN 3-INCHES, UNLESS NOTED OTHERWISE. LAP Lsb AS REQUIRED, STAGGER LAPS.

12. WHERE NOTE APPLIES, REINFORCEMENT IS DIAPHRAGM REINFORCEMENT THAT IS PART OF THE LATERAL FORCE RESISTING SYSTEM AND IN ADDITION TO OTHER BARS SHOWN. REINFORCEMENT IS TO BE PLACED WITHIN VERTICALS OF COLUMNS AT GRIDS 10/F OR 11.4/F. REINFORCEMENT SHALL BE CENTERED IN SLAB MID-DEPTH. REINFORCEMENT SHALL MEET CENTER-TO-CENTER SPACING OF 3db BUT NOT LESS THAN 3-INCHES, UNLESS NOTED OTHERWISE. LAP SPLICE IS NOT PERMITTED, PROVIDE MECHANICAL COUPLER IF NECESSARY.



MILD TOP REINFORCEMENT SCHEDULE		
MARK	REINFORCING	REMARKS
MT1	(13) #6x20'-0" @ 10"	STAGGER 6'-0"
MT2	(13) #7x20'-0" @ 10"	STAGGER 5'-0"
MT3	(11) #7x20'-0" @ 12"	STAGGER 4'-0"
MT4	(11) #6x20'-0" @ 12"	STAGGER 4'-0"
MT5	(13) #5x15'-0" @ 10"	STAGGER 4'-0"
MT6	(11) #6x15'-0" @ 12"	STAGGER 4'-0"
MT7	(15) #7x15'-0" @ 9"	STAGGER 3'-0"
MT8	(6) #5x15'-0" @ 12"	STAGGER 3'-0"
MT9	(6) #7x15'-0" @ 12"	STAGGER 3'-0"
MT11	(11) #5x12'-0" @ 12"	STAGGER 2'-0"
MT12	(16) #8x20'-0" @ 8"	STAGGER 5'-0"
MT13	(21) #8x20'-0" @ 6"	STAGGER 5'-0"
MT14	(21) #7x20'-0" @ 6"	STAGGER 5'-0"
MT15	(11) #5x15'-0" @ 12"	STAGGER 3'-0"
MT16	(11) #4x12'-0" @ 12"	STAGGER 2'-0"

MILD TOP REINFORCEMENT SCHEDULE		
MARK	REINFORCING	REMARKS
MT17	(11) #4x15'-0" @ 12"	STAGGER 3'-0"
MT18	(16) #8x20'-0" @ 8"	STAGGER 5'-0"
MT30	#5x20'-0" @ 12"	STAGGER 3'-0"
MT31	#5x20'-0" @ 10"	STAGGER 2'-0"
MT32	#5x15'-0" @ 12"	STAGGER 2'-0"
MT33	#5x12'-0" @ 12"	STAGGER 2'-0"
MT34	#5x20'-0" @ 12"	STAGGER 4'-0"
MT35	#5x12'-0" @ 12"	STAGGER 1'-0"
MT36	#5x7'-6" @ 12"	STAGGER 0'-0"
MT37	#4x12'-0" @ 12"	STAGGER 1'-0"
MT38	#4x15'-0" @ 12"	STAGGER 1'-0"
MT39	#5x15'-0" @ 8"	STAGGER 2'-0"
MT40	#6x20'-0" @ 12"	STAGGER 4'-0"
MT42	#6x15'-0" @ 12"	STAGGER 2'-0"
MT43	#7x15'-0" @ 6"	STAGGER 3'-0"

MILD TOP REINFORCEMENT SCHEDULE		
MARK	REINFORCING	REMARKS
MT50	(6) #5x24'-2" @ 12"	HOOK AT END
MT51	(11) #5x6'-8" @ 12"	HOOK AT END
MT52	(11) #5x11'-2" @ 12"	HOOK AT END
MT53	(7) #6x11'-0" @ 12"	HOOK AT END
MT54	(11) #5x14'-2" @ 12"	HOOK AT END
MT55	(16) #6x14'-0" @ 8"	HOOK AT END
MT56	(6) #5x14'-2" @ 12"	HOOK AT END
MT57	(6) #6x9'-0" @ 12"	HOOK AT END
MT58	(11) #6x14'-0" @ 12"	HOOK AT END
MT60	(16) #7x10'-10" @ 8"	HOOK AT END
MT61	(11) #5x14'-2" @ 12"	HOOK AT END
MT62	(11) #4x11'-4" @ 12"	HOOK AT END
MT63	(11) #4x14'-4" @ 12"	HOOK AT END
MT64	(11) #4x19'-4" @ 12"	HOOK AT END

MILD TOP REINFORCEMENT SCHEDULE		
MARK	REINFORCING	REMARKS
MT65	(11) #4x6'-10" @ 12"	HOOK AT END
MT66	(16) #7x18'-10" @ 8"	HOOK AT END
MT80	#5 @ 12"	HOOK BOTH ENDS
MT81	#5x14'-2" @ 12"	HOOK AT END
MT82	#6x29'-0" @ 12"	HOOK AT END
MT83	#5x19'-2" @ 12"	HOOK AT END
MT84	#5x6'-8" @ 12"	HOOK AT END
MT85	#5x9'-2" @ 12"	HOOK AT END
MT86	#5x11'-2" @ 12"	HOOK AT END
MT87	#6x11'-0" @ 12"	HOOK AT END
MT88	#4x14'-4" @ 12"	HOOK AT END
MT89	#4x6'-10" @ 12"	HOOK AT END
MT90	#4 @ 12"	HOOK BOTH ENDS
MT91	#4x9'-4" @ 12"	HOOK AT END
MT92	#6x14'-0" @ 12"	HOOK AT END
MT93	#5x19'-2" @ 10"	HOOK AT END
MT97	#7x10'-10" @ 12"	HOOK AT END

MILD BOTTOM REINFORCEMENT SCHEDULE		
MARK	REINFORCING	REMARKS
MB1	#5x20'-0" @ 12"	STAGGER 2'-0"
MB2	#5x12'-0" @ 24"	STAGGER 2'-0"
MB4	(3) #5x12'-0" @ 14"	STAGGER 2'-0"
MB5	#5x20'-0" @ 18"	STAGGER 2'-0"
MB6	#5x20'-0" @ 16"	STAGGER 2'-0"
MB7	(6) #5x15'-0" @ 16"	STAGGER 2'-0"
MB8	(11) #5x20'-0" @ 12"	STAGGER 3'-0"
MB9	(3) #5x15'-0" @ 24"	STAGGER 2'-0"
MB15	(6) #5x30'-0" @ 24"	STAGGER 3'-0"
MB16	(11) #4x12'-0" @ 12"	STAGGER 3'-0"
MB17	#6x5'-2" @ 24"	HOOK AT END

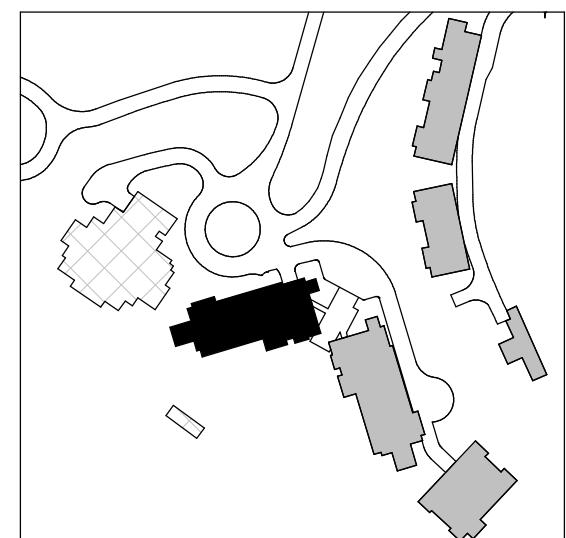

Reserved for permit stamp

150 South Jackson St., Suite 800  
Seattle, Washington 98104 USA  
+1 206 624 8870 olsonkundig.com

Olson Kundig

PROJECT  
SOMMET BLANC - ABC  
DEER VALLEY, UTAH

MAGNUSSON  
KLEMENCIC  
ASSOCIATES

Structural + Civil Engineers  
Seattle Chicago  
www.mka.com  
206 292 1200

principal architect \_\_\_\_\_  
project manager \_\_\_\_\_  
drawn by \_\_\_\_\_  
checked by \_\_\_\_\_  
job no. 20052  
date 05/17/2024  
revisions: \_\_\_\_\_

3 8/19/2024 AS-004  
04/08/2024 IFC SET 1 OF 3  
11/18/2022 95% CD  
no. date by

IFC SET 2 OF 3

05/17/2024


TOWER A LEVEL 1  
REINFORCING  
PLAN

S2.A.11.R



S2.A.12





Seattle, Washington 98104 USA  
+1 206 624 5670 [olsonkundig.com](mailto:olsonkundig.com)

**SOMMET BLANC - ABC**  
DEER VALLEY, UTAH


## Structural + Civil Engineers

Little Chicago  
www.miko.com  
06 292 1200

$$1/8^{\circ} = 1^{\circ} - 0^{\circ}$$

8. PROVIDE INTEGRITY BOTTOM BARS PER STUD RAIL SCHEDULE AT ALL COLUMNS. CENTER REINFORCEMENT ON COLUMNS AND PLACE INTEGRITY BARS EACH WAY WITHIN COLUMN VERTICAL REINFORCEMENT. TRIM AND HOOK AT SLAB EDGE AS REQUIRED.

PT TOP REINFORCEMENT SCHEDULE		
MARK	REINFORCING	REMARKS
PT50	(3) #5x5'-2"	HOOK AT END
PT51	(6) #5x6'-8"	HOOK AT END
PT52	(10) #5x9'-2"	HOOK AT END
PT53	(8) #5x6'-8"	HOOK AT END
PT54	(6) #5x14'-2"	HOOK AT END
PT55	(8) #5x14'-2"	HOOK AT END
PT56	(16) #5x11'-2"	HOOK AT END
PT57	(16) #5x14'-2"	HOOK AT END
PT58	(12) #5x6'-8" @ 12"	HOOK AT END
PT59	(14) #5x11'-2" @ 12"	HOOK AT END
PT60	#5x11'-2" @ 10"	HOOK AT END
T781	#5x6'-8" @ 10"	HOOK AT END
T782	#6x9'-0" @ 6"	HOOK AT END
T783	#6x9'-0" @ 4"	HOOK AT END
T784	#6x19'-2" @ 12"	HOOK AT END
T785	#5x14'-2" @ 12"	HOOK AT END



05/17/2024

TOWER A LEVEL 2  
REINFORCING  
PLAN


S2.A.12.R






S0.XX	DRAWING INDEX, ABBREVIATIONS, LEGENDS, GENERAL NOTES
S1.XX	LOAD DIAGRAMS
S2.XX	PLANS
S3.XX	ELEVATIONS
S4.XX	TYPICAL DETAILS AND SCHEDULES
S5.XX	CONCRETE SECTIONS AND DETAILS
S6.XX	STEEL SECTIONS AND DETAILS

1. REFERENCE FLOOR ELEVATION IS 837'1" - 0". TOP OF STRUCTURAL CONCRETE SLAB IS 837'0" - 11" UNLESS NOTED OTHERWISE. SEE ARCHITECTURAL DRAWINGS FOR DRAINAGE SLOPES NOT SHOWN.
2. STRUCTURAL SLAB IS AN 8-INCH THICK UNBONDED POST-TENSIONED TWO-WAY SLAB UNLESS NOTED OTHERWISE. SEE TYPICAL POST-TENSIONED SLAB DETAILS FOR ADDITIONAL INFORMATION.
3. THE MINIMUM NUMBER OF REQUIRED POST-TENSIONING TENDONS IS SHOWN ON THE DRAWINGS. FINAL COUNT, LAYOUT, AND LIVE END LOCATION IS PER DEFERRED DESIGN-BUILD SUBMITTAL PROVIDED BY THE CONTRACTOR.
4. CONCRETE PLACED IN THE SLAB/SHEAR WALL INTERSECTION, INCLUDING COUPLING BEAMS, SHALL HAVE MINIMUM CONCRETE STRENGTH EQUAL TO THAT SPECIFIED FOR THE SHEAR WALLS.
5. CONCRETE PLACED IN THE SLAB/COLUMN INTERSECTION SHALL HAVE MINIMUM CONCRETE STRENGTH AS SHOWN IN THE GENERAL NOTES, BUT NO LESS THAN THAT SPECIFIED FOR THE COLUMNS DIVIDED BY 1.4.
6. COORDINATE LOCATION OF ALL EMBEDS WITH MECHANICAL, ELECTRICAL, PLUMBING, AND EXTERIOR WALL SYSTEMS PRIOR TO CASTING THE SLAB.

7. SEE ARCHITECTURAL, MECHANICAL, PLUMBING, ELECTRICAL, AND OTHER DISCIPLINES DRAWINGS FOR OPENING SIZES AND LOCATIONS NOT SHOWN ON PLAN. SEE "TYPICAL OPENINGS AND EMBEDMENTS IN CONCRETE" DETAILS FOR OPENING PLACEMENT CRITERIA. NOTIFY THE STRUCTURAL ENGINEER OF ANY OPENINGS NOT SHOWN ON THE STRUCTURAL DRAWINGS FOR WHICH THE TYPICAL DETAILS DO NOT APPLY.
8. REFERENCE ALL CONSTRUCTION DOCUMENTS FOR SIZE, EXTENT, AND LOCATION OF CONCRETE CURBS, HOUSEKEEPING PADS, CMU WALLS, PLANTER WALLS, BOLLARDS, AND EDGE ANGLES. REINFORCE PER THE TYPICAL DETAILS.
9.  INDICATES FOUR STRIPS, WAIT 28 DAYS MINIMUM AFTER PLACING SLAB CONCRETE PRIOR TO CASTING FOUR STRIPS. SEE "TYPICAL POST-TENSIONED DELAY STRIP" DETAIL FOR MORE INFORMATION.



Reserved for permit stamp

159 South Jackson St, Suite 800  
Seattle, Washington 98104 USA  
+1 206 624 5670 [olsonkunding.com](mailto:olsonkunding.com)

Olson Kundig

Project: **SOMMET BLANC - ABC**  
**DEER VALLEY, UTAH**

MAGNUSSON  
KLEMENCIC  
ASSOCIATES

**Structural + Civil Engineers**  
Seattle Chicago  
www.mika.com  
206.292.1200

principal architect \_\_\_\_\_  
project manager \_\_\_\_\_  
drawn by \_\_\_\_\_

checked by \_\_\_\_\_  
job no. 20052  
date 05/17/2024

revisions

5	01/07/2025	ASI-007
3	8/19/2024	ASI-004
	04/08/2024	IFC SET 1 OF 3
	11/18/2022	95% CD

IFC SET 2 OF 3

05/17/2024

TOWER A LEVEL 3  
FRAMING PLAN

S2.A.13












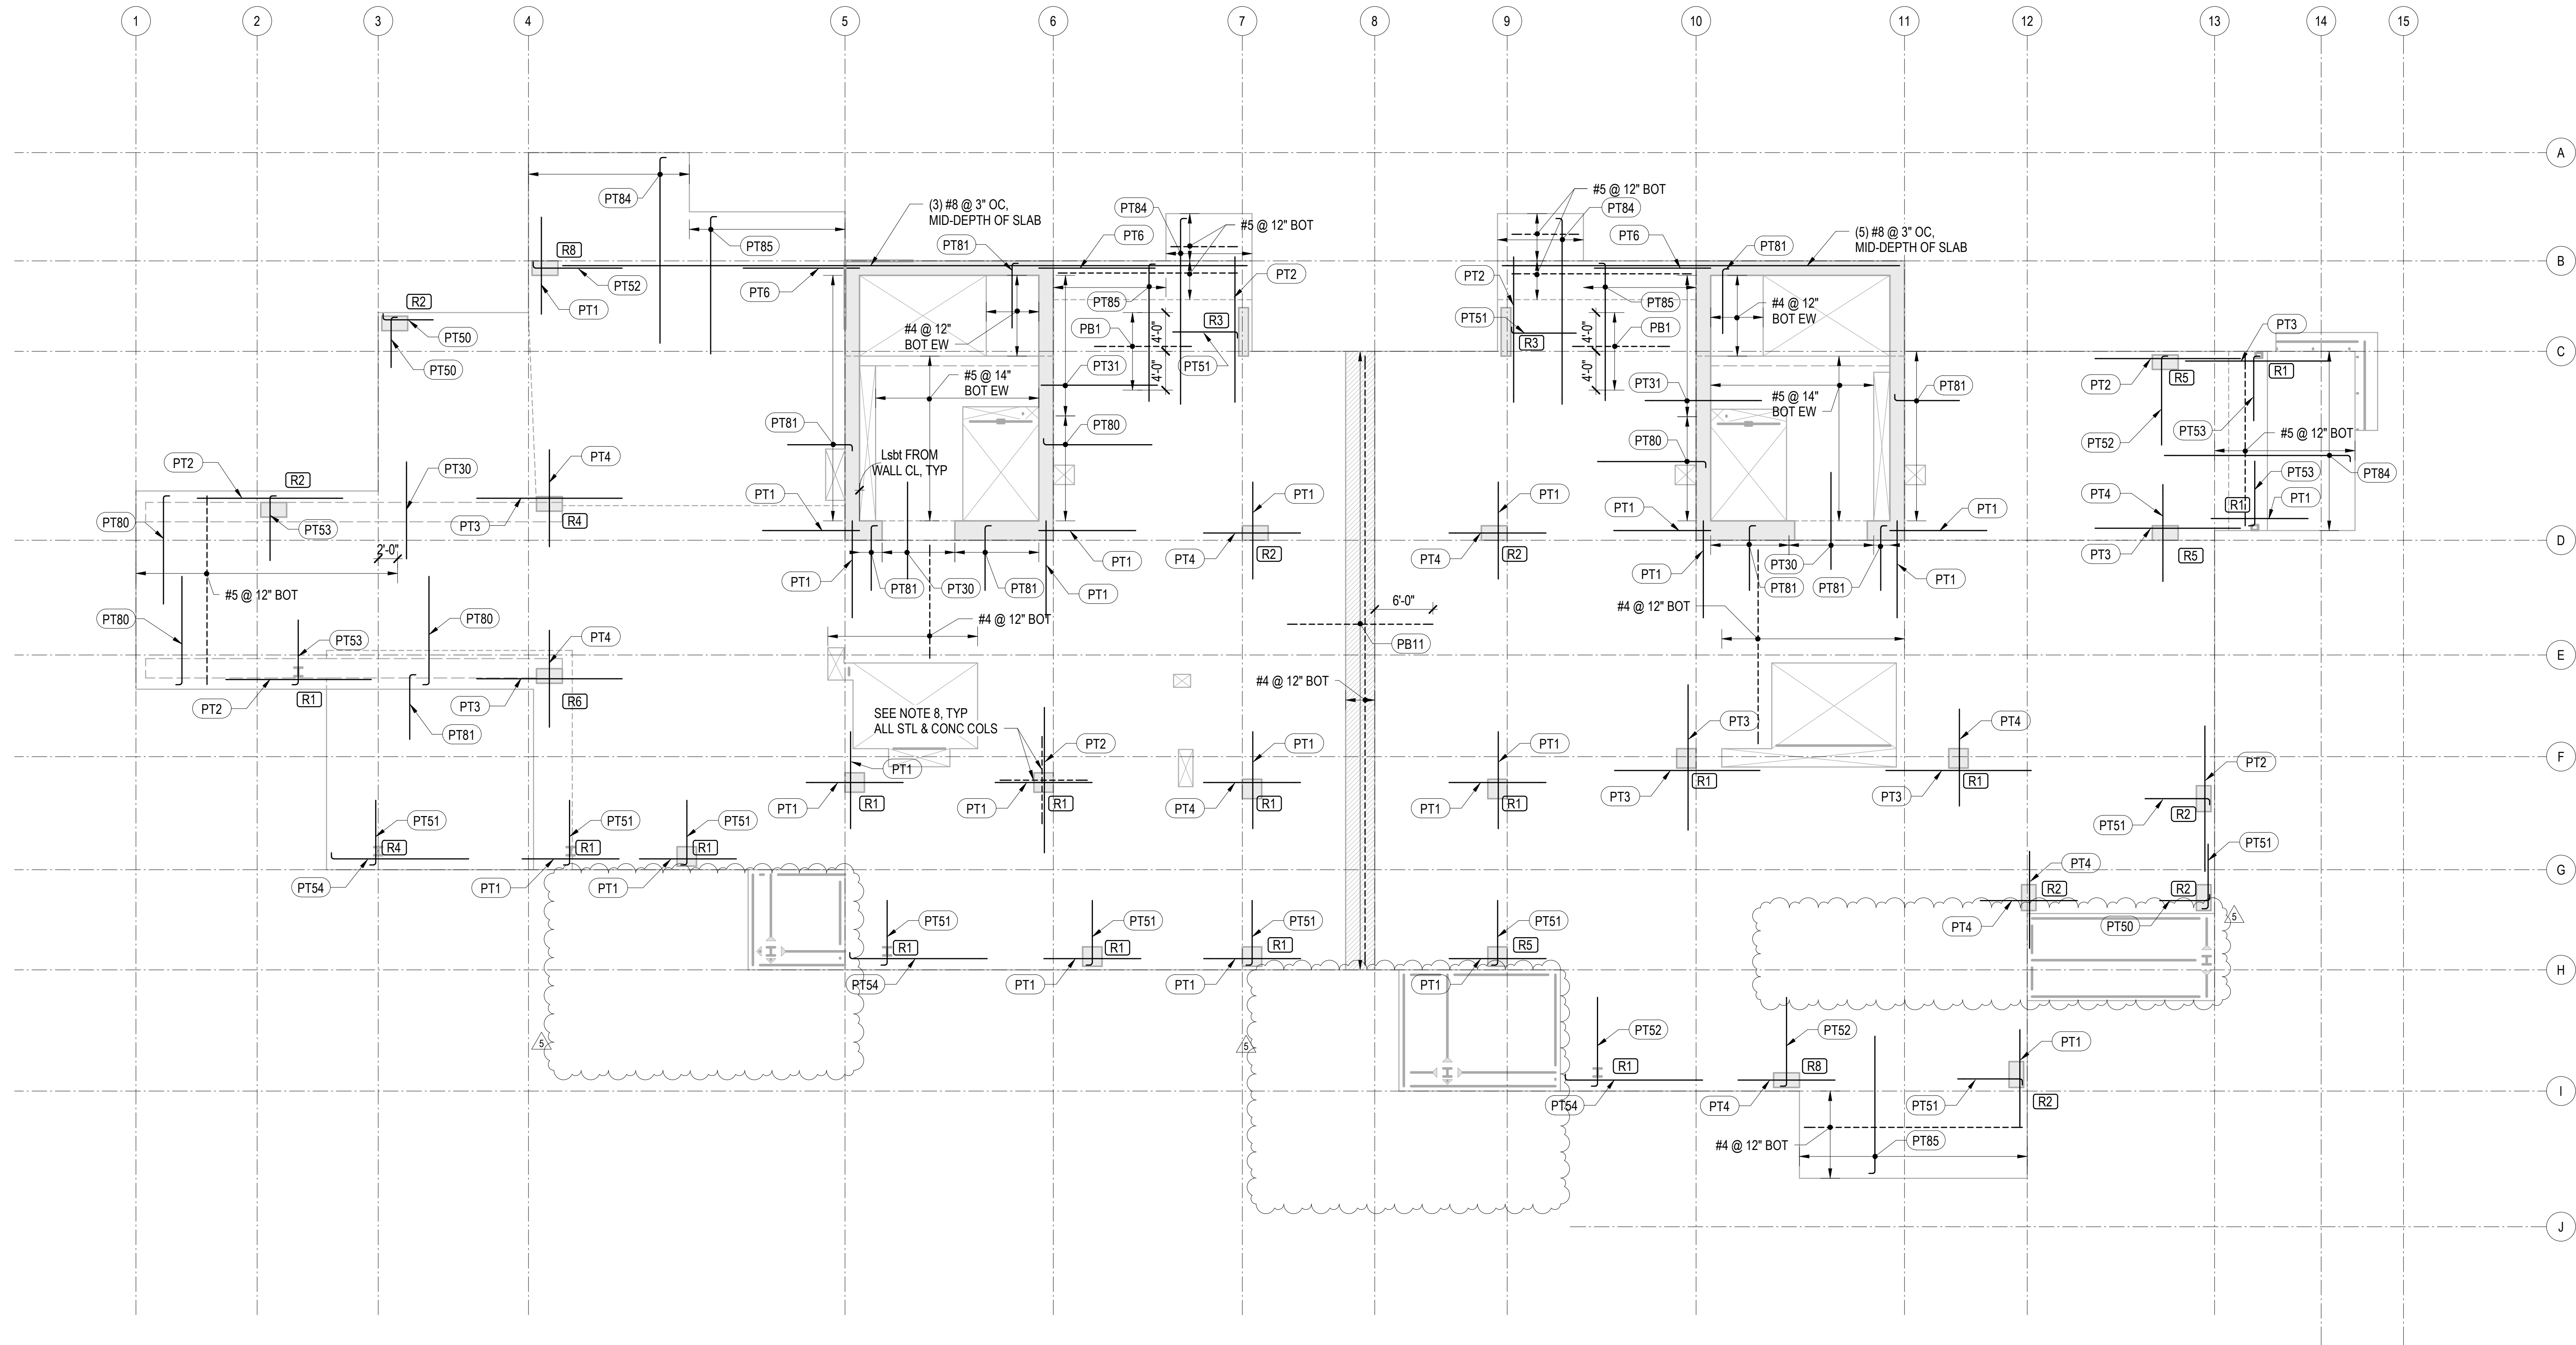

**1 TOWER A - LEVEL 4 - REINFORCEMENT PLAN**  
1/8" = 1'-0"



**REINFORCING NOTES:**

- SEE "GENERAL NOTES" FOR REINFORCING REQUIREMENTS.
- SEE "TYPICAL POST-TENSIONED SLAB DETAILS" FOR ADDITIONAL INFORMATION.
- SLAB REINFORCING SHALL BE PLACED IN THE FOLLOWING SEQUENCE:  
BOT BARS IN DIRECTION OF DISTRIBUTED TENDONS  
BOT BARS IN DIRECTION OF BANDED TENDONS  
TOP BARS IN DIRECTION OF BANDED TENDONS  
TOP BARS IN DIRECTION OF DISTRIBUTED TENDONS
- [RX]** INDICATES STUD RAIL. STUD RAILS SHALL BE PLACED AT ALL COLUMNS. SEE "TYPICAL STUD RAIL REINFORCEMENT AT COLUMNS" DETAIL AND STUD RAIL SCHEDULE.
- SEE "TYPICAL CONCRETE OPENINGS AND EMBEDMENTS" FOR ADDITIONAL REINFORCEMENT REQUIREMENTS. NOTIFY STRUCTURAL ENGINEER OF ANY OPENINGS NOT SHOWN ON THE STRUCTURAL DRAWINGS FOR WHICH THE TYPICAL DETAILS DO NOT APPLY. ADDITIONAL REINFORCEMENT MAY BE REQUIRED.
- WHERE BAR LENGTH CANNOT BE ACHIEVED DUE TO SLAB EDGE, HOOK BAR.
- WHERE NOTES AS "HOOKED", PROVIDE 90 OR 180 DEGREE HOOK AS SHOWN ON PLAN. NOTED BAR LENGTH IS LENGTH OF STRAIGHT PORTION OF BAR.
- PROVIDE INTEGRITY BOTTOM BARS PER STUD RAIL SCHEDULE AT ALL COLUMNS. CENTER REINFORCEMENT ON COLUMNS AND PLACE INTEGRITY BARS EACH WAY WITHIN COLUMN VERTICAL REINFORCEMENT. TRIM AND HOOK AT SLAB EDGE AS REQUIRED.

PT TOP REINFORCEMENT SCHEDULE		
MARK	REINFORCING	REMARKS
PT1	(6) #5x10'-0"	
PT2	(6) #5x15'-0"	
PT3	(8) #5x15'-0"	
PT4	(12) #5x10'-0"	
PT5	(10) #5x20'-0"	
PT6	(18) #5x12'-0" @ 5"	STAGGER 3'-0"
PT7	(14) #5x10'-0"	
PT8	(16) #5x20'-0"	
PT9	(14) #5x15'-0"	
PT10	(12) #5x20'-0"	
PT11	(12) #5x15'-0"	
PT30	#5x10'-0" @ 15"	
PT31	#5x12'-0" @ 12"	STAGGER 2'-0"
PT33	#5x6'-0" @ 12"	

PT TOP REINFORCEMENT SCHEDULE		
MARK	REINFORCING	REMARKS
PT50	(3) #5x5'-2"	HOOK AT END
PT51	(6) #5x6'-8"	HOOK AT END
PT52	(10) #5x9'-2"	HOOK AT END
PT53	(8) #5x6'-8"	HOOK AT END
PT54	(6) #5x14'-2"	HOOK AT END
PT55	(8) #5x14'-2"	HOOK AT END
PT56	(16) #5x11'-2"	HOOK AT END
PT57	(16) #5x14'-2"	HOOK AT END
PT58	(12) #5x6'-8" @ 12"	HOOK AT END
PT59	(14) #5x11'-2" @ 12"	HOOK AT END
PT80	#5x11'-2" @ 10"	HOOK AT END
PT81	#5x6'-8" @ 10"	HOOK AT END
PT82	#6x9'-0" @ 4"	HOOK AT END
PT83	#6x9'-0" @ 6"	HOOK AT END
PT84	#6x19'-2" @ 12"	HOOK AT END
PT85	#5x14'-2" @ 12"	HOOK AT END

PT BOTTOM REINFORCEMENT SCHEDULE		
MARK	REINFORCING	REMARKS
PB1	#5x10'-0" @ 6"	
PB2	#5x15'-0" @ 12"	
PB7	#5x20'-0" @ 12"	
PB11	#5x15'-0" @ 12"	LAP SPLICE AT DELAY STRIP PER 12/S4.05
PB18	#5x9'-2" @ 12"	HOOK AT END, SEE 20/S5.01

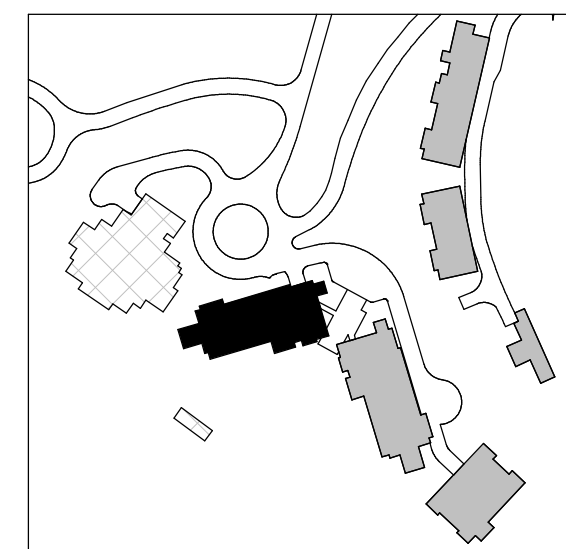

Reserved for permit stamp

150 South Jackson St., Suite 800  
Seattle, Washington 98104 USA  
+1 206 624 5970 olsonkundig.com

**Olson Kundig**

project  
**SOMMET BLANC - ABC**  
DEER VALLEY, UTAH

**MAGNUSSON KLEMENCIC ASSOCIATES**

Structural + Civil Engineers

Seattle, Chicago  
www.mka.com  
206.292.1200

principal architect \_\_\_\_\_

project manager \_\_\_\_\_

drawn by \_\_\_\_\_

checked by \_\_\_\_\_

job no. 20052

date 05/17/2024

revisions:

5 01/07/2025 ASI.007  
04/08/2024 IFC SET 1 OF 3  
11/18/2022 95% CD  
no. date by


IFC SET 2 OF 3

05/17/2024

**TOWER A LEVEL 4  
REINFORCING  
PLAN**

**S2.A.14.R**





Reserved for permit stamp


150 South Jackson St. Suite 800  
Seattle, Washington 98104 USA  
+1 206 624 8970 olsonkundig.com

Olson Kundig

project  
SOMMET BLANC - ABC  
DEER VALLEY, UTAH

MAGNUSSON  
KLEMENCIC  
ASSOCIATES

Structural + Civil Engineers  
Seattle Chicago  
www.mka.com  
206.292.1200

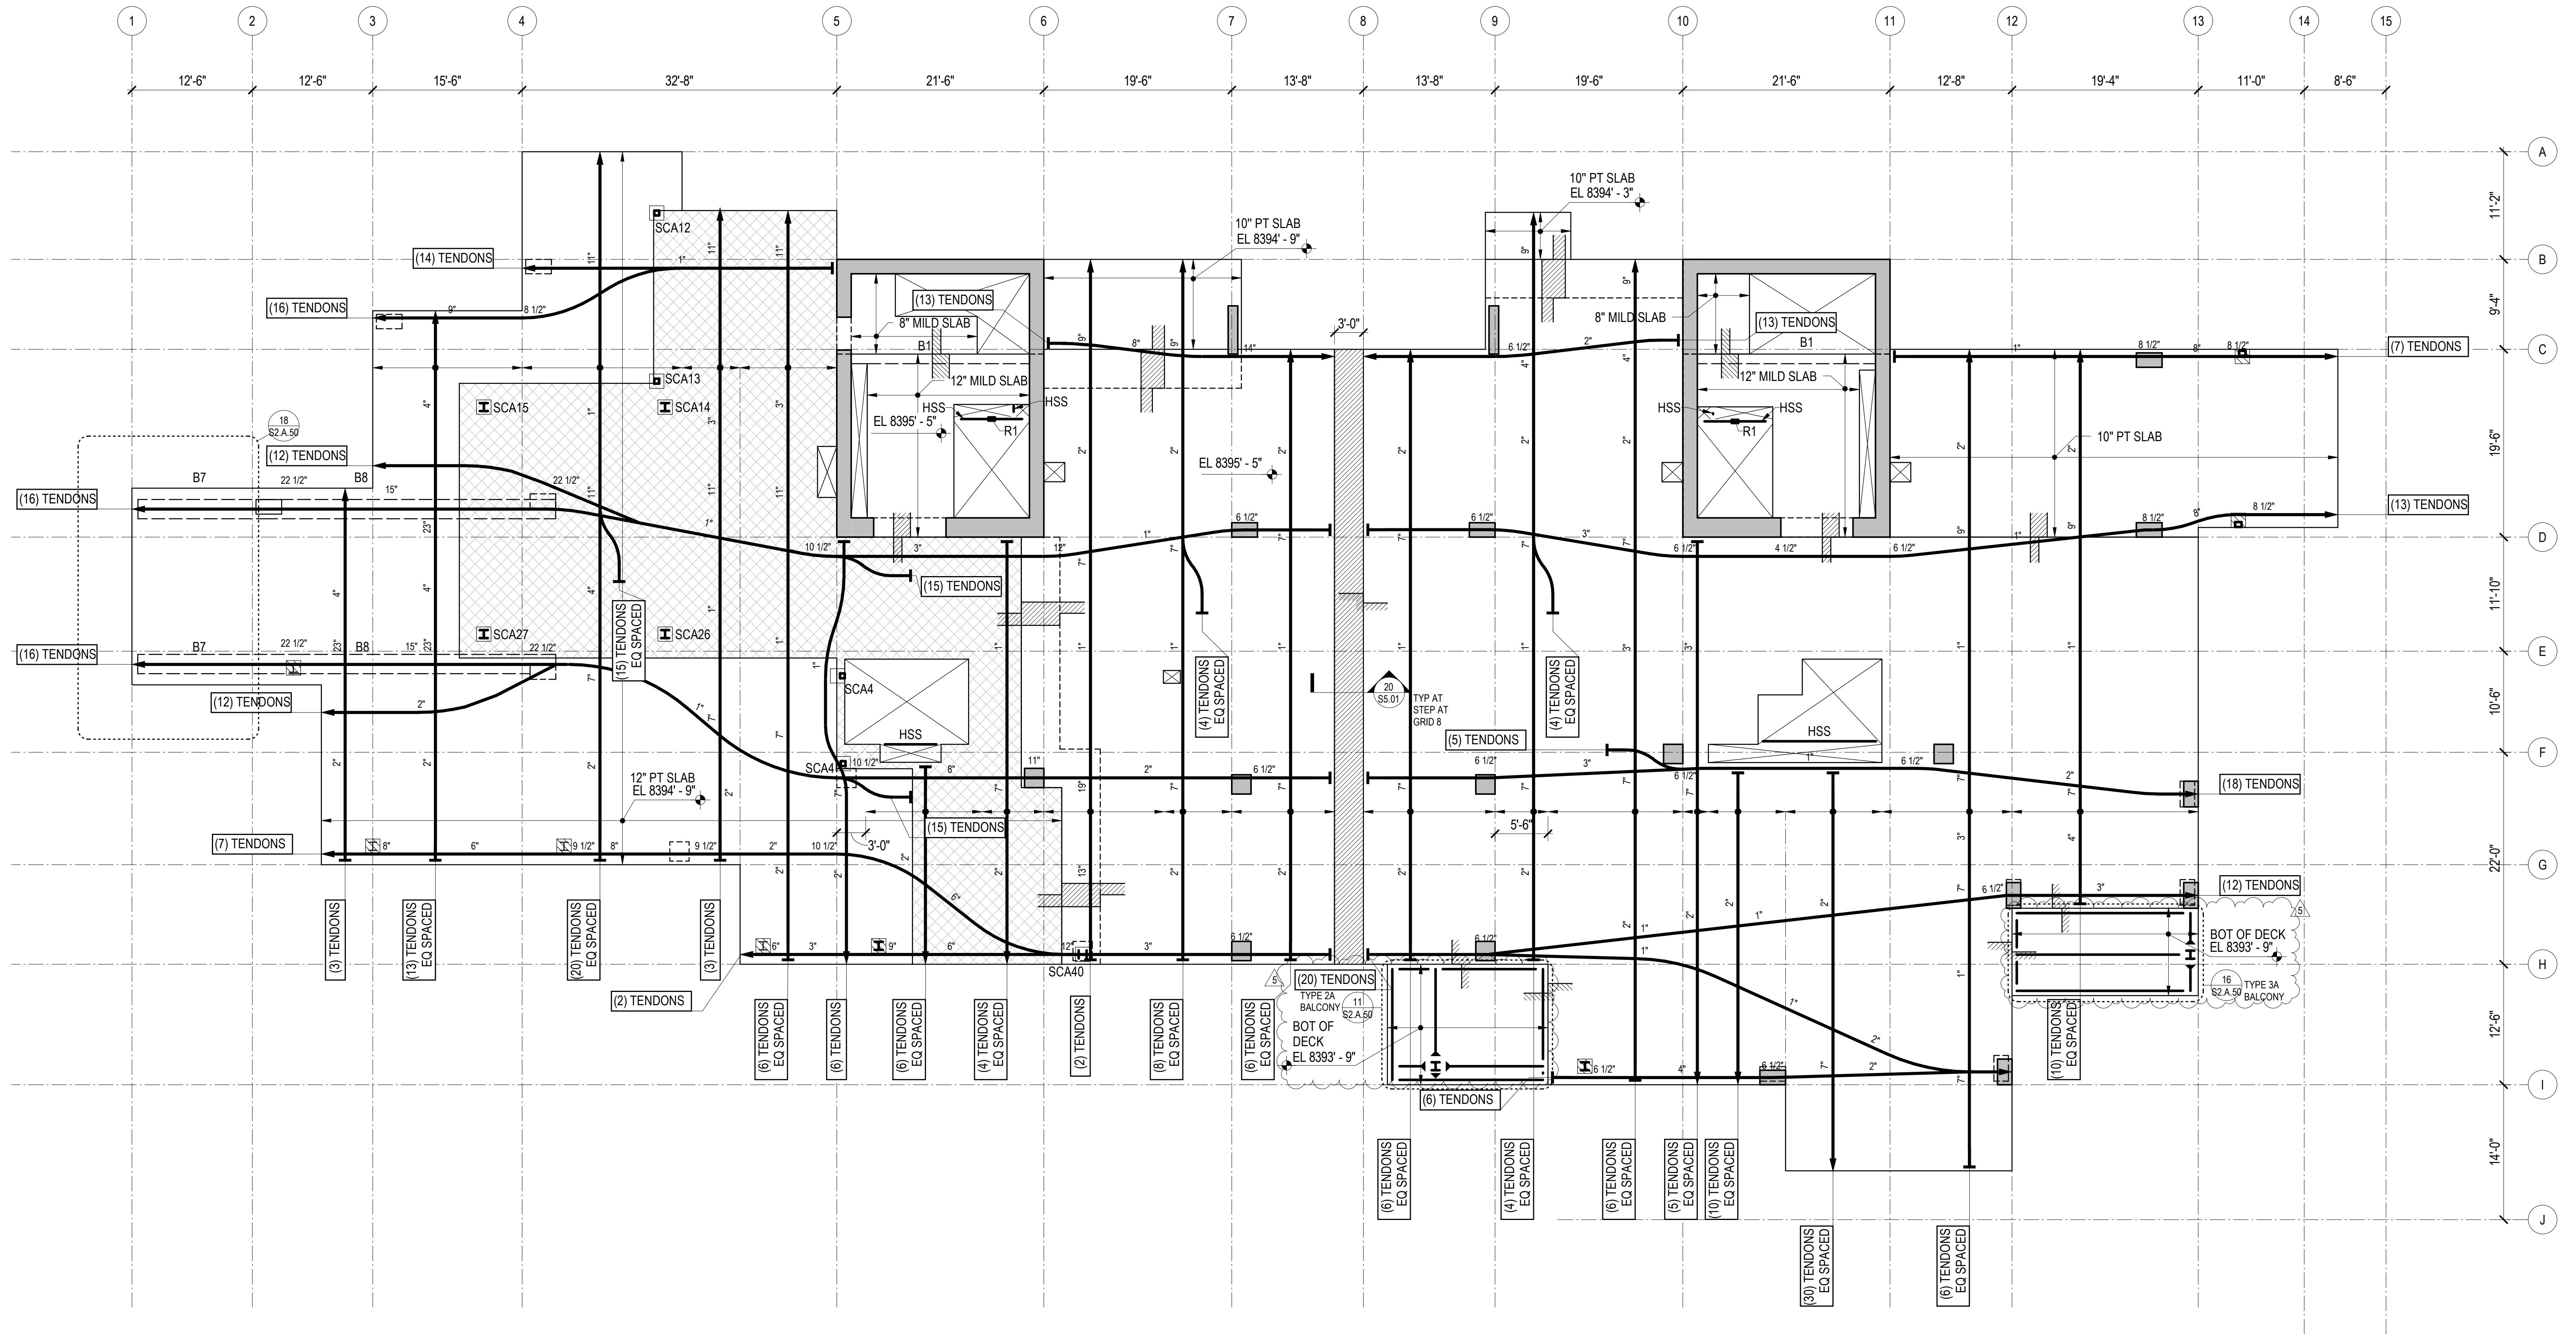

1 TOWER A - LEVEL 5 FRAMING PLAN  
1/8" = 1'-0"



REFERENCE DRAWINGS

S0.XX DRAWING INDEX, ABBREVIATIONS, LEGENDS, GENERAL NOTES  
S1.XX LOAD DIAGRAMS  
S2.XX PLANS  
S3.XX ELEVATIONS  
S4.XX TYPICAL DETAILS AND SCHEDULES  
S5.XX CONCRETE SECTIONS AND DETAILS  
S6.XX STEEL SECTIONS AND DETAILS

NOTES

- REFERENCE FLOOR ELEVATION IS 8395' - 0". TOP OF STRUCTURAL CONCRETE SLAB IS 8394' - 11" UNLESS NOTED OTHERWISE. SEE ARCHITECTURAL DRAWINGS FOR DRAINAGE SLOPES NOT SHOWN.
- STRUCTURAL SLAB IS AN 8-INCH THICK UNBONDED POST-TENSIONED TWO-WAY SLAB UNLESS NOTED OTHERWISE. SEE TYPICAL POST-TENSIONED SLAB DETAILS FOR ADDITIONAL INFORMATION.
- THE MINIMUM NUMBER OF REQUIRED POST-TENSIONING TENDONS IS SHOWN ON THE DRAWINGS. FINAL COUNT, LAYOUT, AND LIVE END LOCATION IS PER DEFERRED DESIGN-BUILD SUBMITTAL PROVIDED BY THE CONTRACTOR.
- CONCRETE PLACED IN THE SLAB/SHEAR WALL INTERSECTION, INCLUDING COUPLING BEAMS, SHALL HAVE MINIMUM CONCRETE STRENGTH EQUAL TO THAT SPECIFIED FOR THE SHEAR WALLS.
- CONCRETE PLACED IN THE SLAB/COLUMN INTERSECTION SHALL HAVE MINIMUM CONCRETE STRENGTH AS SHOWN IN THE GENERAL NOTES, BUT NO LESS THAN THAT SPECIFIED FOR THE COLUMNS DIVIDED BY 1.4.
- COORDINATE LOCATION OF ALL EMBEDS WITH MECHANICAL, ELECTRICAL, PLUMBING, AND EXTERIOR WALL SYSTEMS PRIOR TO CASTING THE SLAB.

- SEE ARCHITECTURAL, MECHANICAL, PLUMBING, ELECTRICAL, AND OTHER DISCIPLINES DRAWINGS FOR OPENING SIZES AND LOCATIONS NOT SHOWN ON PLAN. SEE "TYPICAL OPENINGS AND EMBEDMENTS IN CONCRETE" DETAILS FOR OPENING PLACEMENT CRITERIA. NOTIFY THE STRUCTURAL ENGINEER OF ANY OPENINGS NOT SHOWN ON THE STRUCTURAL DRAWINGS FOR WHICH THE TYPICAL DETAILS DO NOT APPLY.
- REFERENCE ALL CONSTRUCTION DOCUMENTS FOR SIZE, EXTENT, AND LOCATION OF CONCRETE CURBS, HOUSEKEEPING PADS, CMU WALLS, PLANTER WALLS, BOLLARDS, AND EDGE ANGLES. REINFORCE PER THE TYPICAL DETAILS.
- INDICATES POUR STRIPS. WAIT 28 DAYS MINIMUM AFTER PLACING SLAB CONCRETE PRIOR TO CASTING POUR STRIPS. SEE "TYPICAL POST-TENSIONED DELAY STRIP" DETAIL FOR MORE INFORMATION.
- INDICATES TYPICAL BUILT-UP SLAB ON RIGID FOAM. SEE ARCHITECTURAL DRAWINGS FOR LOCATIONS AND ELEVATIONS OF ARCHITECTURAL BUILT-UP SLABS. SEE TYPICAL BUILT-UP SLAB DETAIL FOR ADDITIONAL INFORMATION.
- "SC#" INDICATES STEEL COLUMN MARK FOR COLUMNS NOT LOCATED BY GRID. SEE TYPICAL STEEL COLUMN DETAILS AND SCHEDULE FOR ADDITIONAL INFORMATION.

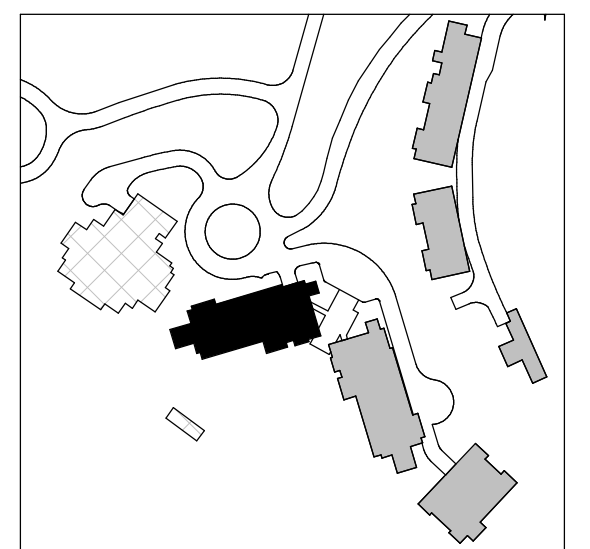

principal architect \_\_\_\_\_  
project manager \_\_\_\_\_  
drawn by \_\_\_\_\_  
checked by \_\_\_\_\_  
job no. 20052  
date 05/17/2024

revisions:

5	01/07/2025	ASI-007
3	9/19/2024	ASI-004
	04/08/2024	IFC SET 1 OF 3
	11/18/2022	95% CD
no.	date	by


IFC SET 2 OF 3

05/17/2024

TOWER A LEVEL 5  
FRAMING PLAN

S2.A.15









A map of the study area showing the location of the study site (black rectangle) relative to the surrounding landscape. The map includes a north arrow pointing upwards.






S0.XX	DRAWING INDEX, ABBREVIATIONS, LEGENDS, GENERAL NOTES
S1.XX	LOAD DIAGRAMS
S2.XX	PLANS
S3.XX	ELEVATIONS
S4.XX	TYPICAL DETAILS AND SCHEDULES
S5.XX	CONCRETE SECTIONS AND DETAILS
S6.XX	STEEL SECTIONS AND DETAILS

1. REFERENCE FLOOR ELEVATION IS 8419' - 6". TOP OF SLAB ON STEEL DECK IS AT THE REFERENCE ELEVATION UNLESS NOTED OTHERWISE. SEE ARCHITECTURAL DRAWINGS FOR DRAINAGE SLOPES NOT SHOWN.
2. STRUCTURAL SLAB IS 3-INCHES OF LIGHTWEIGHT CONCRETE ON 3-INCH COMPOSITE STEEL DECK UNLESS NOTED OTHERWISE. REINFORCE WITH WWR #6-W2/W2.9XW2.9. SEE TYPICAL SLAB ON STEEL DECK DETAILS FOR REINFORCING AND OTHER INFORMATION. REINFORCING SHOWN ON THE PLAN AND IN THE TYPICAL DETAILS IS IN ADDITION TO THIS REINFORCING.
3. REFERENCE TOP OF STEEL IS AT THE BOTTOM OF SLAB ON STEEL DECK UNLESS NOTED OTHERWISE.

4. STEEL SLABS UNIFORMLY INTERSECT BETWEEN GIVEN TOP OF STEEL ELEVATIONS. WHERE BEAMS OR BEAMS AND COLUMNS INTERSECT, MATCH TOP OF STEEL UNLESS NOTED OTHERWISE.
5. COORDINATE LOCATION OF ALL EMBEDS WITH MECHANICAL, ELECTRICAL, PLUMBING, AND EXTERIOR WALL SYSTEMS PRIOR TO CASTING SLABS AND WALLS.
6. SEE ARCHITECTURAL, MECHANICAL, PLUMBING, ELECTRICAL, AND OTHER DISCIPLINES DRAWINGS FOR OPENING SIZES AND LOCATIONS NOT SHOWN ON PLAN. SEE TYPICAL OPENINGS AND EMBEDMENTS IN CONCRETE, TYPICAL ROOF DECK OPENINGS, AND TYPICAL COMPOSITE DECK OPENINGS' DETAILS FOR OPENING PLACEMENT CRITERIA AND REINFORCING OR FRAMING REQUIREMENTS. NOTIFY STRUCTURAL ENGINEER OF ANY OPENINGS NOT SHOWN ON THE STRUCTURAL DRAWINGS FOR WHICH THE TYPICAL DETAILS DO NOT APPLY.



Reserved for permit stamp

159 South Jackson St., Suite 600  
Seattle, Washington 98104 USA  
+1 206 624 5670 olsonkundin.com

# Olson Kundig

Project: **SOMMET BLANC - ABC**  
**DEER VALLEY, UTAH**

MAGNUSSON  
KLEMENCIC  
ASSOCIATES

**Structural + Civil Engineers**  
Seattle Chicago  
www.mka.com  
206.292.1200

principal architect \_\_\_\_\_  
project manager \_\_\_\_\_  
drawn by \_\_\_\_\_

checked by \_\_\_\_\_  
job no. 20052  
date 05/17/2024

revisions:

3	8/19/2024	ASI-004
2	7/26/2024	ASI-002
	04/08/2024	IFC SET 1 OF 3
	11/18/2022	95% CD
no.	date	by


IFC SET 2 OF 3

05/17/2024

TOWER A ROOF  
FRAMING PLAN

S2.A.17





Reserved for permit stamp

150 South Jackson St., Suite 800  
Seattle, Washington 98104 USA  
+1 206 624 9970 olsonkundig.com

**Olson Kundig**

project:  
**SOMMET BLANC - ABC**  
DEER VALLEY, UTAH

**MAGNUSSON KLEMENCIC ASSOCIATES**

Structural + Civil Engineers  
Seattle Chicago  
www.mka.com  
206.292.1200


principal architect \_\_\_\_\_  
project manager \_\_\_\_\_  
drawn by \_\_\_\_\_  
checked by \_\_\_\_\_  
job no. 20052  
date 05/17/2024  
revisions: \_\_\_\_\_  
no. date by

IFC SET 2 OF 3

05/17/2024

TOWER A PARTIAL PLANS

**S2.A.50**

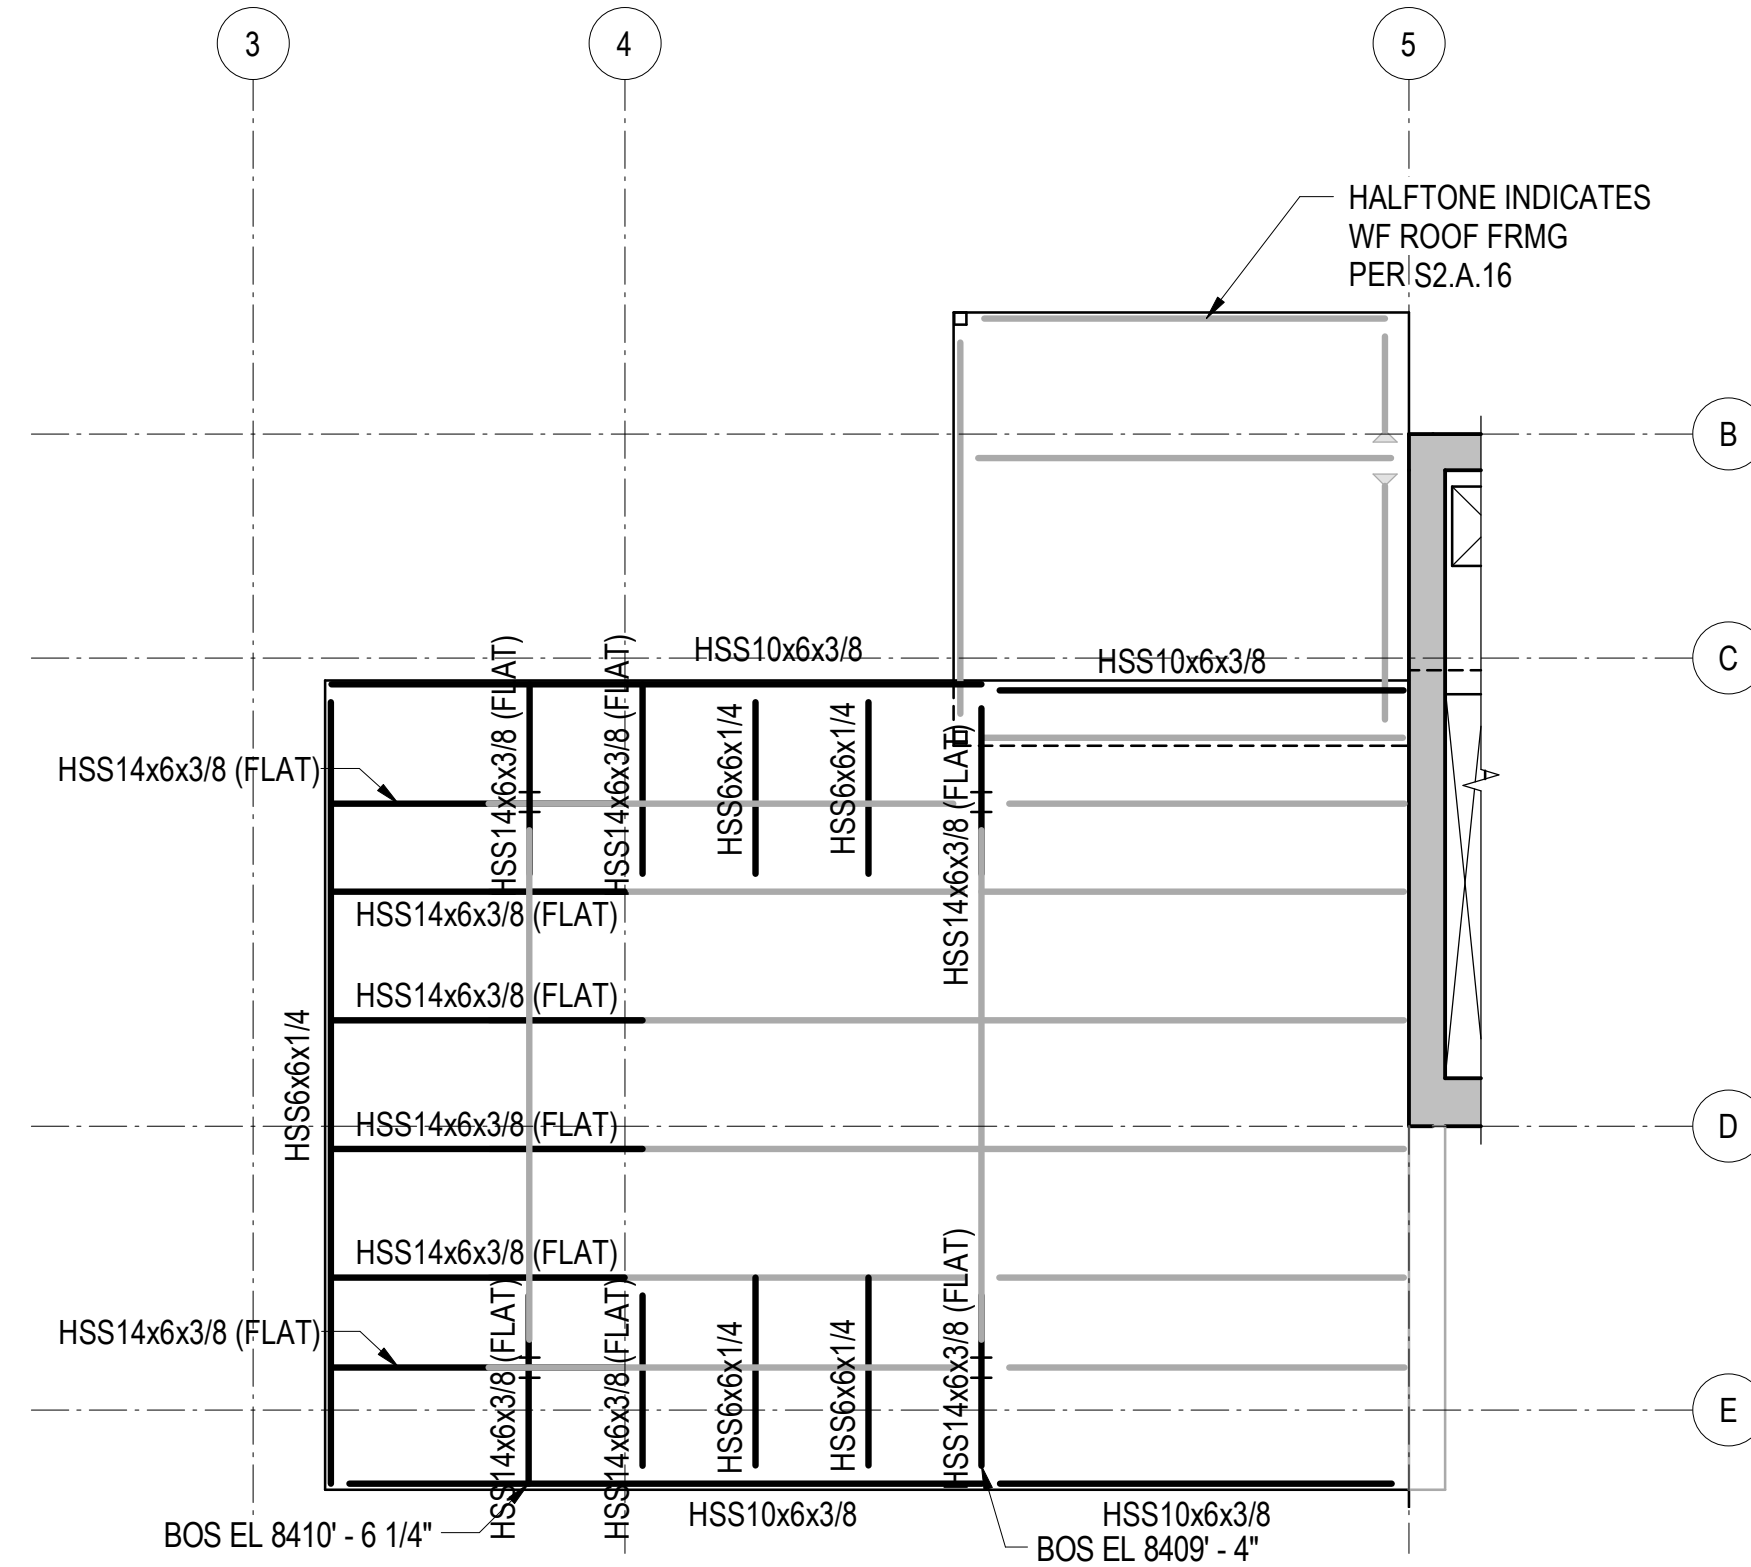

#### REFERENCE DRAWINGS


- S0.XX DRAWING INDEX, ABBREVIATIONS, LEGENDS, GENERAL NOTES
- S1.XX LOAD DIAGRAMS
- S2.XX PLANS
- S3.XX ELEVATIONS
- S4.XX TYPICAL DETAILS AND SCHEDULES
- S5.XX CONCRETE SECTIONS AND DETAILS
- S6.XX STEEL SECTIONS AND DETAILS

#### NOTES

- REFER TO CORRESPONDING ROOF FRAMING PLAN FOR ADDITIONAL SHEET NOTES.
- FRAMING PLAN INDICATES HSS FRAMING THAT IS EMBEDDED WITHIN THE SLAB ON STEEL DECK THICKNESS.
- BOTTOM OF STEEL IS AT THE BOTTOM OF SLAB ON STEEL DECK.


### 7 PARTIAL PLAN - LEVEL 6 EMBEDDED HSS ROOF FRAMING

1/8" = 1'-0"

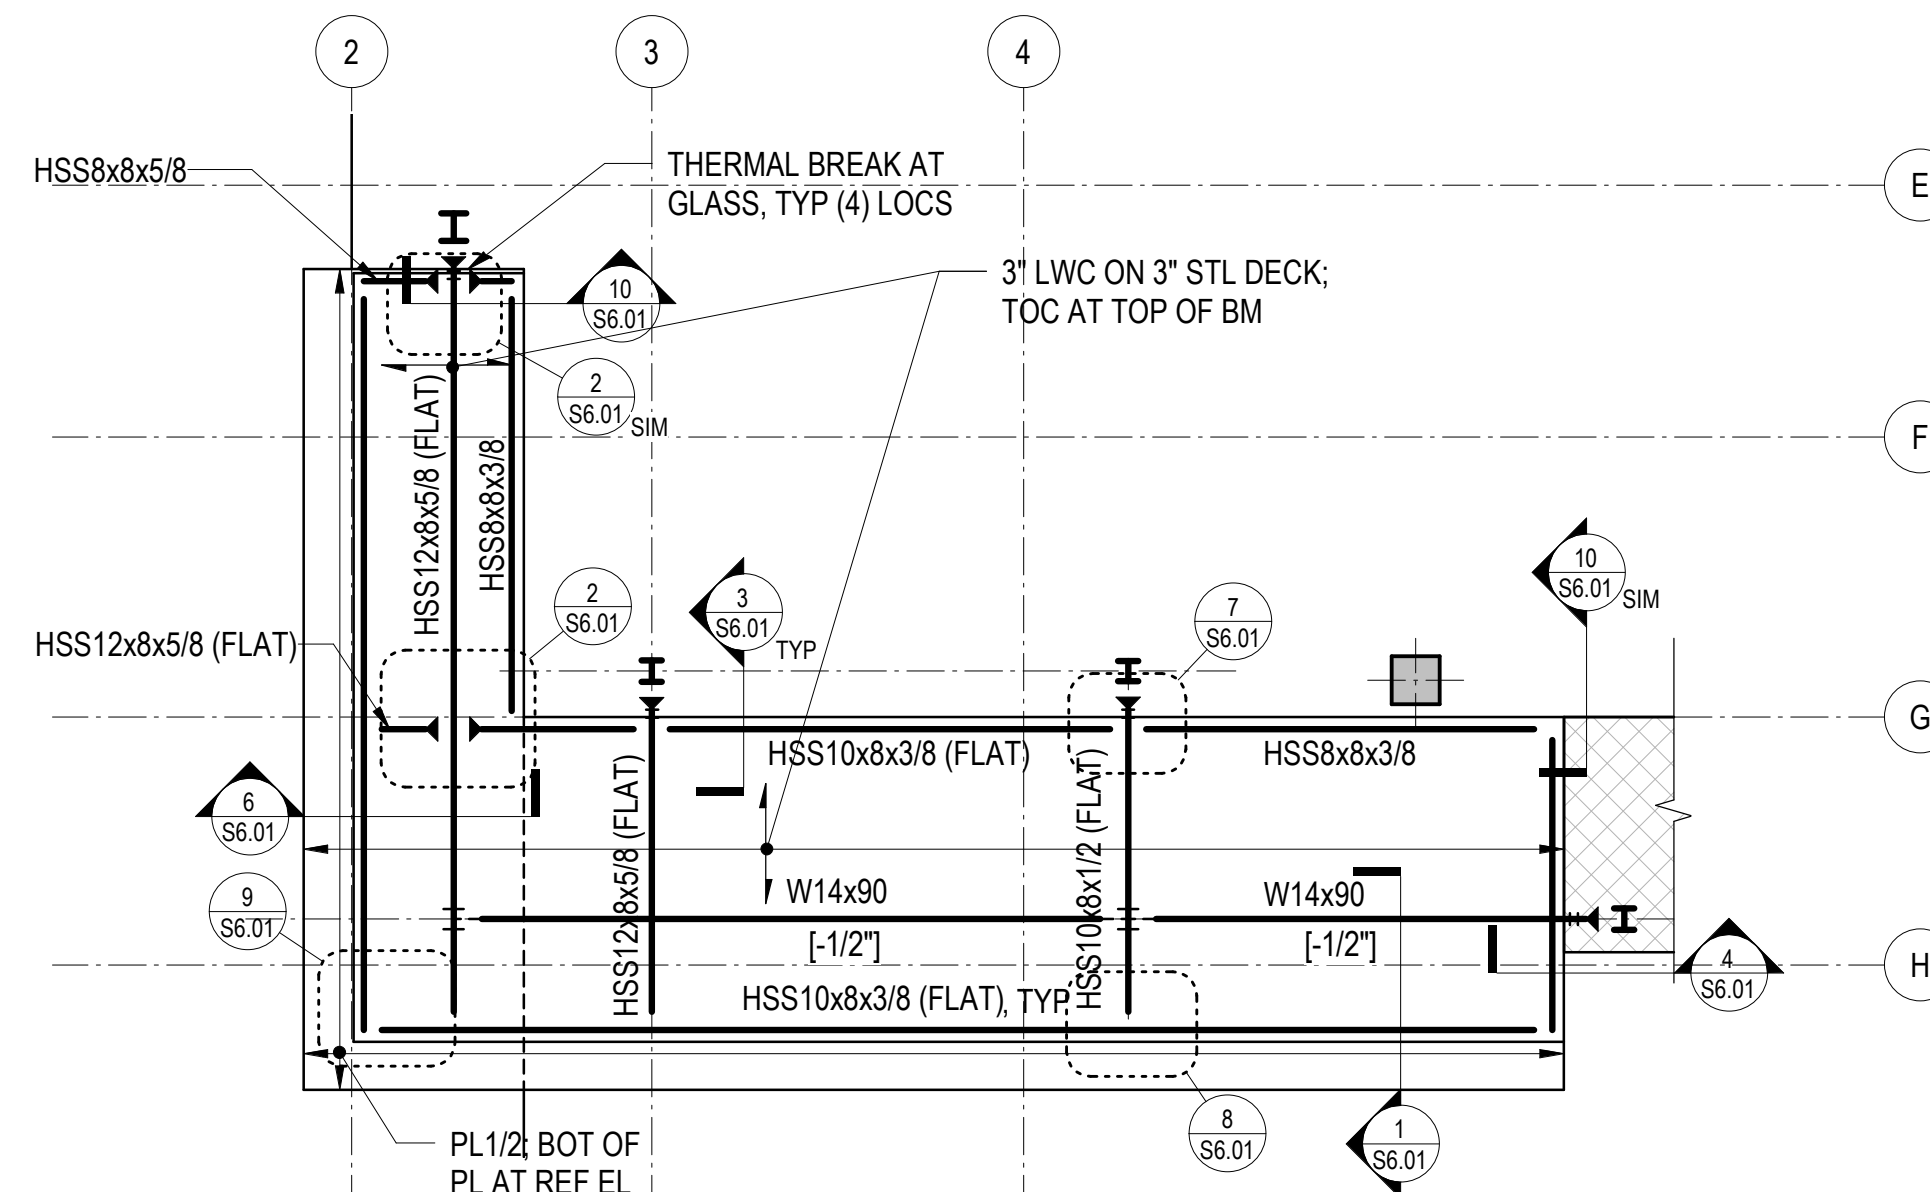

### 11 PARTIAL PLAN - TYPE 2A BALCONY

1/8" = 1'-0"

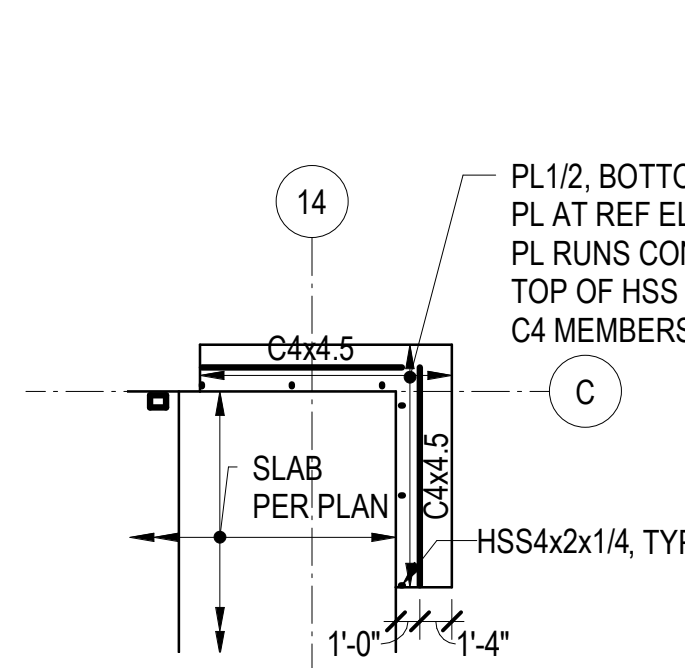


#### NOTES

- REFERENCE FLOOR ELEVATIONS ARE:  
TOWER A LEVEL 4: 8383'-0"  
TOWER A LEVEL 6: 8407'-6"  
TOP OF STEEL IS AT THE REFERENCE FLOOR ELEVATION UNLESS NOTED OTHERWISE.
- SEE ARCHITECTURAL DETAILS FOR ADDITIONAL INFORMATION.

### 17 PARTIAL PLAN - TOWER A EAST SUNSHADES

1/8" = 1'-0"

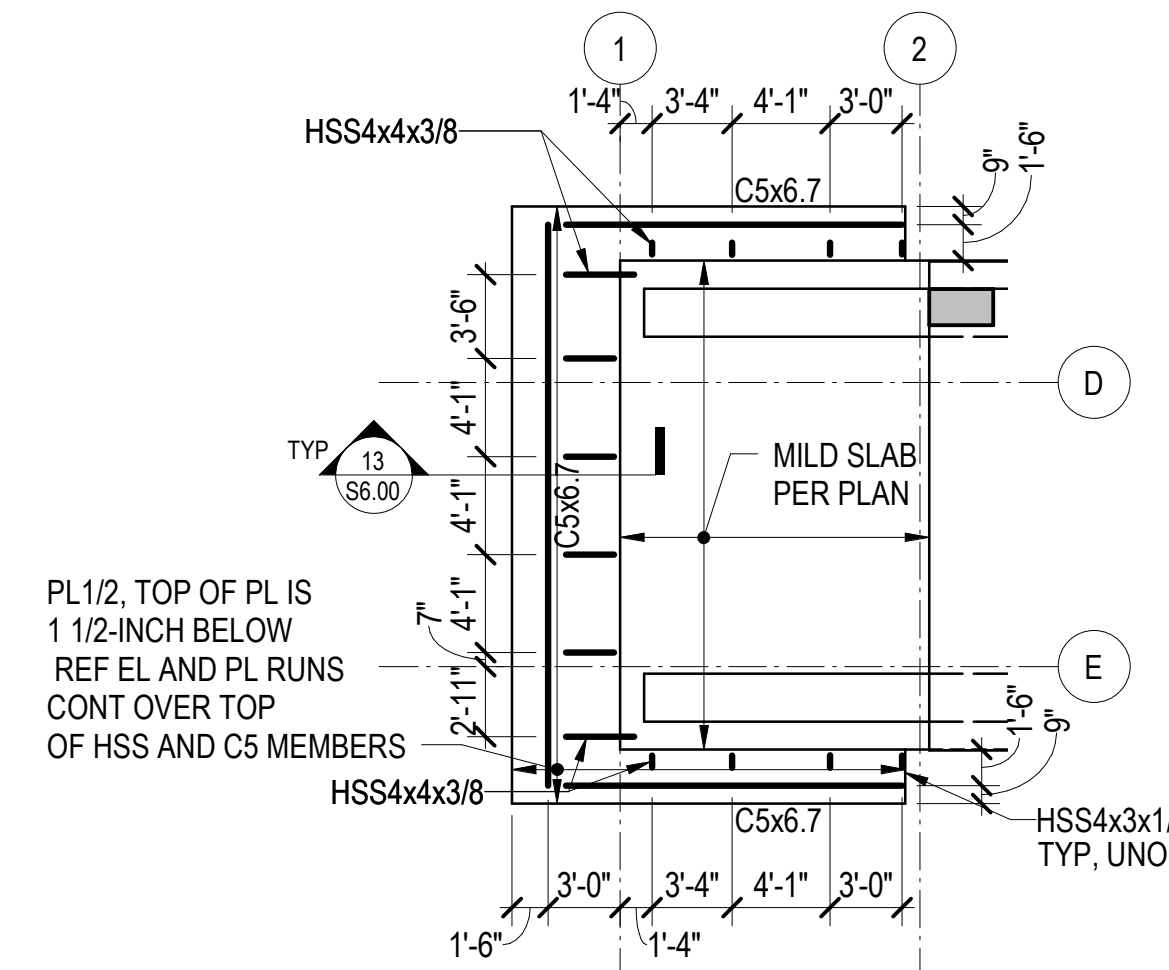


#### NOTES

- REFERENCE FLOOR ELEVATIONS ARE:  
TOWER A LEVEL 3: 8371'-0"  
TOWER A LEVEL 5: 8393'-6"
- SEE ARCHITECTURAL DETAILS FOR ADDITIONAL INFORMATION.

### 18 PARTIAL PLAN - TOWER A SUNSHADES

1/8" = 1'-0"

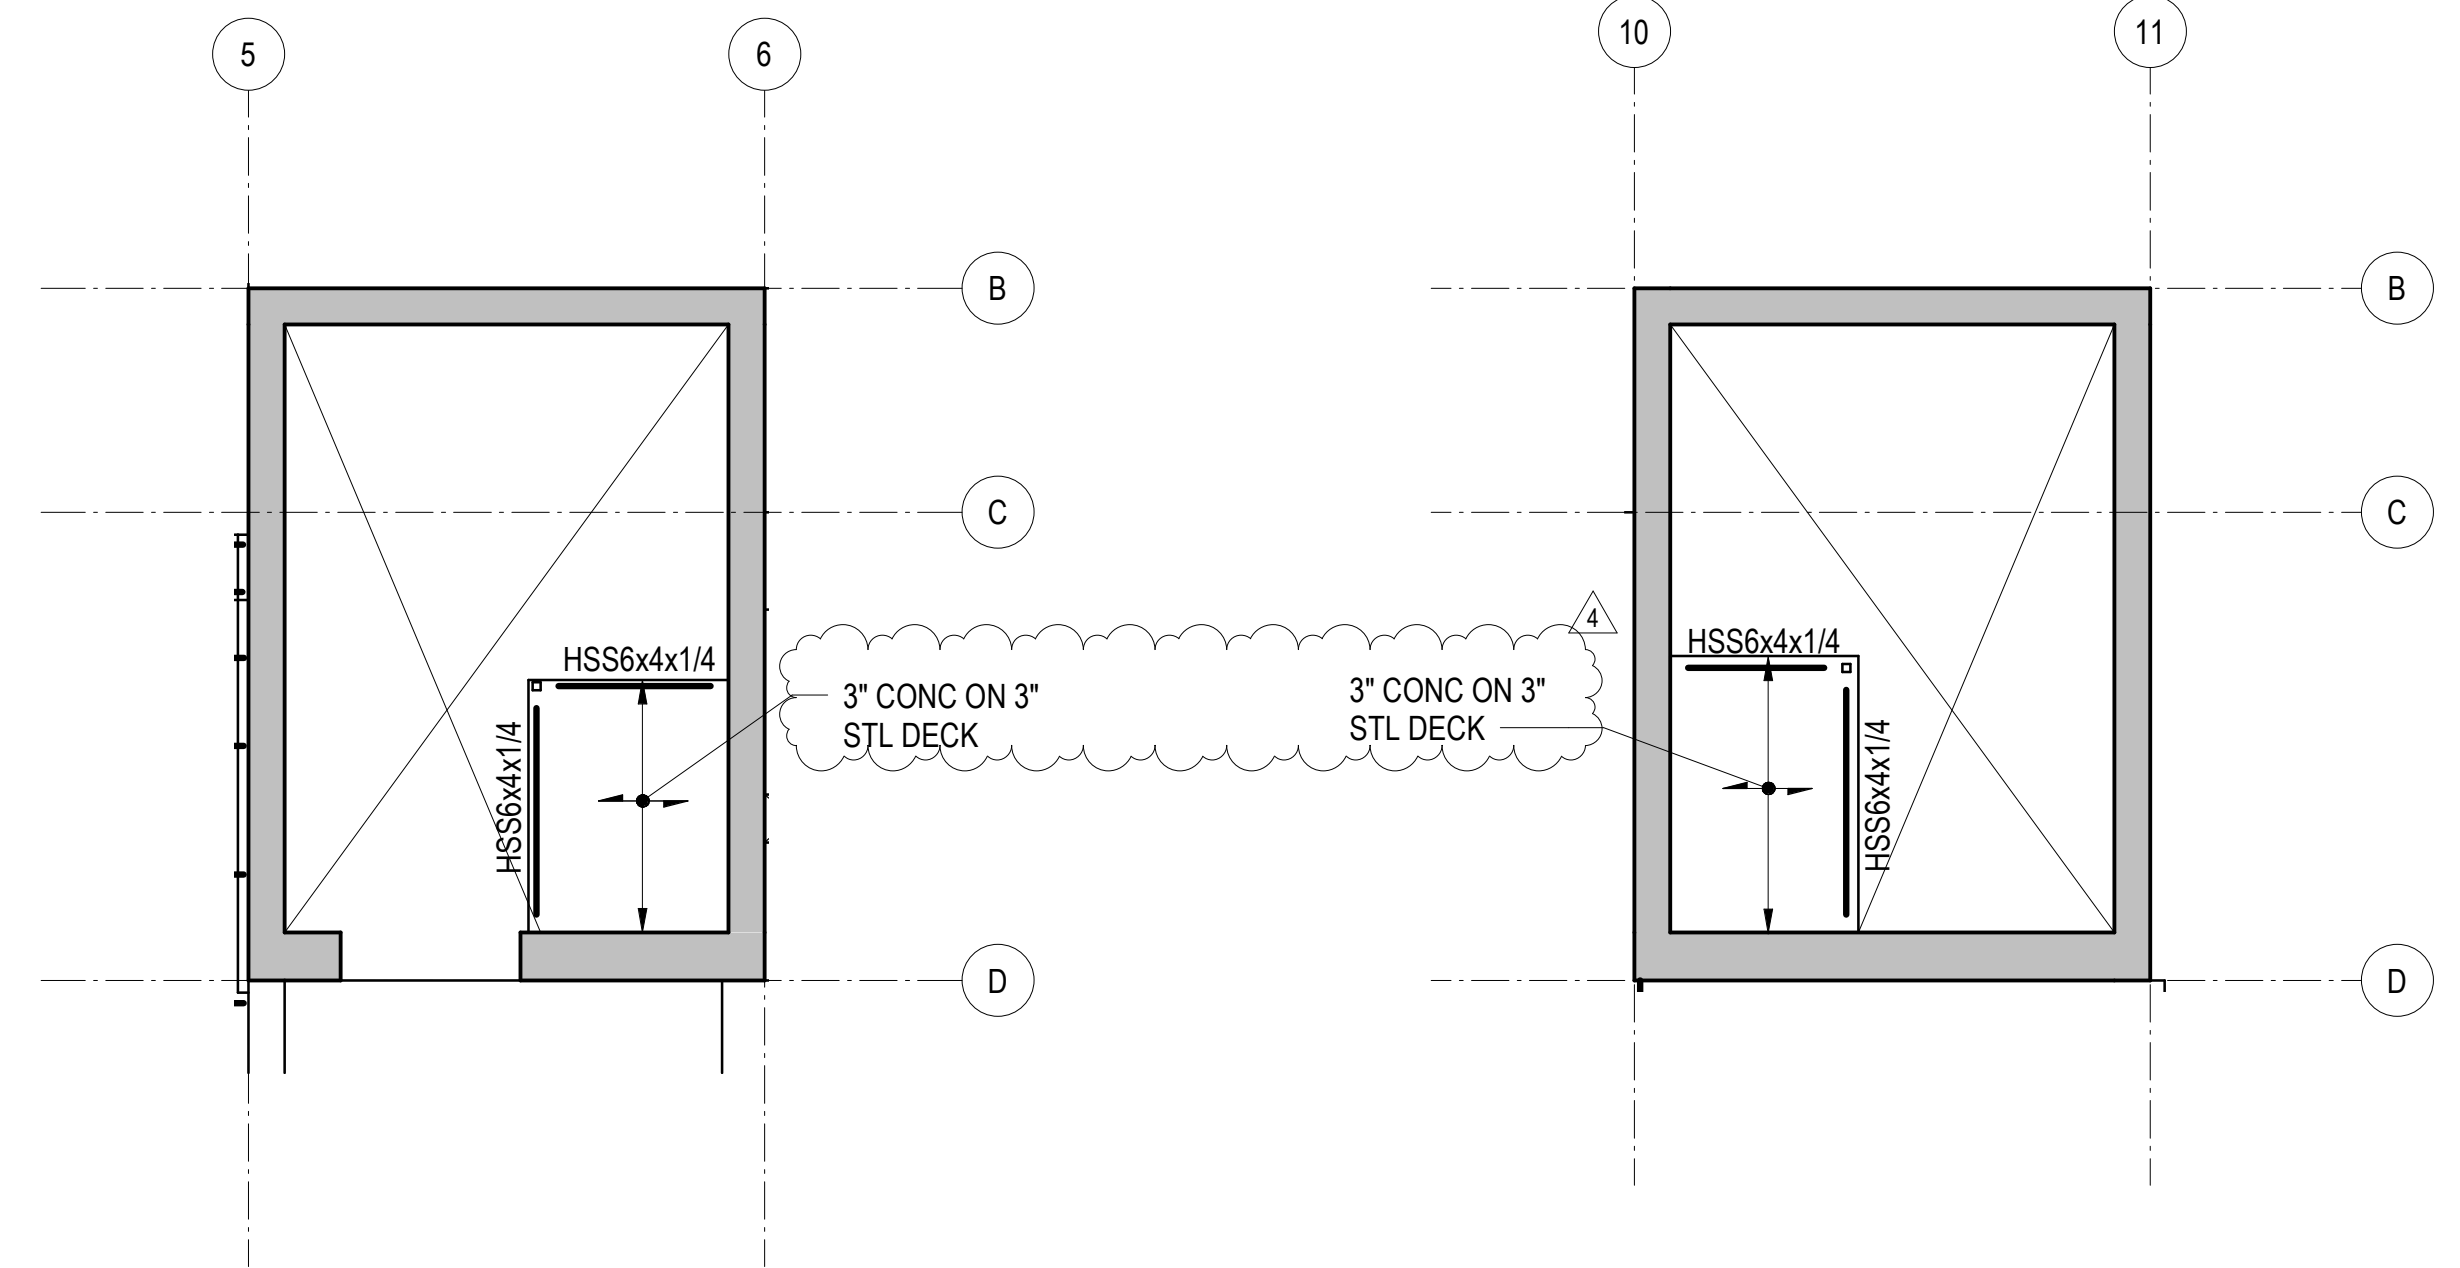


#### NOTES

- REFERENCE FLOOR ELEVATION IS 8410'-10". REFERENCE TOP OF STRUCTURAL STEEL IS 6-INCHES BELOW THE REFERENCE FLOOR ELEVATION, TYPICAL UNLESS NOTED OTHERWISE.
- STRUCTURAL SLAB IS 3-INCHES OF CONCRETE ON 3-INCH COMPOSITE STEEL DECK UNLESS NOTED OTHERWISE. REINFORCE WITH WWR 6x6-W2.9xW2.9. SEE TYPICAL SLAB ON STEEL DECK DETAILS FOR REINFORCING AND OTHER INFORMATION. REINFORCING SHOWN ON THE PLAN AND IN THE TYPICAL DETAILS IS IN ADDITION TO THIS REINFORCING.

### 9 PARTIAL PLAN - WEST CORE ELEV OVERRUN

1/8" = 1'-0"

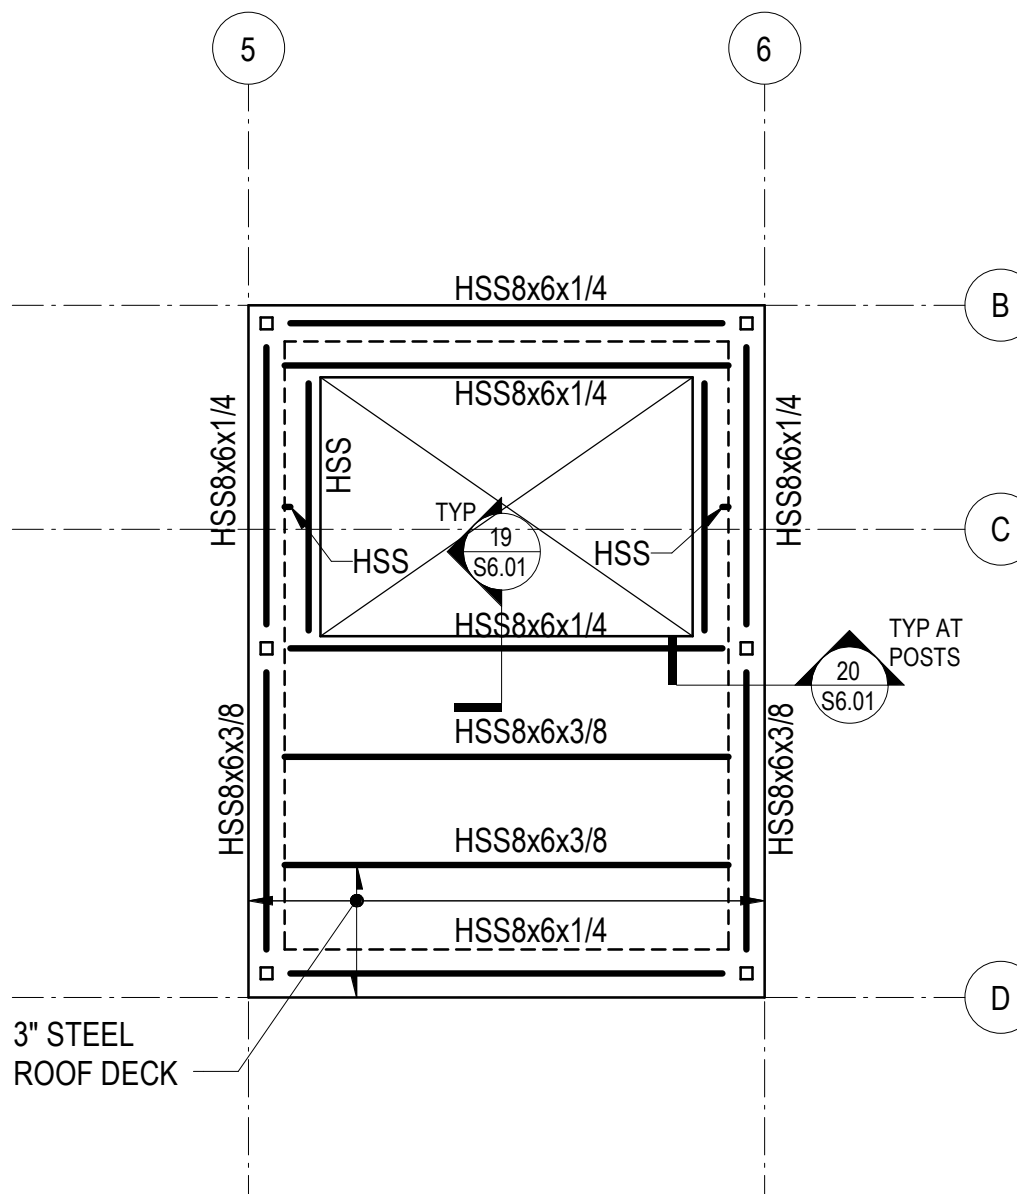

#### NOTES

- REFERENCE FLOOR ELEVATION IS 8423'-3". REFERENCE TOP OF STRUCTURAL STEEL IS AT THE REFERENCE FLOOR ELEVATION, TYPICAL UNLESS NOTED OTHERWISE.
- ROOF DECK IS MINIMUM 3/8" x 20 GAUGE STEEL DECKING. TOP OF DECK IS AT TOP OF STEEL UNLESS NOTED OTHERWISE.

### 19 PARTIAL PLAN - TOP OF WEST CORE


1/8" = 1'-0"

#### NOTES

- REFERENCE FLOOR ELEVATION IS 8423'-8". REFERENCE TOP OF STRUCTURAL STEEL IS 6-INCHES BELOW THE REFERENCE FLOOR ELEVATION, TYPICAL UNLESS NOTED OTHERWISE.
- STRUCTURAL SLAB IS 3-INCHES OF CONCRETE ON 3-INCH COMPOSITE STEEL DECK UNLESS NOTED OTHERWISE. REINFORCE WITH WWR 6x6-W2.9xW2.9. SEE TYPICAL SLAB ON STEEL DECK DETAILS FOR REINFORCING AND OTHER INFORMATION. REINFORCING SHOWN ON THE PLAN AND IN THE TYPICAL DETAILS IS IN ADDITION TO THIS REINFORCING.

### 10 PARTIAL PLAN - EAST CORE ELEV OVERRUN

1/8" = 1'-0"

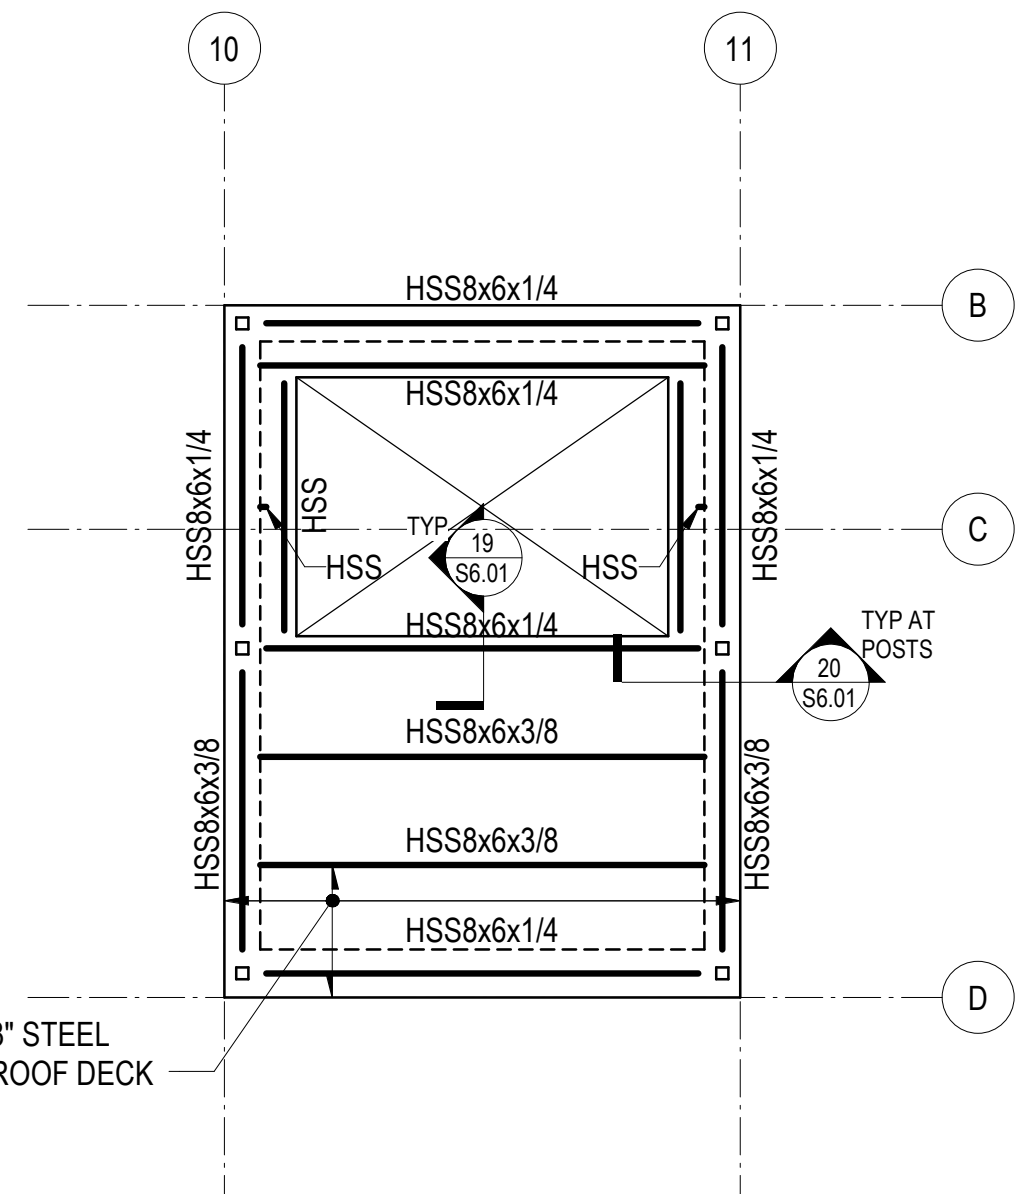


#### NOTES

- REFERENCE FLOOR ELEVATION IS 8429'-9". REFERENCE TOP OF STRUCTURAL STEEL IS AT THE REFERENCE FLOOR ELEVATION, TYPICAL UNLESS NOTED OTHERWISE.
- ROOF DECK IS MINIMUM 3/8" x 20 GAUGE STEEL DECKING. TOP OF DECK IS AT TOP OF STEEL UNLESS NOTED OTHERWISE.

### 20 PARTIAL PLAN - TOP OF EAST CORE

1/8" = 1'-0"

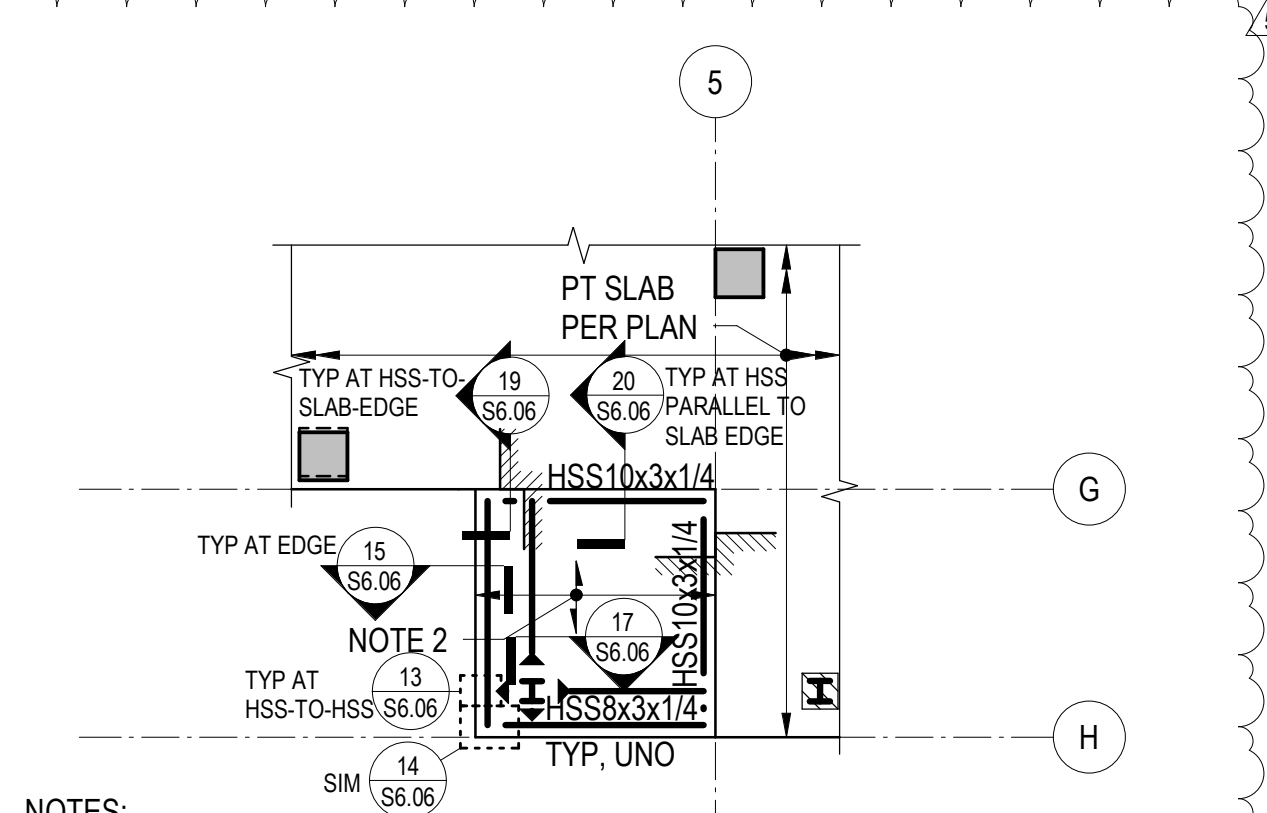


#### NOTES

- SEE RELEVANT PLANS FOR REFERENCE ELEVATION. TOP OF STEEL IS AT BOTTOM OF DECK UNLESS NOTED OTHERWISE.
- STRUCTURAL SLAB IS 3-INCHES OF CONCRETE ON 3-INCH COMPOSITE STEEL DECK UNLESS NOTED OTHERWISE. REINFORCE WITH WWR 6x6-W2.9xW2.9. SEE TYPICAL SLAB ON STEEL DECK DETAILS FOR REINFORCING AND OTHER INFORMATION. REINFORCING SHOWN ON THE PLAN AND IN THE TYPICAL DETAILS IS IN ADDITION TO THIS REINFORCING.

### 6 PARTIAL PLAN - TYPE 1A BALCONY

1/8" = 1'-0"

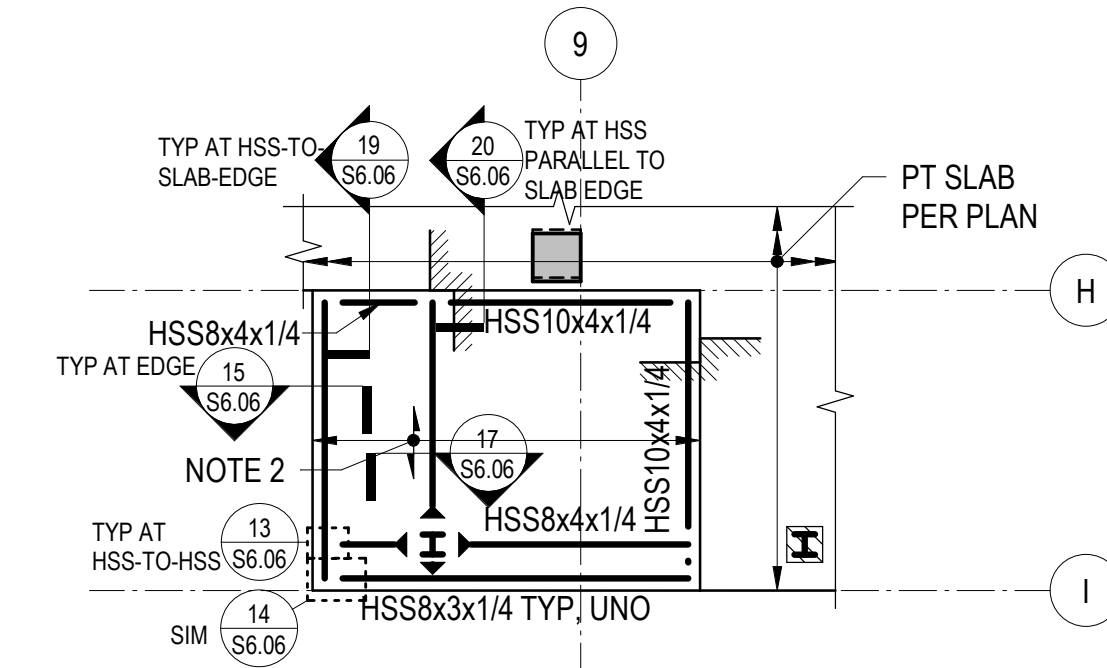


#### NOTES

- SEE RELEVANT PLANS FOR REFERENCE ELEVATION. TOP OF STEEL IS AT BOTTOM OF DECK UNLESS NOTED OTHERWISE.
- STRUCTURAL SLAB IS 3-INCHES OF CONCRETE ON 3-INCH COMPOSITE STEEL DECK UNLESS NOTED OTHERWISE. REINFORCE WITH WWR 6x6-W2.9xW2.9. SEE TYPICAL SLAB ON STEEL DECK DETAILS FOR REINFORCING AND OTHER INFORMATION. REINFORCING SHOWN ON THE PLAN AND IN THE TYPICAL DETAILS IS IN ADDITION TO THIS REINFORCING.

### 11 PARTIAL PLAN - TYPE 2A BALCONY

1/8" = 1'-0"

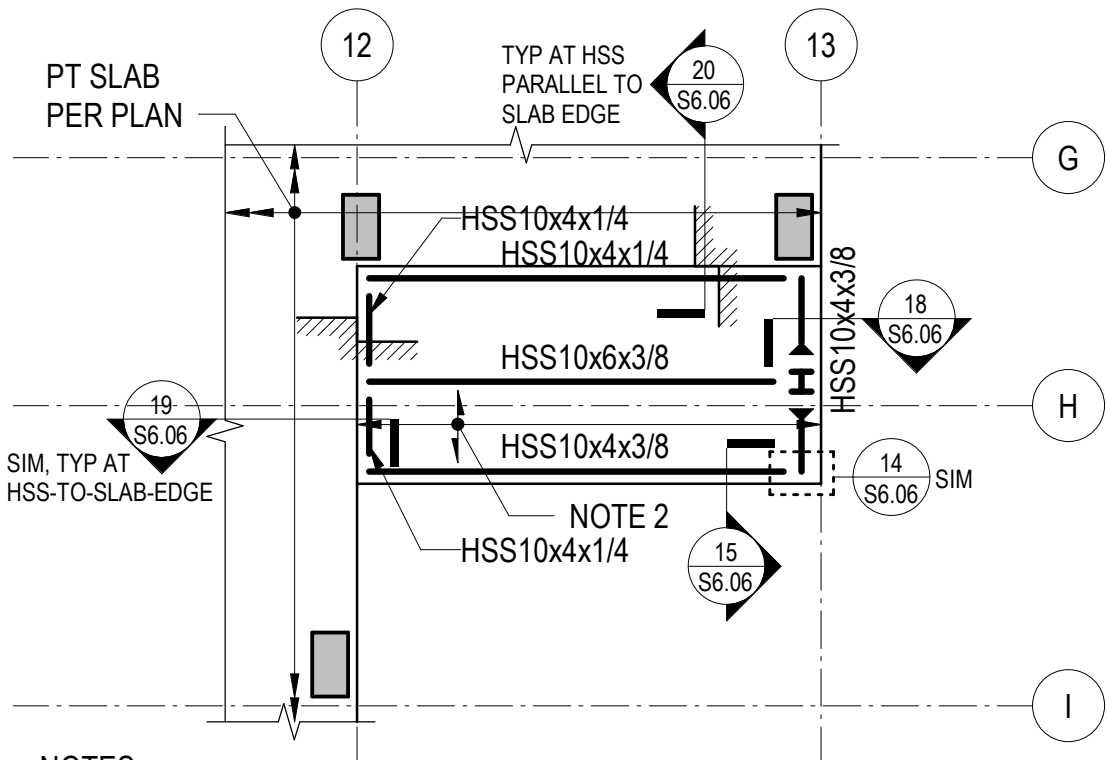


#### NOTES

- SEE RELEVANT PLANS FOR REFERENCE ELEVATION. TOP OF STEEL IS AT BOTTOM OF DECK UNLESS NOTED OTHERWISE.
- STRUCTURAL SLAB IS 3-INCHES OF CONCRETE ON 3-INCH COMPOSITE STEEL DECK UNLESS NOTED OTHERWISE. REINFORCE WITH WWR 6x6-W2.9xW2.9. SEE TYPICAL SLAB ON STEEL DECK DETAILS FOR REINFORCING AND OTHER INFORMATION. REINFORCING SHOWN ON THE PLAN AND IN THE TYPICAL DETAILS IS IN ADDITION TO THIS REINFORCING.

### 16 PARTIAL PLAN - TYPE 3A BALCONY

1/8" = 1'-0"





Reserved for permit stamp

150 South Jackson St., Suite 800  
Seattle, Washington 98104 USA  
+1 206 624 8970 olsonkundig.com

**Olson Kundig**

project:  
**SOMMET BLANC - ABC**  
DEER VALLEY, UTAH

**MAGNUSSON KLEMENCIC ASSOCIATES**

Structural + Civil Engineers  
Seattle Chicago  
www.mka.com  
206.292.1200


principal architect \_\_\_\_\_  
project manager \_\_\_\_\_  
drawn by \_\_\_\_\_  
checked by \_\_\_\_\_  
job no. 20052  
date 05/17/2024  
revisions: \_\_\_\_\_  
no. date by

IFC SET 2 OF 3

05/17/2024

TOWER A PARTIAL PLANS

**S2.A.50**

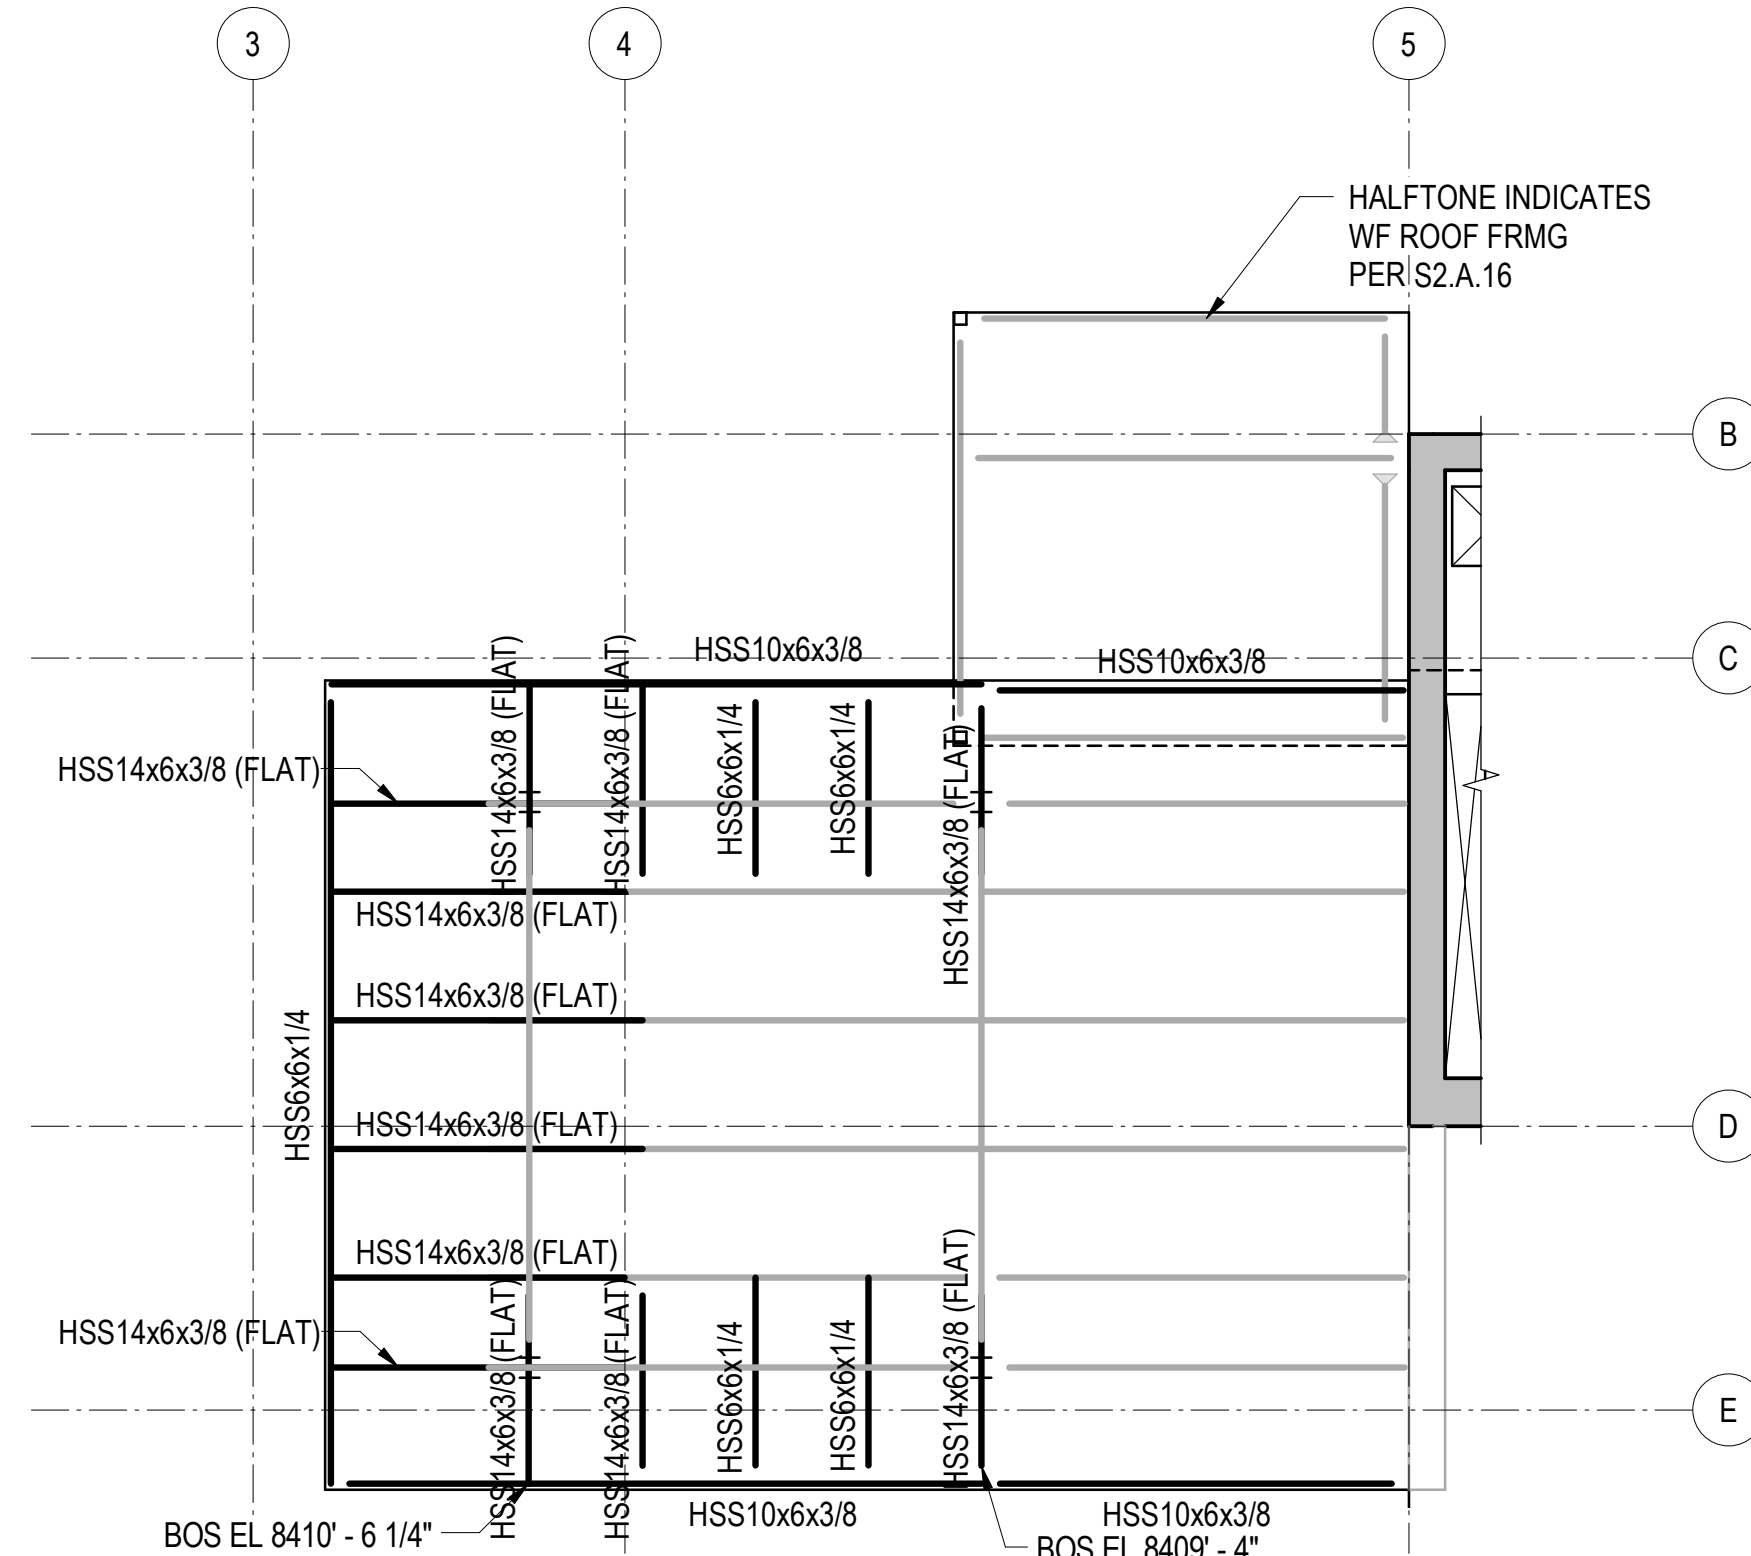

#### REFERENCE DRAWINGS


- S0.XX DRAWING INDEX, ABBREVIATIONS, LEGENDS, GENERAL NOTES
- S1.XX LOAD DIAGRAMS
- S2.XX PLANS
- S3.XX ELEVATIONS
- S4.XX TYPICAL DETAILS AND SCHEDULES
- S5.XX CONCRETE SECTIONS AND DETAILS
- S6.XX STEEL SECTIONS AND DETAILS

#### NOTES

- REFER TO CORRESPONDING ROOF FRAMING PLAN FOR ADDITIONAL SHEET NOTES.
- FRAMING PLAN INDICATES HSS FRAMING THAT IS EMBEDDED WITHIN THE SLAB ON STEEL DECK THICKNESS.
- BOTTOM OF STEEL IS AT THE BOTTOM OF SLAB ON STEEL DECK.


### 7 PARTIAL PLAN - LEVEL 6 EMBEDDED HSS ROOF FRAMING

1/8" = 1'-0"

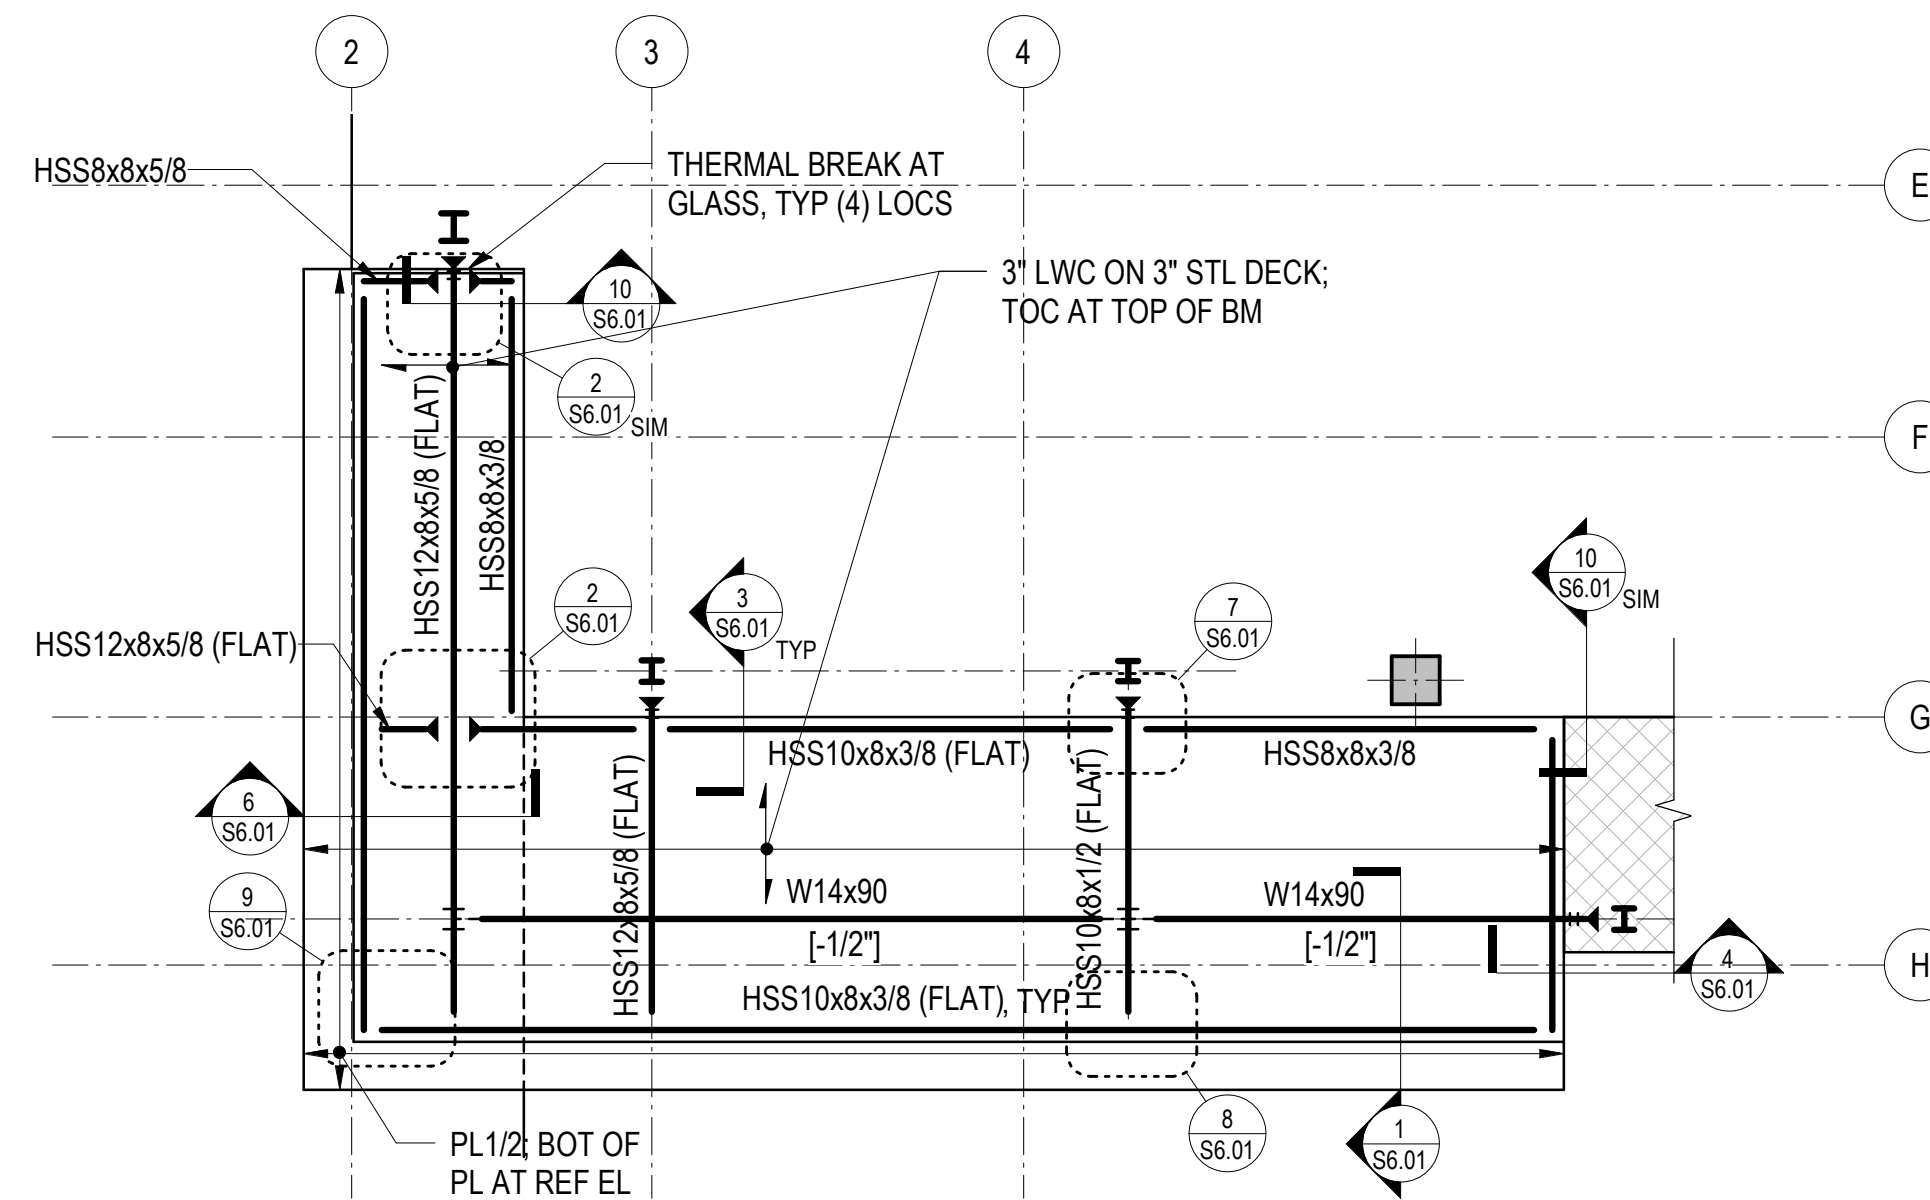

### 11 PARTIAL PLAN - TYPE 2A BALCONY

1/8" = 1'-0"

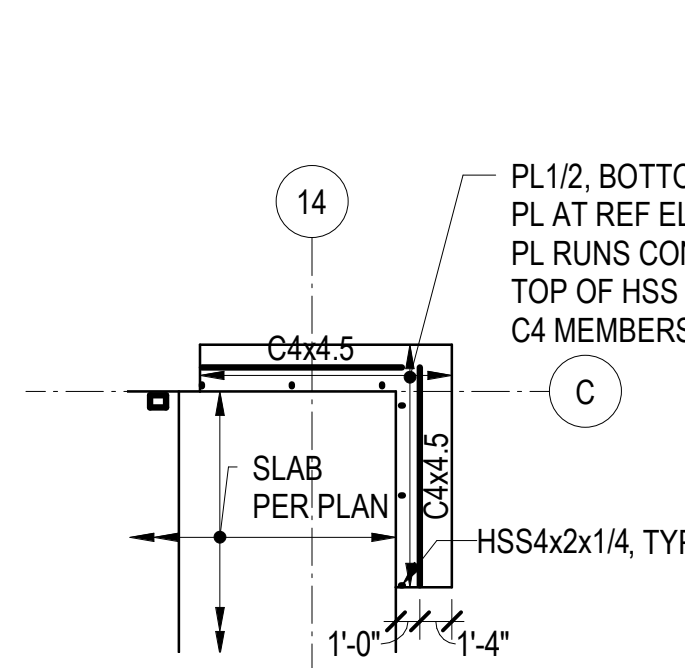


#### NOTES

- REFERENCE FLOOR ELEVATIONS ARE:  
TOWER A LEVEL 4: 8383'-0"  
TOWER A LEVEL 6: 8407'-6"
- TOP OF STEEL IS AT THE REFERENCE FLOOR ELEVATION UNLESS NOTED OTHERWISE.
- SEE ARCHITECTURAL DETAILS FOR ADDITIONAL INFORMATION.

### 17 PARTIAL PLAN - TOWER A EAST SUNSHADES

1/8" = 1'-0"

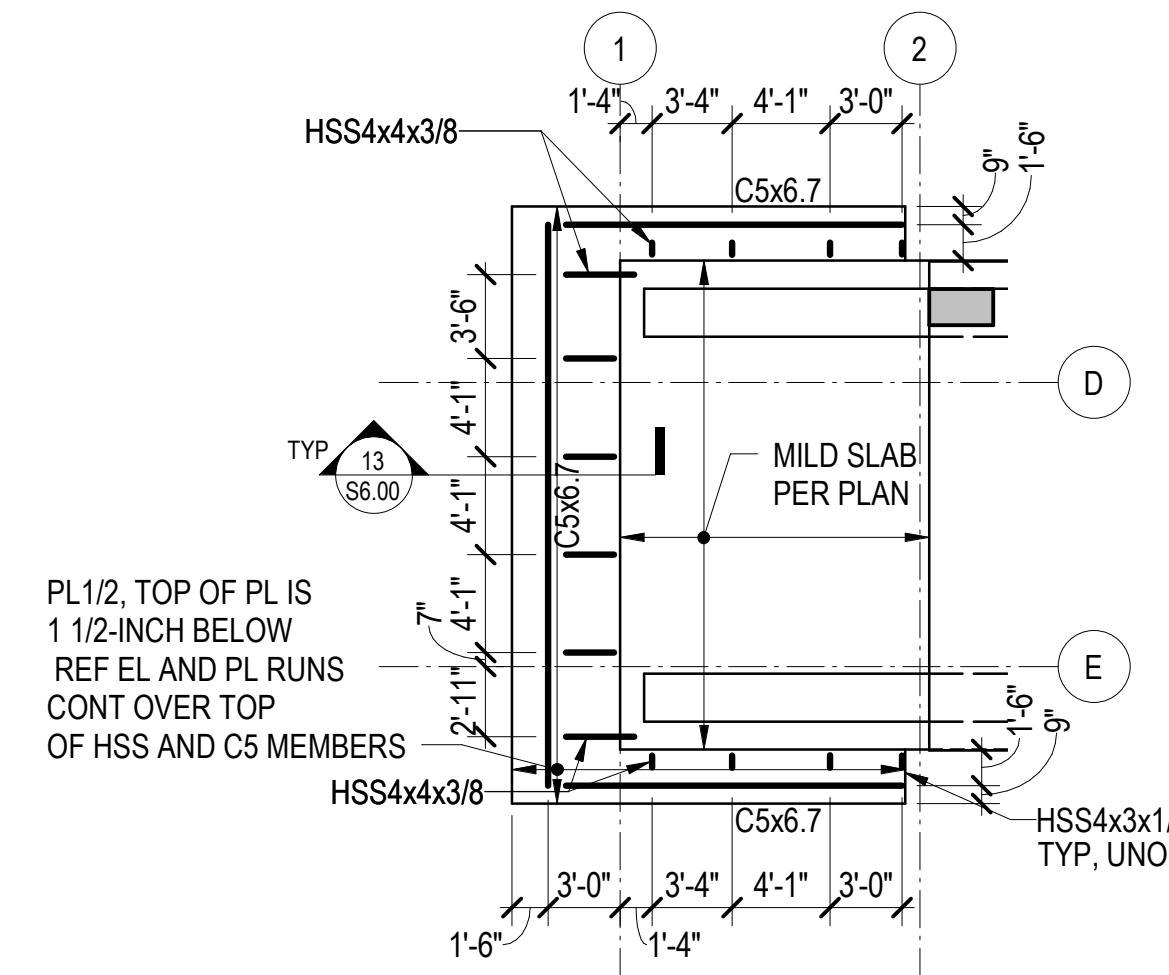


#### NOTES

- REFERENCE FLOOR ELEVATIONS ARE:  
TOWER A LEVEL 3: 8371'-0"  
TOWER A LEVEL 5: 8393'-6"
- SEE ARCHITECTURAL DETAILS FOR ADDITIONAL INFORMATION.

### 18 PARTIAL PLAN - TOWER A SUNSHADES

1/8" = 1'-0"

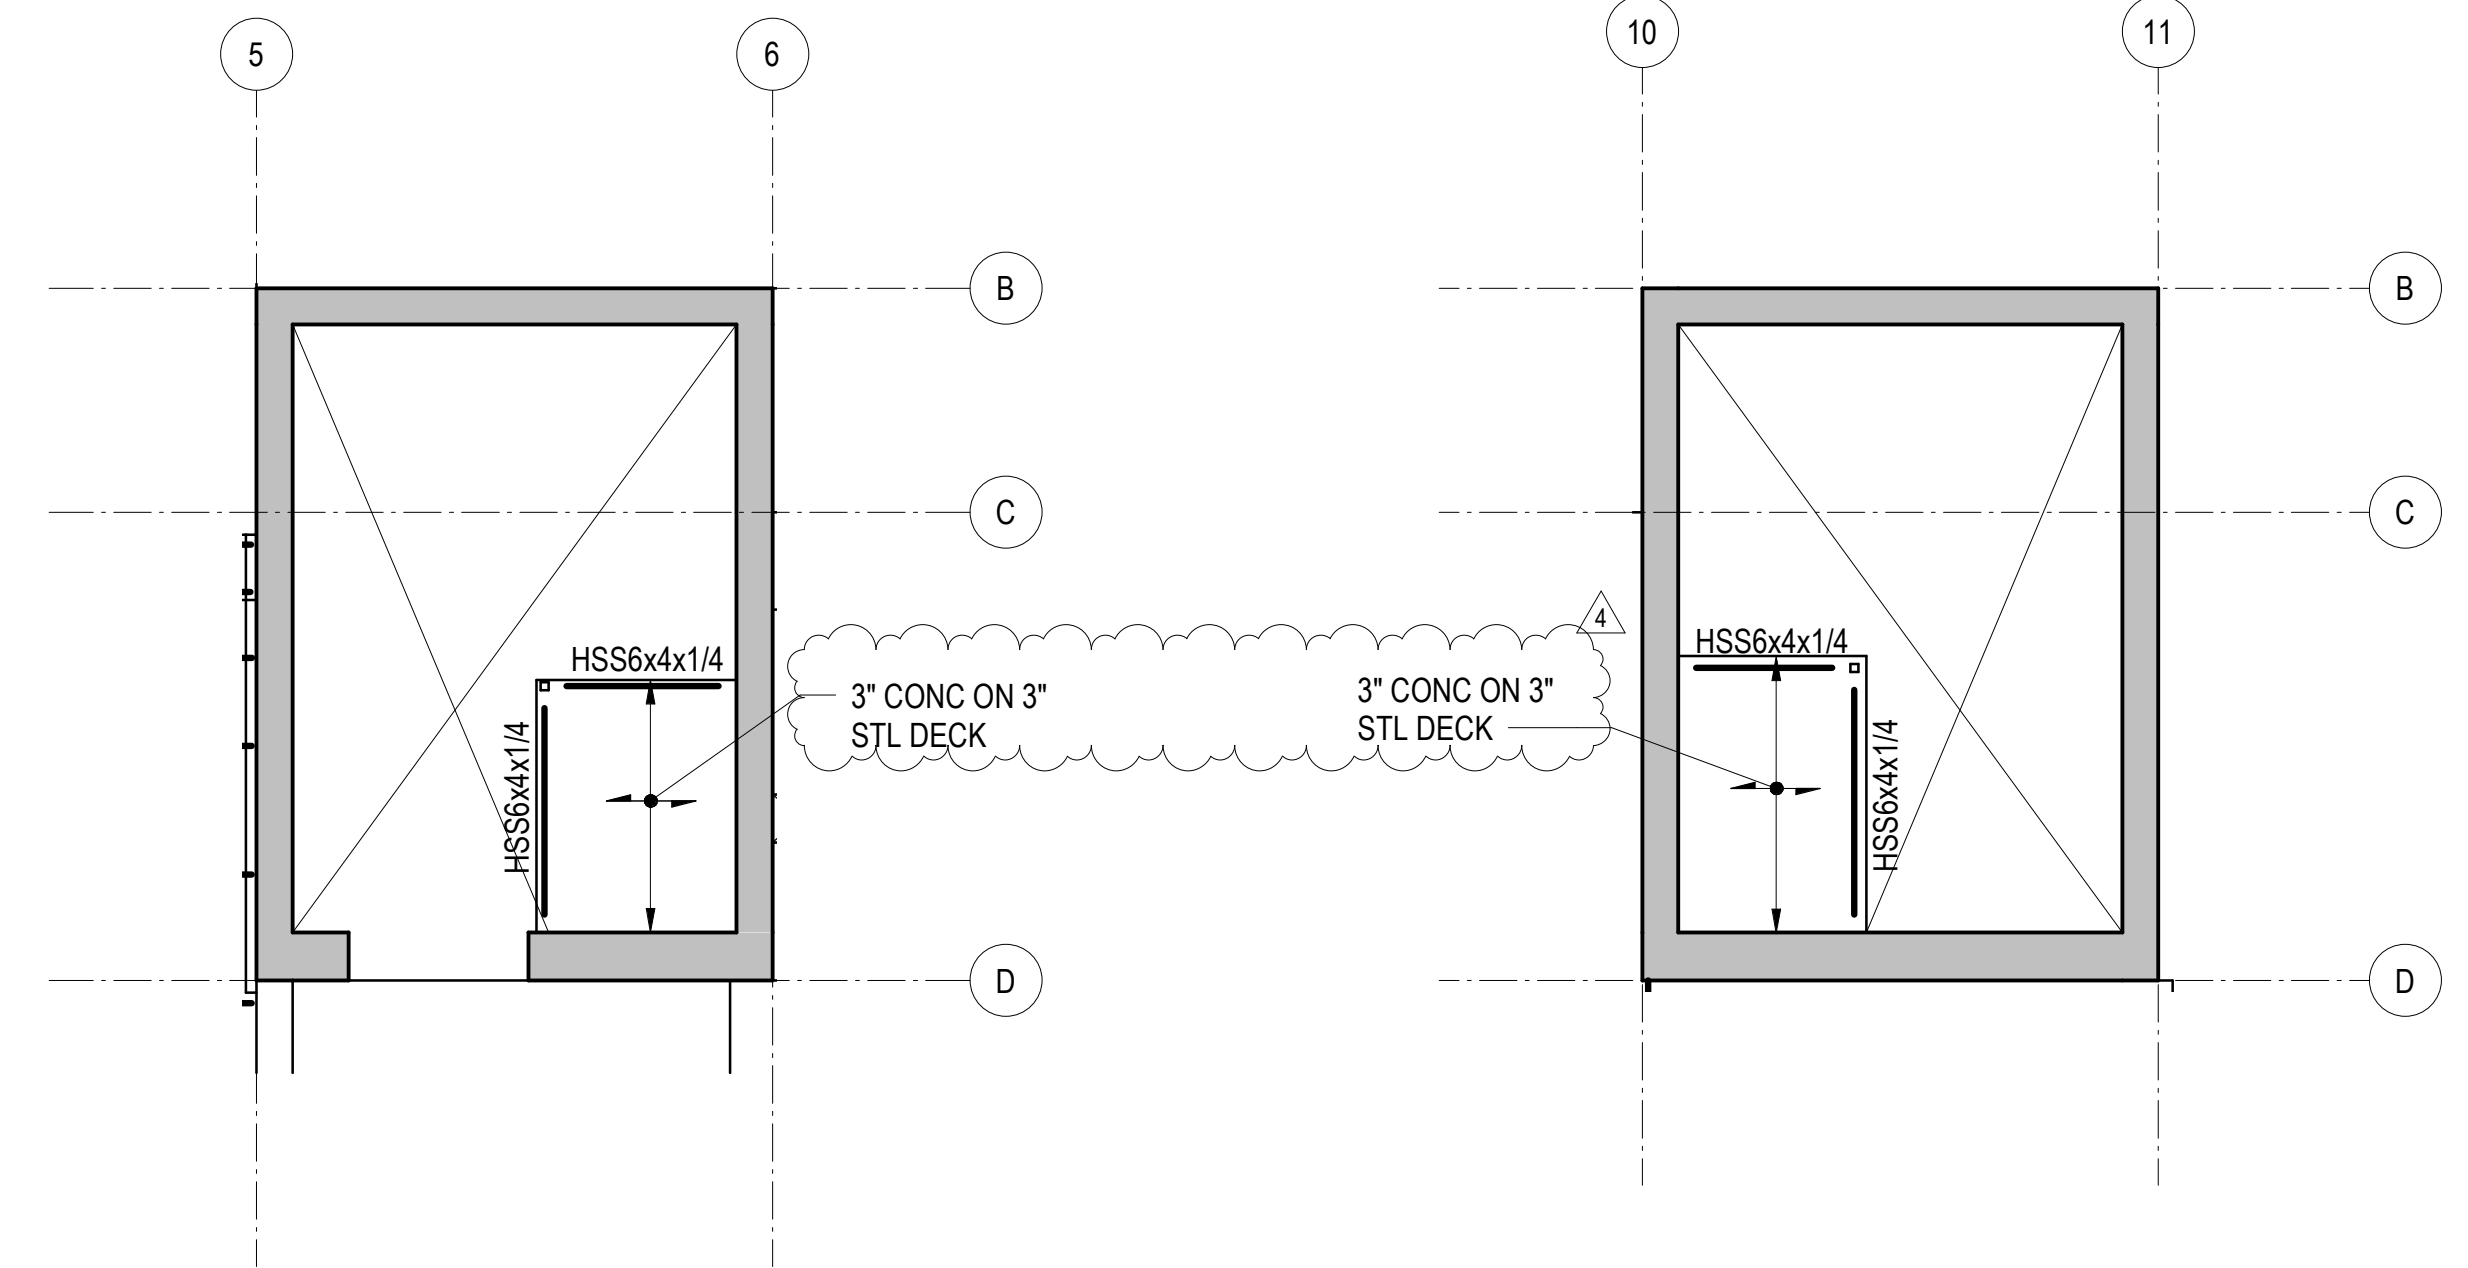


#### NOTES

- REFERENCE FLOOR ELEVATION IS 8410'-10". REFERENCE TOP OF STRUCTURAL STEEL IS 6-INCHES BELOW THE REFERENCE FLOOR ELEVATION, TYPICAL UNLESS NOTED OTHERWISE.
- STRUCTURAL SLAB IS 3-INCHES OF CONCRETE ON 3-INCH COMPOSITE STEEL DECK UNLESS NOTED OTHERWISE. REINFORCE WITH WWR 6x6-W2.9xW2.9. SEE TYPICAL SLAB ON STEEL DECK DETAILS FOR REINFORCING AND OTHER INFORMATION. REINFORCING SHOWN ON THE PLAN AND IN THE TYPICAL DETAILS IS IN ADDITION TO THIS REINFORCING.

### 9 PARTIAL PLAN - WEST CORE ELEV OVERRUN

1/8" = 1'-0"

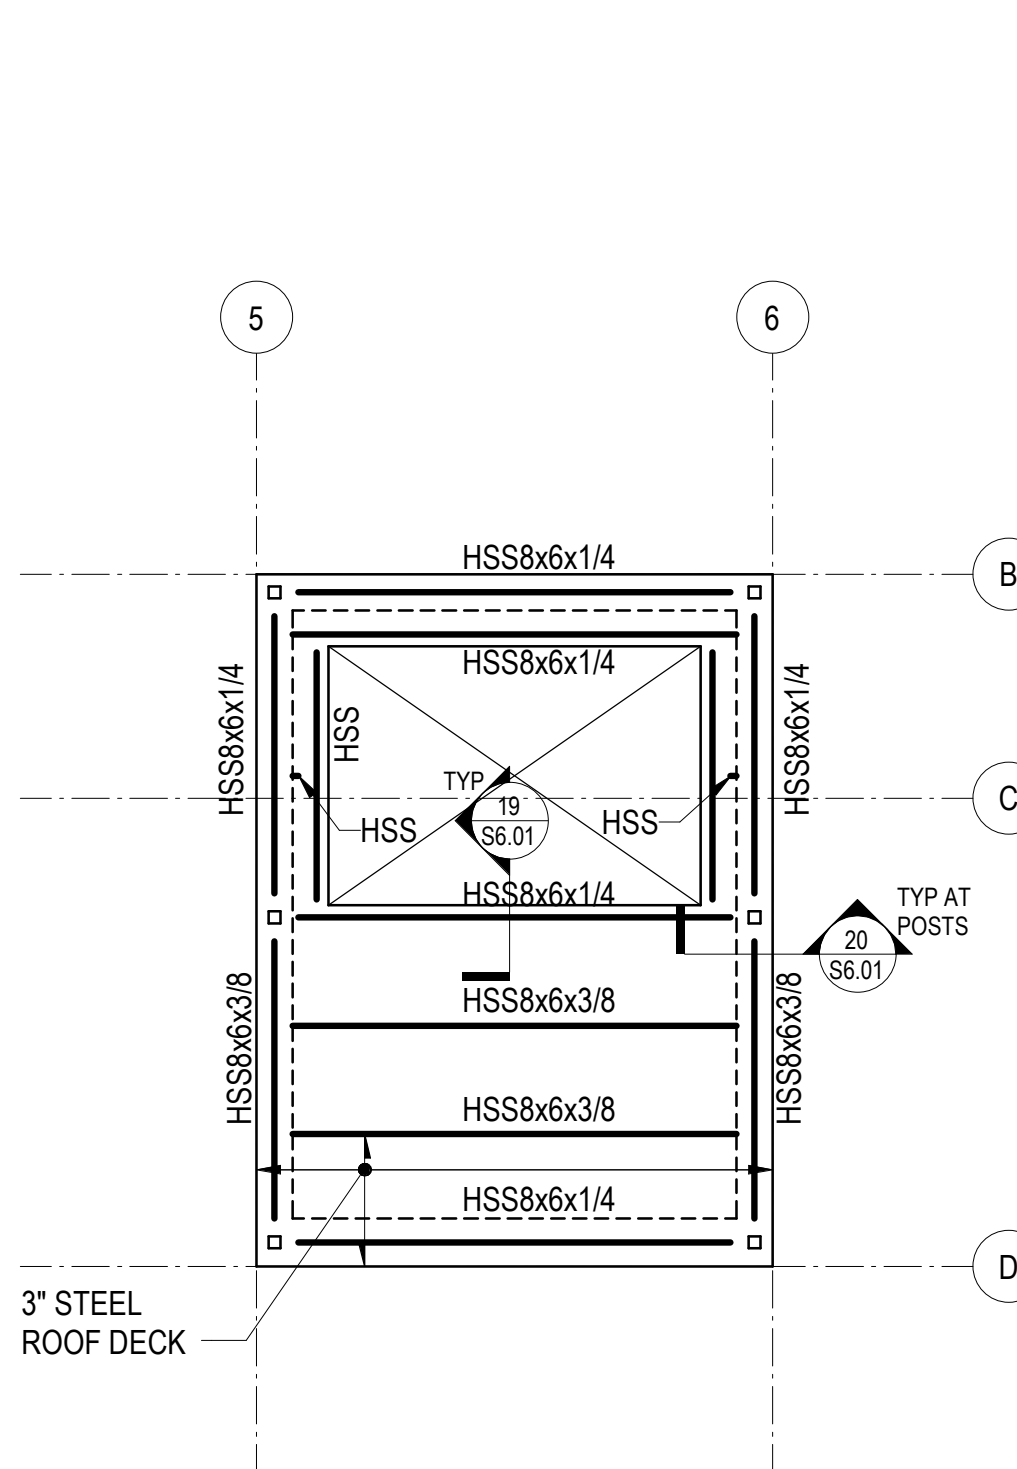

#### NOTES

- REFERENCE FLOOR ELEVATION IS 8423'-3". REFERENCE TOP OF STRUCTURAL STEEL IS AT THE REFERENCE FLOOR ELEVATION, TYPICAL UNLESS NOTED OTHERWISE.
- ROOF DECK IS MINIMUM 3-INCH x 20 GAUGE STEEL DECKING. TOP OF DECK IS AT TOP OF STEEL UNLESS NOTED OTHERWISE.

### 19 PARTIAL PLAN - TOP OF WEST CORE


1/8" = 1'-0"

#### NOTES

- REFERENCE FLOOR ELEVATION IS 8423'-8". REFERENCE TOP OF STRUCTURAL STEEL IS 6-INCHES BELOW THE REFERENCE FLOOR ELEVATION, TYPICAL UNLESS NOTED OTHERWISE.
- STRUCTURAL SLAB IS 3-INCHES OF CONCRETE ON 3-INCH COMPOSITE STEEL DECK UNLESS NOTED OTHERWISE. REINFORCE WITH WWR 6x6-W2.9xW2.9. SEE TYPICAL SLAB ON STEEL DECK DETAILS FOR REINFORCING AND OTHER INFORMATION. REINFORCING SHOWN ON THE PLAN AND IN THE TYPICAL DETAILS IS IN ADDITION TO THIS REINFORCING.

### 10 PARTIAL PLAN - EAST CORE ELEV OVERRUN

1/8" = 1'-0"

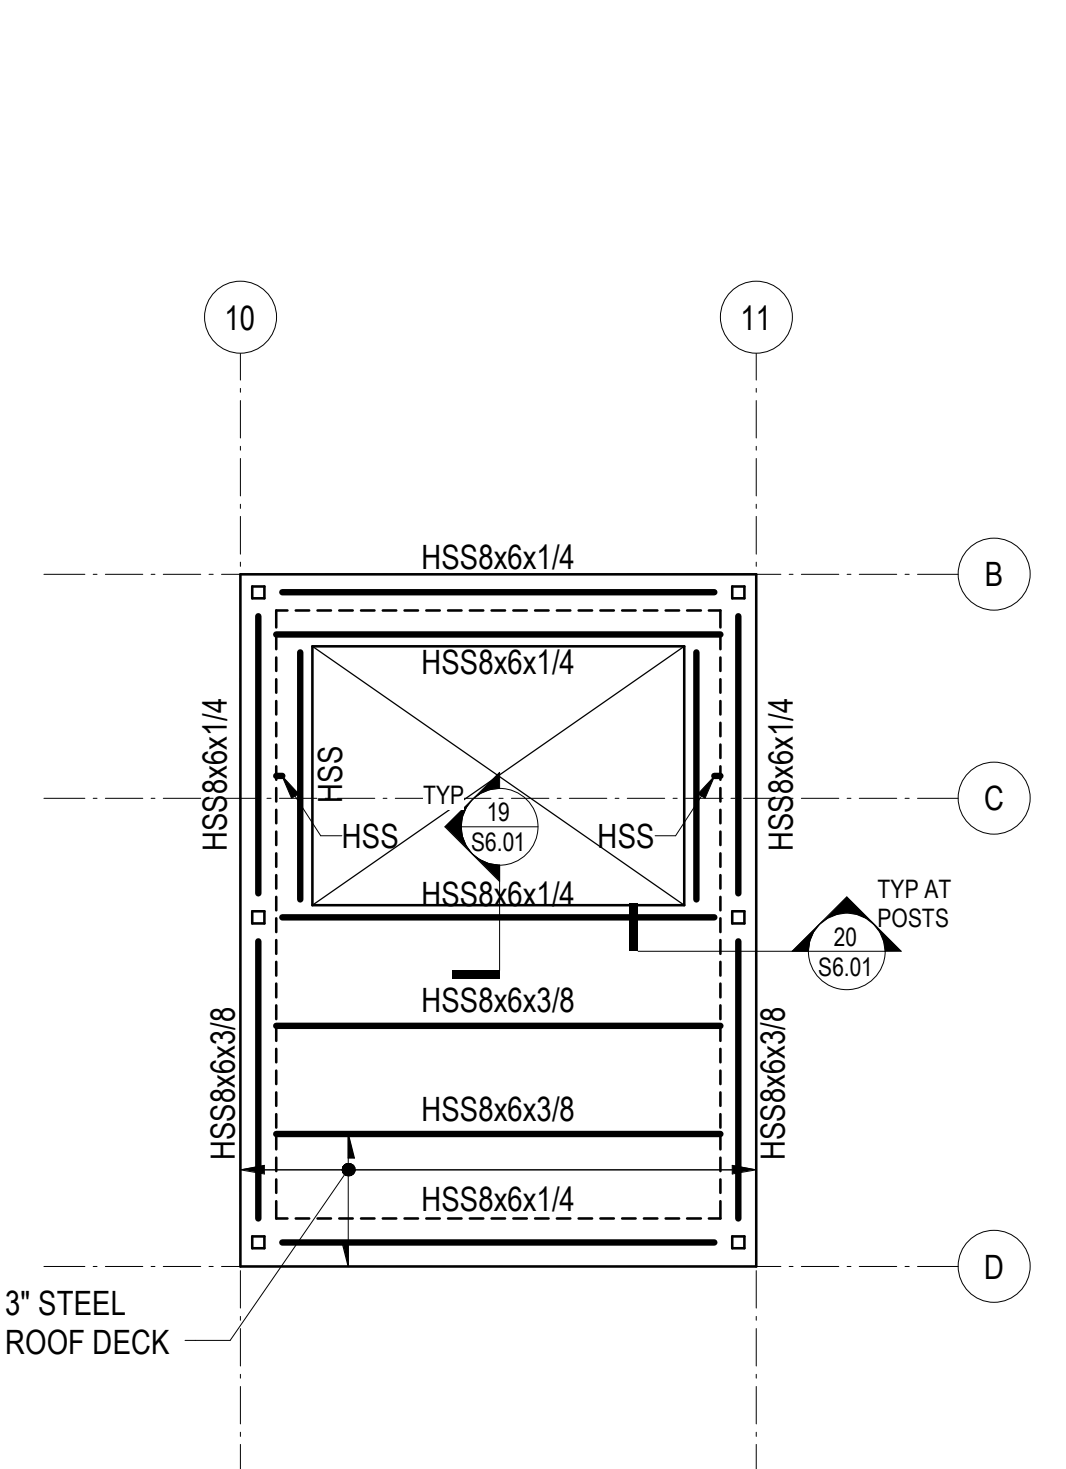


#### NOTES

- REFERENCE FLOOR ELEVATION IS 8429'-9". REFERENCE TOP OF STRUCTURAL STEEL IS AT THE REFERENCE FLOOR ELEVATION, TYPICAL UNLESS NOTED OTHERWISE.
- ROOF DECK IS MINIMUM 3-INCH x 20 GAUGE STEEL DECKING. TOP OF DECK IS AT TOP OF STEEL UNLESS NOTED OTHERWISE.

### 20 PARTIAL PLAN - TOP OF EAST CORE

1/8" = 1'-0"

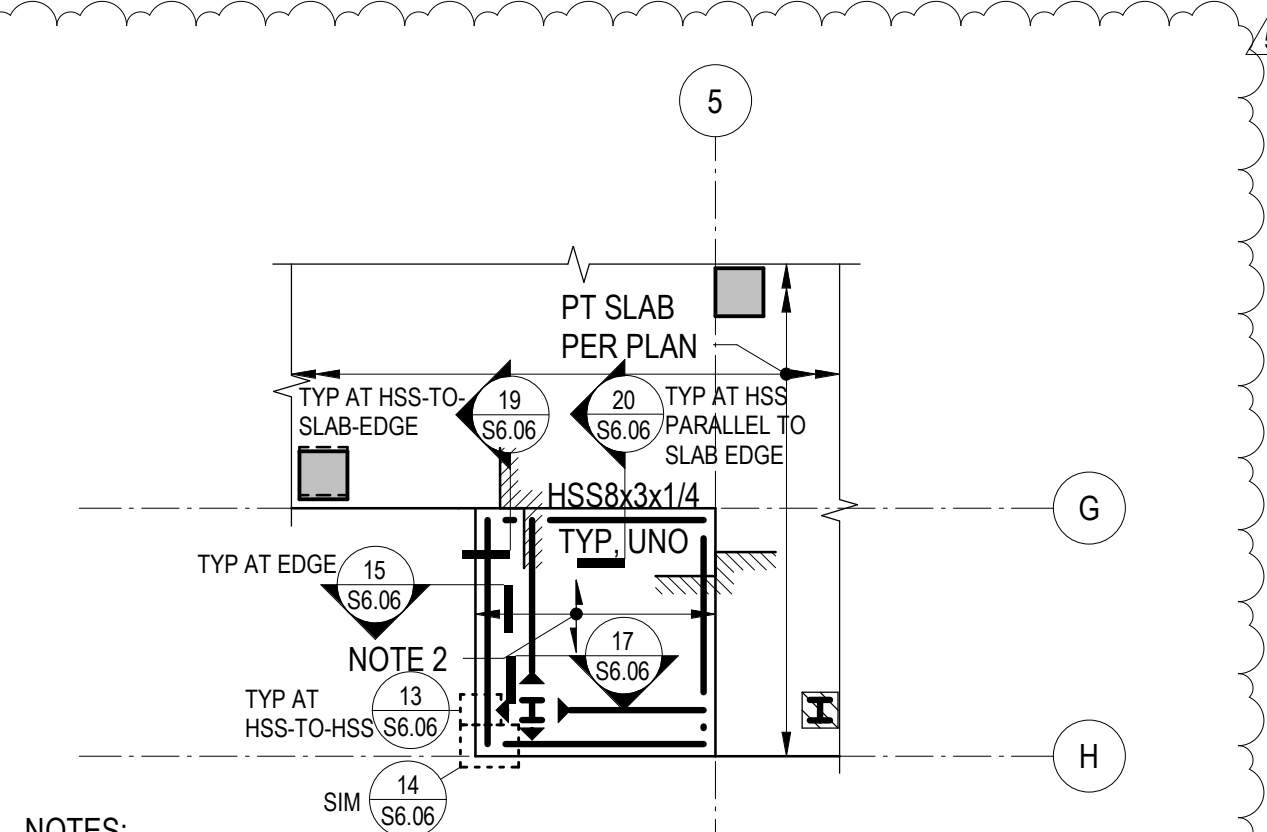


#### NOTES

- SEE RELEVANT PLANS FOR REFERENCE ELEVATION. TOP OF STEEL IS AT BOTTOM OF DECK UNLESS NOTED OTHERWISE.
- STRUCTURAL SLAB IS 3-INCHES OF CONCRETE ON 3-INCH COMPOSITE STEEL DECK UNLESS NOTED OTHERWISE. REINFORCE WITH WWR 6x6-W2.9xW2.9. SEE TYPICAL SLAB ON STEEL DECK DETAILS FOR REINFORCING AND OTHER INFORMATION. REINFORCING SHOWN ON THE PLAN AND IN THE TYPICAL DETAILS IS IN ADDITION TO THIS REINFORCING.

### 6 PARTIAL PLAN - TYPE 1A BALCONY

1/8" = 1'-0"

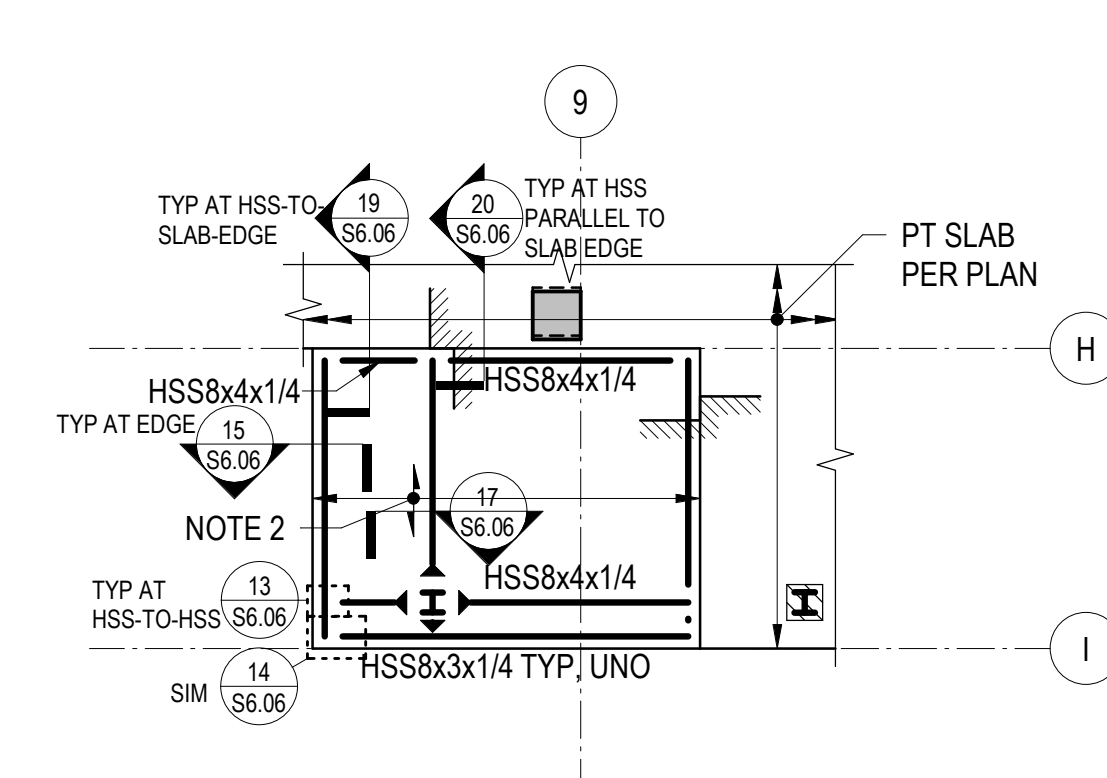


#### NOTES

- SEE RELEVANT PLANS FOR REFERENCE ELEVATION. TOP OF STEEL IS AT BOTTOM OF DECK UNLESS NOTED OTHERWISE.
- STRUCTURAL SLAB IS 3-INCHES OF CONCRETE ON 3-INCH COMPOSITE STEEL DECK UNLESS NOTED OTHERWISE. REINFORCE WITH WWR 6x6-W2.9xW2.9. SEE TYPICAL SLAB ON STEEL DECK DETAILS FOR REINFORCING AND OTHER INFORMATION. REINFORCING SHOWN ON THE PLAN AND IN THE TYPICAL DETAILS IS IN ADDITION TO THIS REINFORCING.

### 11 PARTIAL PLAN - TYPE 2A BALCONY

1/8" = 1'-0"

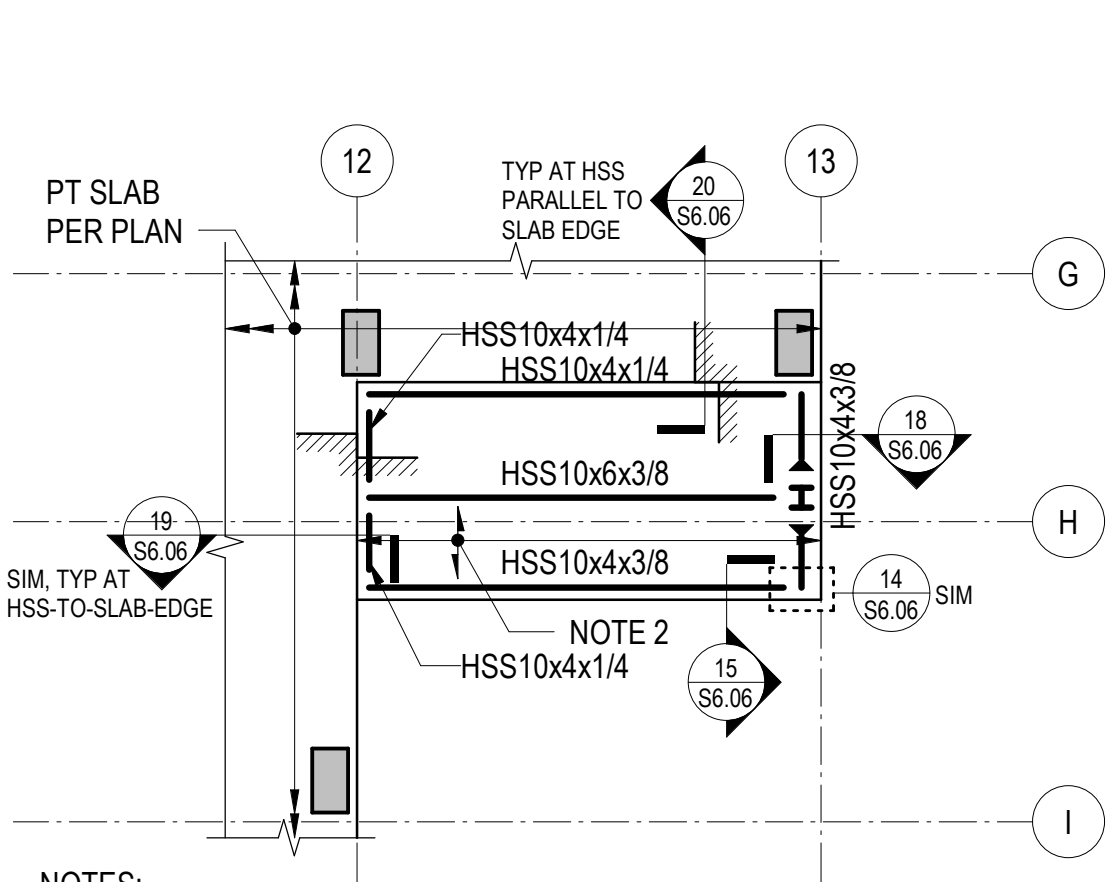


#### NOTES

- SEE RELEVANT PLANS FOR REFERENCE ELEVATION. TOP OF STEEL IS AT BOTTOM OF DECK UNLESS NOTED OTHERWISE.
- STRUCTURAL SLAB IS 3-INCHES OF CONCRETE ON 3-INCH COMPOSITE STEEL DECK UNLESS NOTED OTHERWISE. REINFORCE WITH WWR 6x6-W2.9xW2.9. SEE TYPICAL SLAB ON STEEL DECK DETAILS FOR REINFORCING AND OTHER INFORMATION. REINFORCING SHOWN ON THE PLAN AND IN THE TYPICAL DETAILS IS IN ADDITION TO THIS REINFORCING.

### 16 PARTIAL PLAN - TYPE 3A BALCONY

1/8" = 1'-0"





159 South Jackson St, Suite 600  
Seattle, Washington 98104 USA  
+1 206 624 5670 [olsonkundig.com](mailto:olsonkundig.com)

**SOMMET BLANC - ABC**  
DEER VALLEY, UTAH

[illegible]

/17/2024


**S2.B.03**



S0.XX	DRAWING INDEX, ABBREVIATIONS, LEGENDS, GENERAL NOTES
S1.XX	LOAD DIAGRAMS
S2.XX	PLANS
S3.XX	ELEVATIONS
S4.XX	TYPICAL DETAILS AND SCHEDULES
S5.XX	CONCRETE SECTIONS AND DETAILS
S6.XX	STEEL SECTIONS AND DETAILS

1. REFERENCE FLOOR ELEVATION IS 8345' - 0". TOP OF CONCRETE SLAB IS AT THE REFERENCE ELEVATION UNLESS NOTED OTHERWISE. SEE ARCHITECTURAL DRAWINGS FOR DRAINAGE SLOPES NOT SHOWN.
2. THE STRUCTURAL SLAB IS A 14-INCH THICK MID-TWO-WAY SLAB UNLESS NOTED OTHERWISE. SEE THE TYPICAL MID-SLAB DETAILS.
3. CONCRETE PLACED IN THE SLAB/SHEAR WALL INTERSECTION, INCLUDING COUPLING BEAMS, SHALL HAVE MINIMUM CONCRETE STRENGTH EQUAL TO THAT SPECIFIED FOR THE SHEAR WALLS.
4. CONCRETE PLACED IN THE SLAB/COLUMN INTERSECTION SHALL HAVE MINIMUM CONCRETE STRENGTH AS SHOWN IN THE GENERAL NOTES, BUT NO LESS THAN THAT SPECIFIED FOR THE COLUMNS DIVIDED BY 1.4.
5. COORDINATE LOCATION OF ALL EMBEDS WITH MECHANICAL, ELECTRICAL, PLUMBING, AND EXTERIOR WALL SYSTEMS PRIOR TO CASTING THE SLAB.
6. SEE ARCHITECTURAL, MECHANICAL, PLUMBING, ELECTRICAL, AND OTHER DISCIPLINES DRAWINGS FOR OPENING SIZES AND LOCATIONS NOT SHOWN ON PLAN. SEE "TYPICAL OPENINGS AND EMBEDMENTS IN CONCRETE" DETAILS FOR OPENING PLACEMENT CRITERIA. NOTIFY THE STRUCTURAL ENGINEER OF ANY OPENINGS NOT SHOWN ON THE STRUCTURAL DRAWINGS FOR WHICH THE TYPICAL DETAILS DO NOT APPLY.


- 












Reserved for permit stamp

150 South Jackson St., Suite 600  
Seattle, Washington 98104 USA  
+1 206 624 9770 olsonkundig.com

Olson Kundig

project:  
SOMMET BLANC - ABC  
DEER VALLEY, UTAH

MAGNUSSON  
KLEMENCIC  
ASSOCIATES  
Structural + Civil Engineers  
Seattle Chicago  
www.mka.com  
206.292.1200

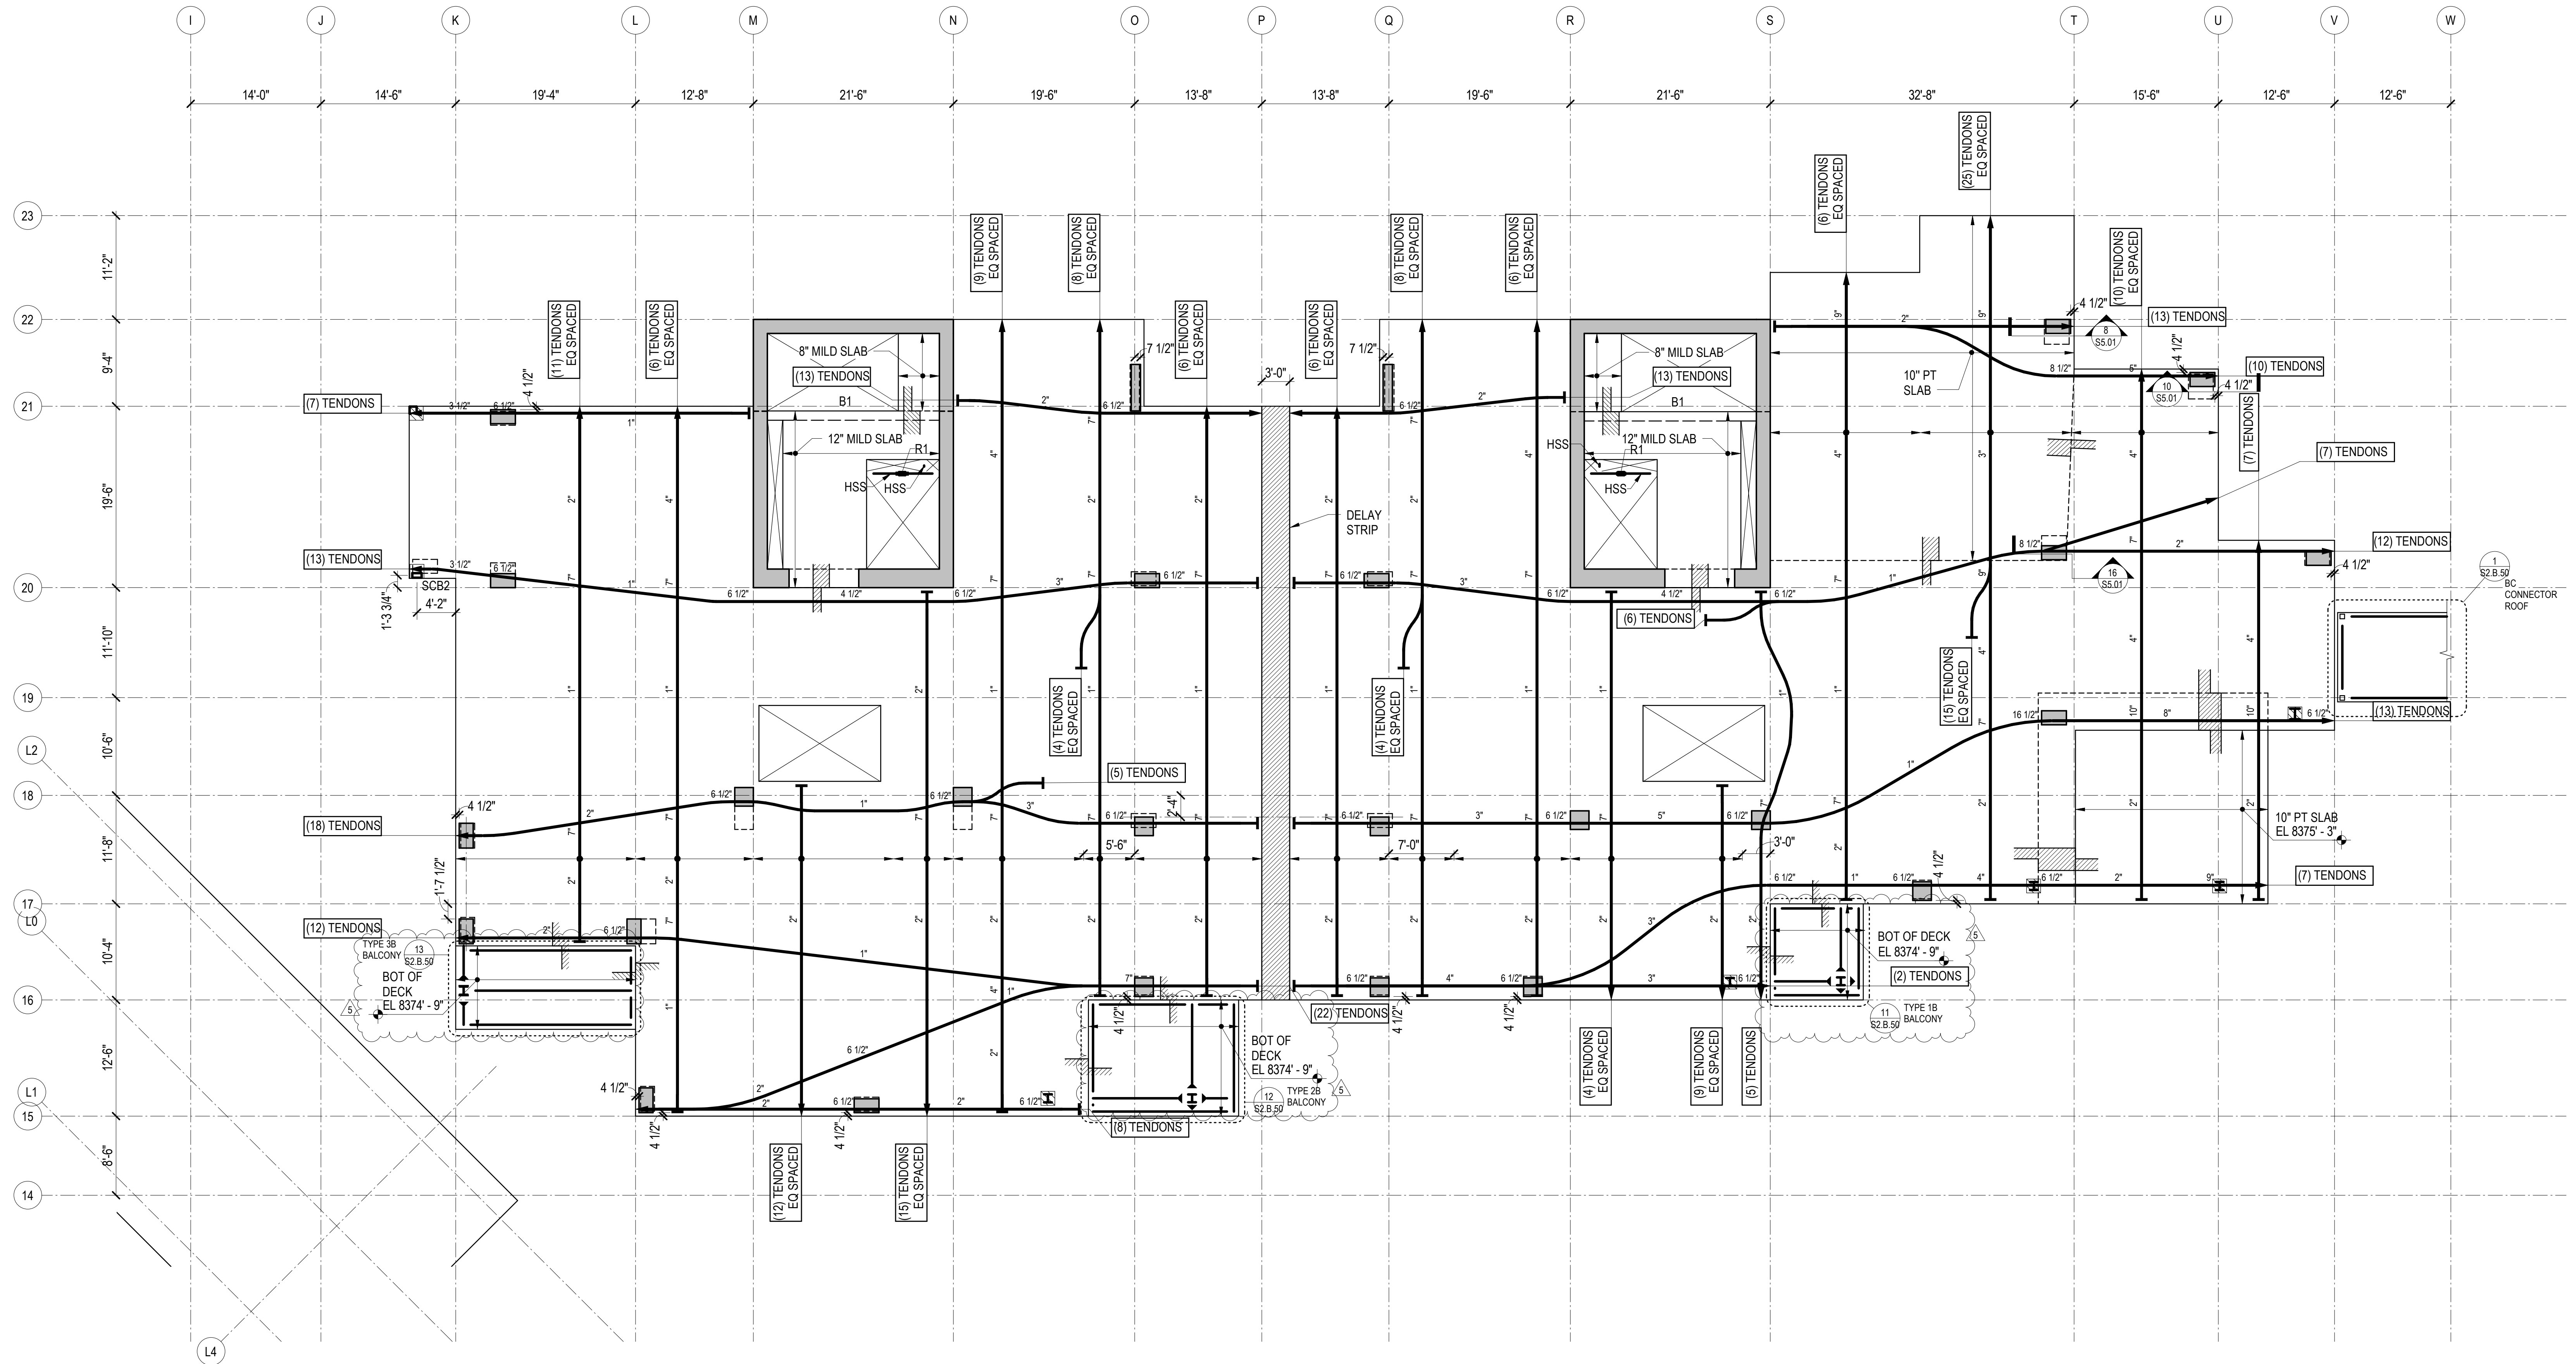

1 TOWER B - LEVEL 2 FRAMING PLAN  
1/8" = 1'-0"



REFERENCE DRAWINGS

S0.XX DRAWING INDEX, ABBREVIATIONS, LEGENDS, GENERAL NOTES  
S1.XX LOAD DIAGRAMS  
S2.XX PLANS  
S3.XX ELEVATIONS  
S4.XX TYPICAL DETAILS AND SCHEDULES  
S5.XX CONCRETE SECTIONS AND DETAILS  
S6.XX STEEL SECTIONS AND DETAILS

NOTES

- REFERENCE FLOOR ELEVATION IS 8376' - 0". TOP OF STRUCTURAL CONCRETE SLAB IS 8375' - 11" UNLESS NOTED OTHERWISE. SEE ARCHITECTURAL DRAWINGS FOR DRAINAGE SLOPES NOT SHOWN.
- STRUCTURAL SLAB IS AN 8-INCH THICK UNBONDED POST-TENSIONED TWO-WAY SLAB UNLESS NOTED OTHERWISE. SEE TYPICAL POST-TENSIONED SLAB DETAILS FOR ADDITIONAL INFORMATION.
- THE MINIMUM NUMBER OF REQUIRED POST-TENSIONING TENDONS IS SHOWN ON THE DRAWINGS. FINAL COUNT, LAYOUT, AND LIVE END LOCATION IS PER DEFERRED DESIGN-BUILD SUBMITTAL PROVIDED BY THE CONTRACTOR.
- CONCRETE PLACED IN THE SLAB/SHEAR WALL INTERSECTION, INCLUDING COUPLING BEAMS, SHALL HAVE MINIMUM CONCRETE STRENGTH EQUAL TO THAT SPECIFIED FOR THE SHEAR WALLS.
- CONCRETE PLACED IN THE SLAB/COLUMN INTERSECTION SHALL HAVE MINIMUM CONCRETE STRENGTH AS SHOWN IN THE GENERAL NOTES, BUT NO LESS THAN THAT SPECIFIED FOR THE COLUMNS DIVIDED BY 1.4.
- COORDINATE LOCATION OF ALL EMBEDS WITH MECHANICAL, ELECTRICAL, PLUMBING, AND EXTERIOR WALL SYSTEMS PRIOR TO CASTING THE SLAB.

- SEE ARCHITECTURAL, MECHANICAL, PLUMBING, ELECTRICAL, AND OTHER DISCIPLINES DRAWINGS FOR OPENING SIZES AND LOCATIONS NOT SHOWN ON PLAN. SEE "TYPICAL OPENINGS AND EMBEDMENTS IN CONCRETE" DETAILS FOR OPENING PLACEMENT CRITERIA. NOTIFY THE STRUCTURAL ENGINEER OF ANY OPENINGS NOT SHOWN ON THE STRUCTURAL DRAWINGS FOR WHICH THE TYPICAL DETAILS DO NOT APPLY.
- REFERENCE ALL CONSTRUCTION DOCUMENTS FOR SIZE, EXTENT, AND LOCATION OF CONCRETE CURBS, HOUSEKEEPING PADS, CMU WALLS, PLANTER WALLS, BOLLARDS, AND EDGE ANGLES. REINFORCE PER THE TYPICAL DETAILS.
- INDICATES POUR STRIPS. WAIT 28 DAYS MINIMUM AFTER PLACING SLAB CONCRETE PRIOR TO CASTING POUR STRIPS. SEE "TYPICAL POST-TENSIONED DELAY STRIP" DETAIL FOR MORE INFORMATION.

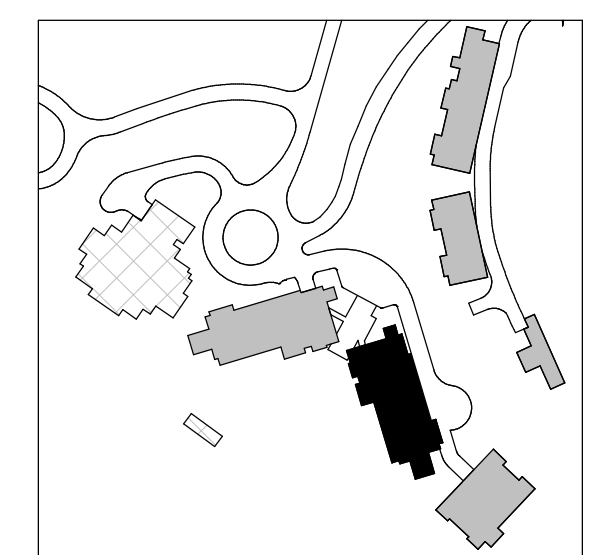

principal architect \_\_\_\_\_  
project manager \_\_\_\_\_  
drawn by \_\_\_\_\_  
checked by \_\_\_\_\_  
job no. 20052  
date 05/17/2024

revisions:

5	01/07/2025	ASL-007
3	9/19/2024	ASL-004
	04/08/2024	IFC SET 1 OF 3
	11/18/2022	95% CD
no.	date	by


IFC SET 2 OF 3

05/17/2024

TOWER B LEVEL 2  
FRAMING PLAN

S2.B.12






**SOMMET BLANC - ABC**  
DEER VALLEY, UTAH


Seattle Chicago  
www.mika.com  
206 292 1200

S2.B.12.R




1. SEE "GENERAL NOTES" FOR REINFORCING REQUIREMENTS.
2. SEE "TYPICAL POST-TENSIONED SLAB DETAILS" FOR ADDITIONAL INFORMATION.
3. SLAB REINFORCING SHALL BE PLACED IN THE FOLLOWING SEQUENCE:  
 BOT BARS IN DIRECTION OF DISTRIBUTED TENDONS  
 BOT BARS IN DIRECTION OF BANDED TENDONS  
 TOP BARS IN DIRECTION OF BANDED TENDONS  
 TOP BARS IN DIRECTION OF DISTRIBUTED TENDONS
4. (RX) INDICATES STUD RAIL. STUD RAILS SHALL BE PLACED AT ALL COLUMNS. SEE "TYPICAL STUD RAIL REINFORCEMENT AT COLUMNS" DETAIL AND STUD RAIL SCHEDULE.
5. SEE "TYPICAL CONCRETE OPENINGS AND EMBEDMENTS" FOR ADDITIONAL REINFORCEMENT REQUIREMENTS. NOTIFY STRUCTURAL ENGINEER OF ANY OPENINGS NOT SHOWN ON THE STRUCTURAL DRAWINGS FOR WHICH THE TYPICAL DETAILS DO NOT APPLY. ADDITIONAL REINFORCEMENT MAY BE REQUIRED.
6. WHERE BAR LENGTH CANNOT BE ACHIEVED DUE TO SLAB EDGE, HOOK BAR.
7. WHERE NOTES AS "HOOKED", PROVIDE 90 OR 180 DEGREE HOOK AS SHOWN ON PLAN. NOTED BAR LENGTH IS LENGTH OF STRAIGHT PORTION OF BAR.
8. PROVIDE INTEGRITY BOTTOM BARS PER STUD RAIL SCHEDULE AT ALL COLUMNS. CENTER REINFORCEMENT ON COLUMN AND PLACE INTEGRITY BARS EACH WAY WITHIN COLUMN VERTICAL REINFORCEMENT. TRIM AND HOOK AT SLAB EDGE AS REQUIRED.

PT TOP REINFORCEMENT SCHEDULE		
MARK	REINFORCING	REMARKS
PT50	(3) #5x5'-2"	HOOK AT END
PT51	(6) #5x6'-8"	HOOK AT END
PT52	(10) #5x9'-2"	HOOK AT END
PT53	(3) #5x6'-8"	HOOK AT END
PT54	(6) #5x14'-2"	HOOK AT END
PT55	(8) #5x14'-2"	HOOK AT END
PT56	(16) #5x11'-2"	HOOK AT END
PT57	(16) #5x14'-2"	HOOK AT END
PT58	(12) #5x6'-8" @ 12"	HOOK AT END
PT59	(14) #5x11'-2" @ 12"	HOOK AT END
PT60	#5x11'-2" @ 10"	HOOK AT END
PT81	#5x6'-8" @ 10"	HOOK AT END
PT82	#6x9'-0" @ 4"	HOOK AT END
PT83	#6x9'-0" @ 6"	HOOK AT END
PT84	#6x19'-2" @ 12"	HOOK AT END
PT85	#5x14'-2" @ 12"	HOOK AT END








Reserved for permit stamp

150 South Jackson St., Suite 800  
Seattle, Washington 98104 USA  
+1 206 624 9970 olsonkundig.com

Olson Kundig

project:  
SOMMET BLANC - ABC  
DEER VALLEY, UTAH

MAGNUSSON  
KLEMENCIC  
ASSOCIATES  
Structural + Civil Engineers  
Seattle Chicago  
www.mka.com  
206.292.1200

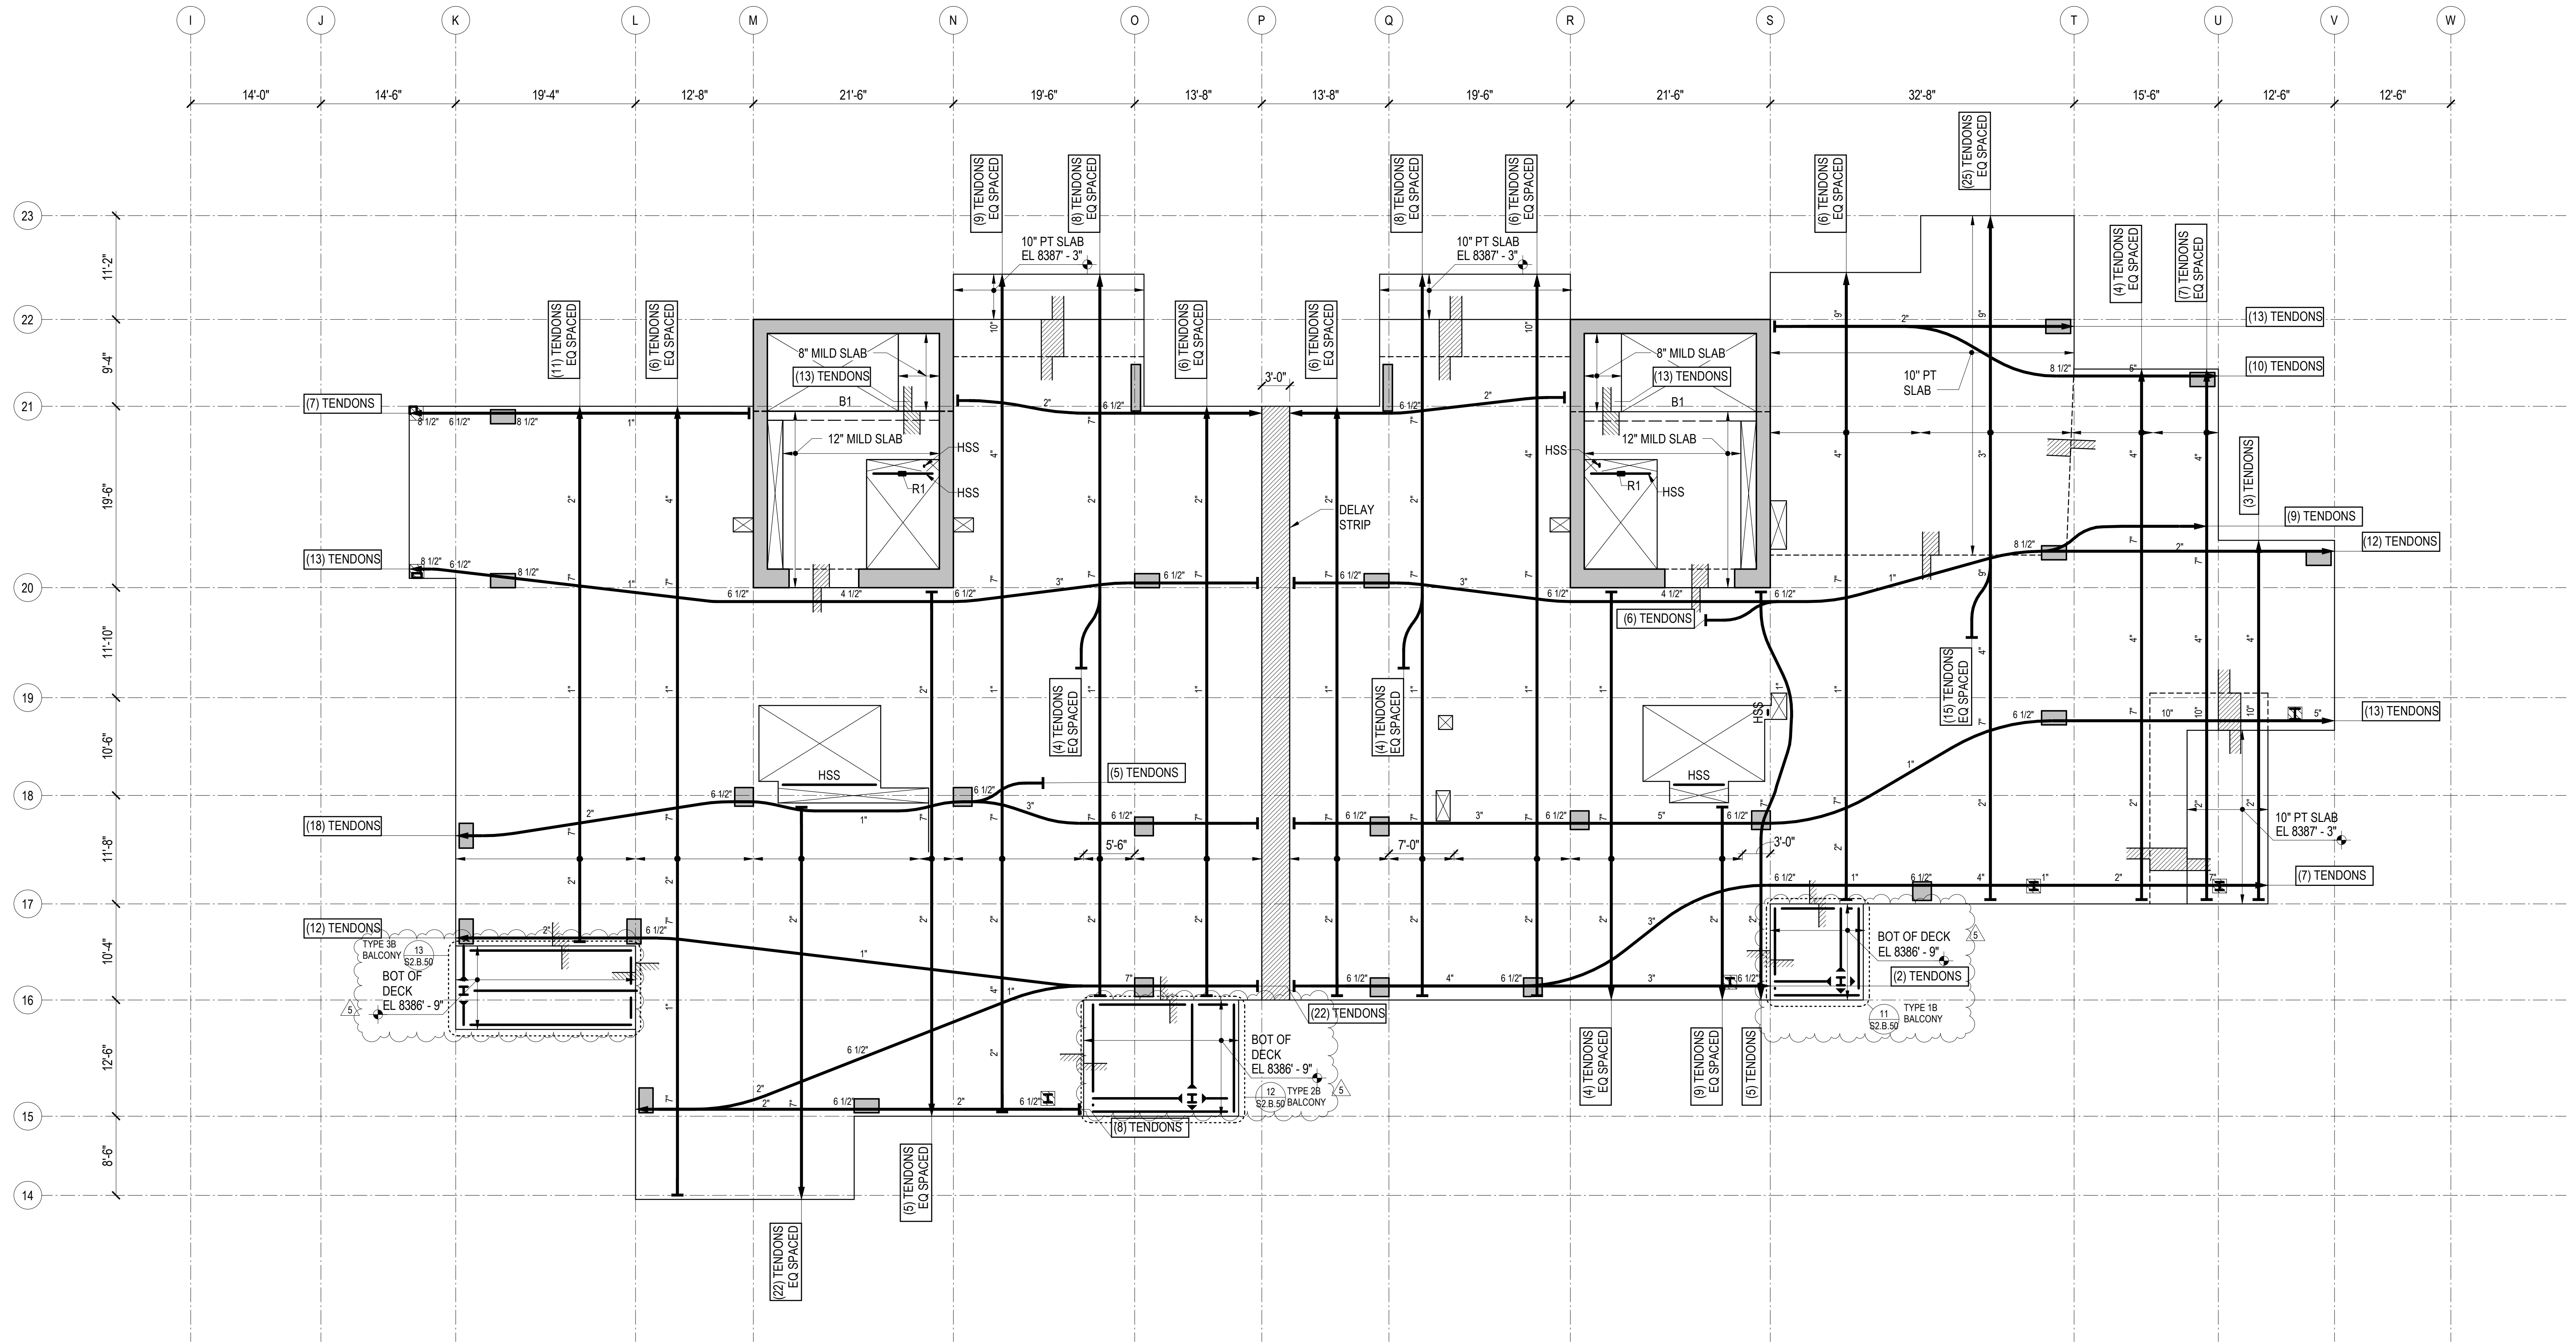

1 TOWER B - LEVEL 3 FRAMING PLAN  
1/8" = 1'-0"



REFERENCE DRAWINGS

S0.XX DRAWING INDEX, ABBREVIATIONS, LEGENDS, GENERAL NOTES  
S1.XX LOAD DIAGRAMS  
S2.XX PLANS  
S3.XX ELEVATIONS  
S4.XX TYPICAL DETAILS AND SCHEDULES  
S5.XX CONCRETE SECTIONS AND DETAILS  
S6.XX STEEL SECTIONS AND DETAILS

NOTES

- REFERENCE FLOOR ELEVATION IS 8388' - 0". TOP OF STRUCTURAL CONCRETE SLAB IS 8387' - 11" UNLESS NOTED OTHERWISE. SEE ARCHITECTURAL DRAWINGS FOR DRAINAGE SLOPES NOT SHOWN.
- STRUCTURAL SLAB IS AN 8-INCH THICK UNBONDED POST-TENSIONED TWO-WAY SLAB UNLESS NOTED OTHERWISE. SEE TYPICAL POST-TENSIONED SLAB DETAILS FOR ADDITIONAL INFORMATION.
- THE MINIMUM NUMBER OF REQUIRED POST-TENSIONING TENDONS IS SHOWN ON THE DRAWINGS. FINAL COUNT, LAYOUT, AND LIVE END LOCATION IS PER DEFERRED DESIGN-BUILD SUBMITTAL PROVIDED BY THE CONTRACTOR.
- CONCRETE PLACED IN THE SLAB/SHEAR WALL INTERSECTION, INCLUDING COUPLING BEAMS, SHALL HAVE MINIMUM CONCRETE STRENGTH EQUAL TO THAT SPECIFIED FOR THE SHEAR WALLS.
- CONCRETE PLACED IN THE SLAB/COLUMN INTERSECTION SHALL HAVE MINIMUM CONCRETE STRENGTH AS SHOWN IN THE GENERAL NOTES, BUT NO LESS THAN THAT SPECIFIED FOR THE COLUMNS DIVIDED BY 1.4.
- COORDINATE LOCATION OF ALL EMBEDS WITH MECHANICAL, ELECTRICAL, PLUMBING, AND EXTERIOR WALL SYSTEMS PRIOR TO CASTING THE SLAB.

- SEE ARCHITECTURAL, MECHANICAL, PLUMBING, ELECTRICAL, AND OTHER DISCIPLINES DRAWINGS FOR OPENING SIZES AND LOCATIONS NOT SHOWN ON PLAN. SEE "TYPICAL OPENINGS AND EMBEDMENTS IN CONCRETE" DETAILS FOR OPENING PLACEMENT CRITERIA. NOTIFY THE STRUCTURAL ENGINEER OF ANY OPENINGS NOT SHOWN ON THE STRUCTURAL DRAWINGS FOR WHICH THE TYPICAL DETAILS DO NOT APPLY.
- REFERENCE ALL CONSTRUCTION DOCUMENTS FOR SIZE, EXTENT, AND LOCATION OF CONCRETE CURBS, HOUSEKEEPING PADS, CMU WALLS, PLANTER WALLS, BOLLARDS, AND EDGE ANGLES. REINFORCE PER THE TYPICAL DETAILS.
- INDICATES POUR STRIPS. WAIT 28 DAYS MINIMUM AFTER PLACING SLAB CONCRETE PRIOR TO CASTING POUR STRIPS. SEE "TYPICAL POST-TENSIONED DELAY STRIP" DETAIL FOR MORE INFORMATION.

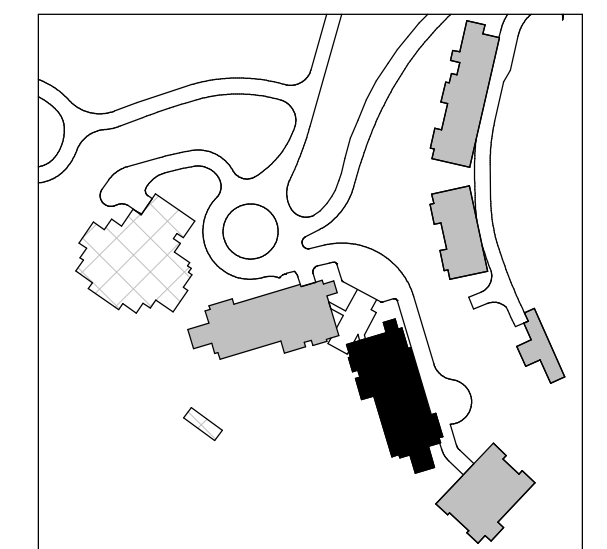

principal architect \_\_\_\_\_  
project manager \_\_\_\_\_  
drawn by \_\_\_\_\_  
checked by \_\_\_\_\_  
job no. 20052  
date 05/17/2024

revisions:

5	01/07/2025	ASJ-007
3	9/19/2024	ASJ-004
	04/08/2024	IFC SET 1 OF 3
	11/18/2022	95% CD
no.	date	by

IFC SET 2 OF 3

05/17/2024


TOWER B LEVEL 3  
FRAMING PLAN

S2.B.13










Reserved for permit stamp

150 South Jackson St., Suite 600  
Seattle, Washington 98104 USA  
+1 206 624 5970 olsonkundig.com

Olson Kundig

project:  
SOMMET BLANC - ABC  
DEER VALLEY, UTAH

MAGNUSSON  
KLEMENCIC  
ASSOCIATES  
Structural + Civil Engineers  
Seattle Chicago  
www.mka.com  
206.292.1200

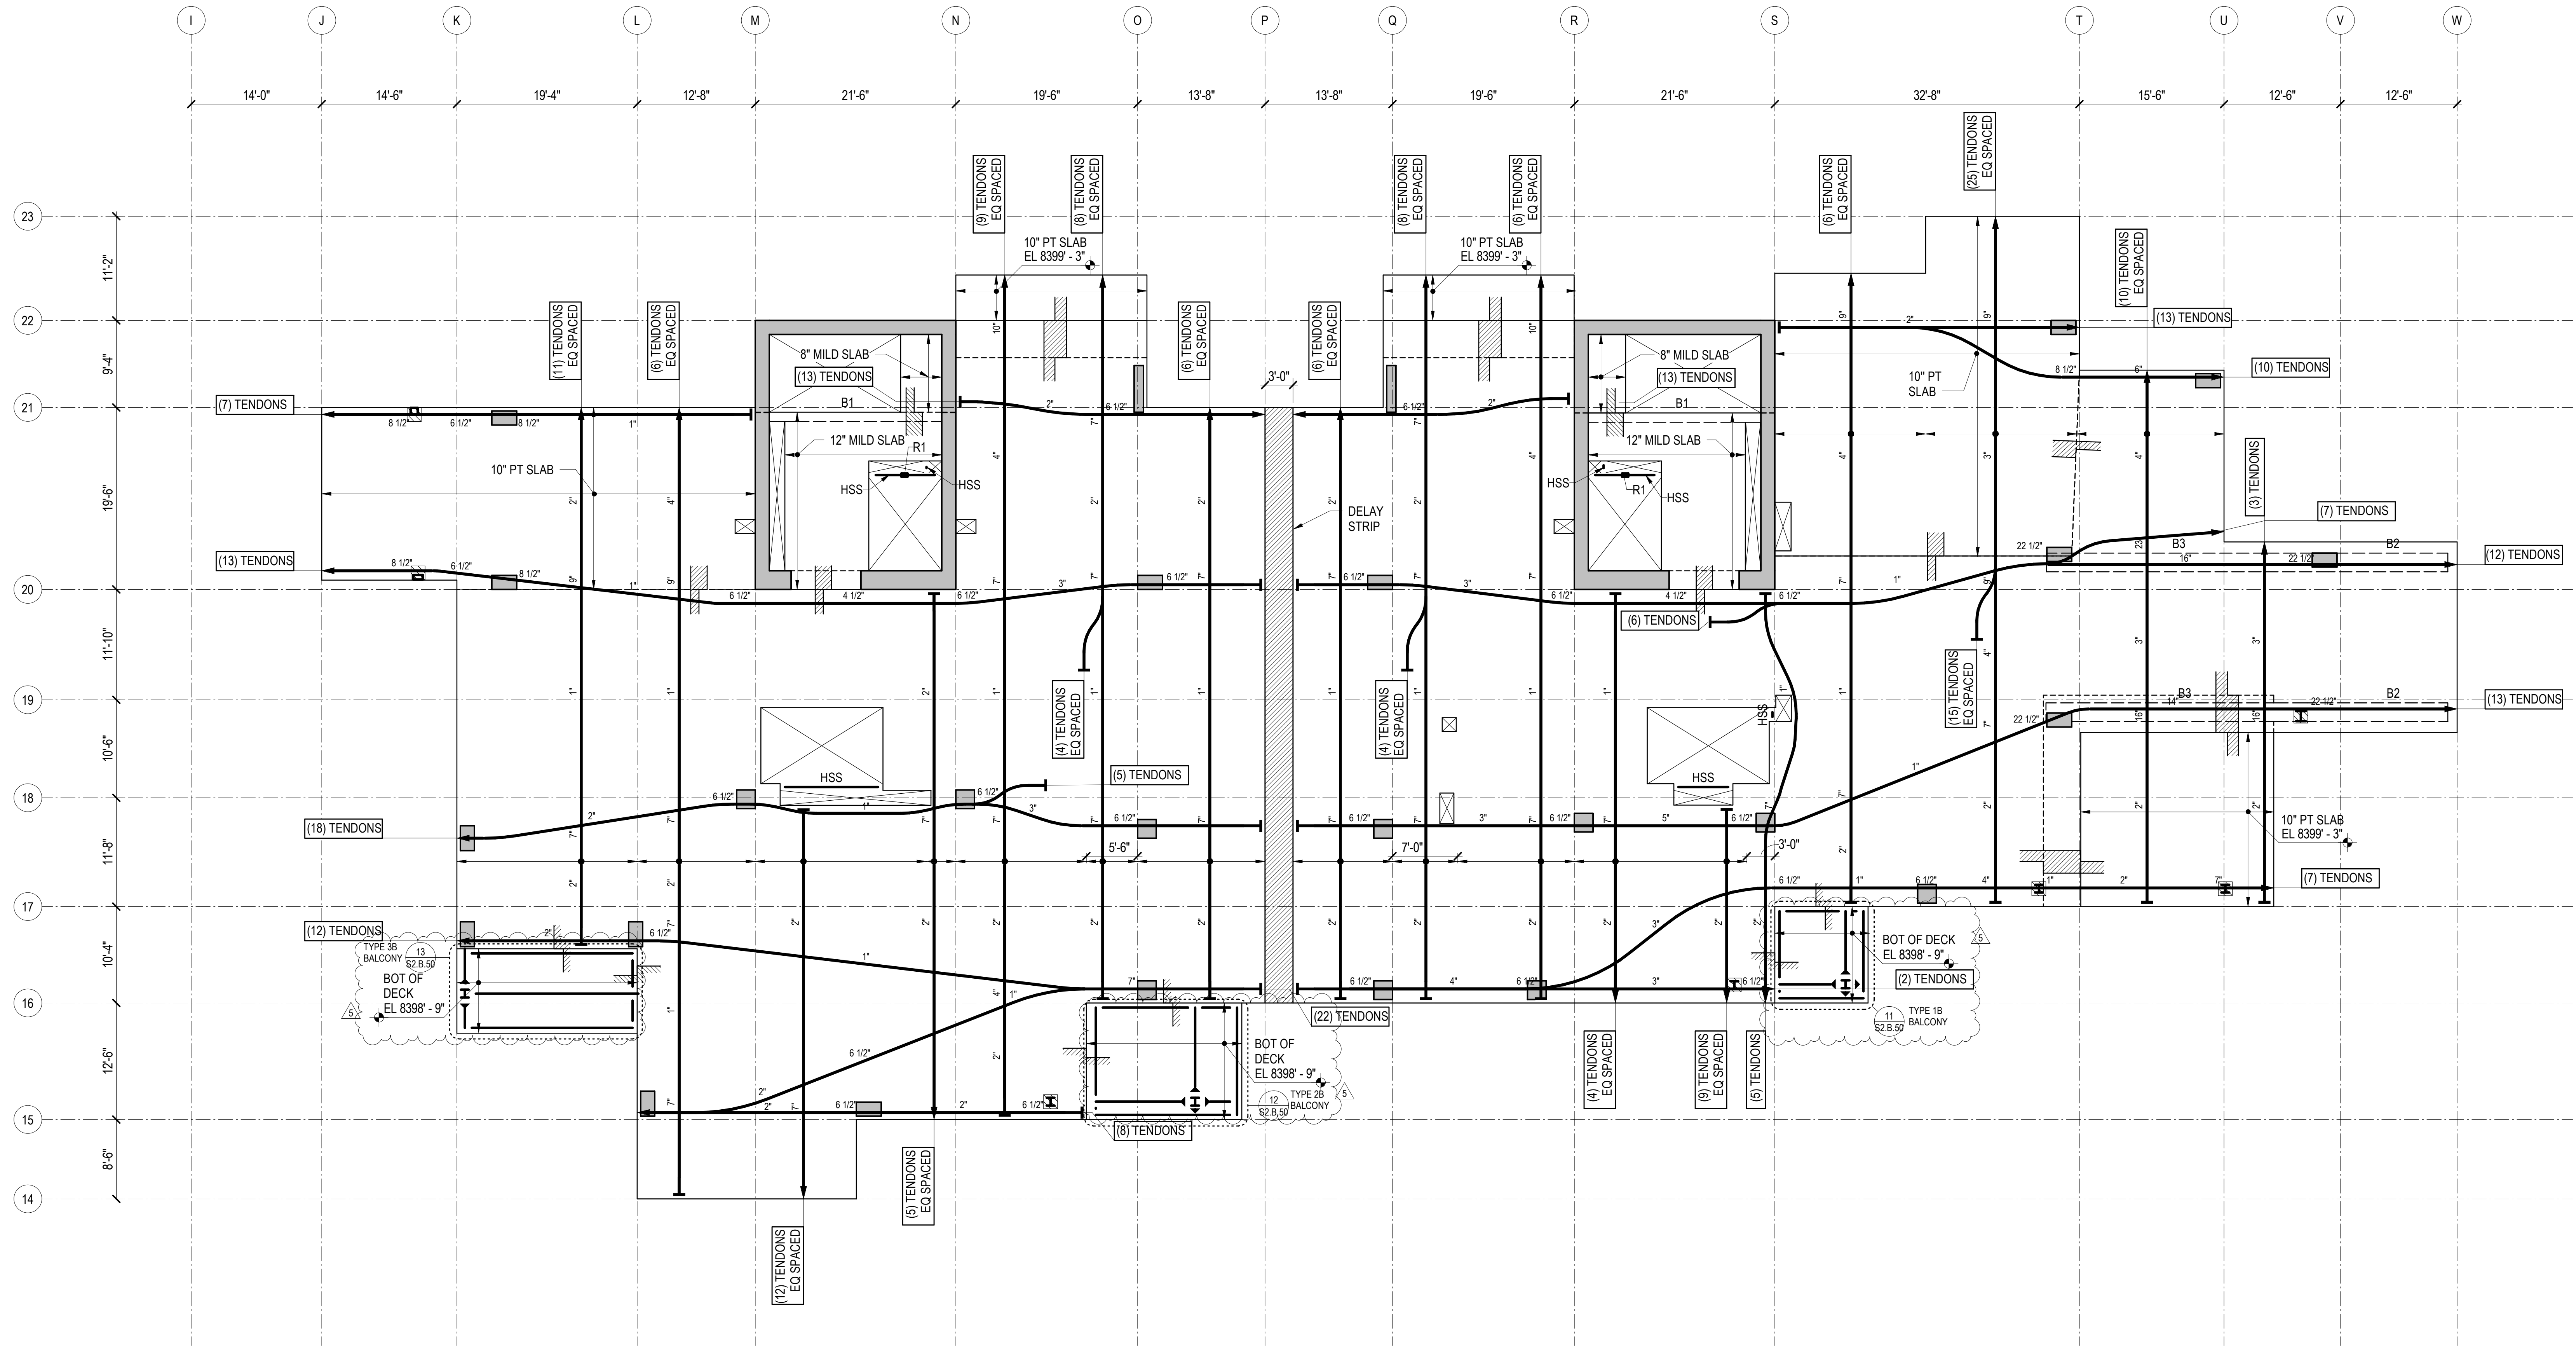

1 TOWER B - LEVEL 4 FRAMING PLAN  
1/8" = 1'-0"



REFERENCE DRAWINGS

S0.XX DRAWING INDEX, ABBREVIATIONS, LEGENDS, GENERAL NOTES  
S1.XX LOAD DIAGRAMS  
S2.XX PLANS  
S3.XX ELEVATIONS  
S4.XX TYPICAL DETAILS AND SCHEDULES  
S5.XX CONCRETE SECTIONS AND DETAILS  
S6.XX STEEL SECTIONS AND DETAILS

NOTES

1. REFERENCE FLOOR ELEVATION IS 8400' - 0". TOP OF STRUCTURAL CONCRETE SLAB IS 8399' - 11" UNLESS NOTED OTHERWISE. SEE ARCHITECTURAL DRAWINGS FOR DRAINAGE SLOPES NOT SHOWN.
2. STRUCTURAL SLAB IS AN 8-INCH THICK UNBONDED POST-TENSIONED TWO-WAY SLAB UNLESS NOTED OTHERWISE. SEE TYPICAL POST-TENSIONED SLAB DETAILS FOR ADDITIONAL INFORMATION.
3. THE MINIMUM NUMBER OF REQUIRED POST-TENSIONING TENDONS IS SHOWN ON THE DRAWINGS. FINAL COUNT, LAYOUT, AND LIVE END LOCATION IS PER DEFERRED DESIGN-BUILD SUBMITTAL PROVIDED BY THE CONTRACTOR.
4. CONCRETE PLACED IN THE SLAB/SHEAR WALL INTERSECTION, INCLUDING COUPLING BEAMS, SHALL HAVE MINIMUM CONCRETE STRENGTH EQUAL TO THAT SPECIFIED FOR THE SHEAR WALLS.
5. CONCRETE PLACED IN THE SLAB/COLUMN INTERSECTION SHALL HAVE MINIMUM CONCRETE STRENGTH AS SHOWN IN THE GENERAL NOTES, BUT NO LESS THAN THAT SPECIFIED FOR THE COLUMNS DIVIDED BY 1.4.
6. COORDINATE LOCATION OF ALL EMBEDS WITH MECHANICAL, ELECTRICAL, PLUMBING, AND EXTERIOR WALL SYSTEMS PRIOR TO CASTING THE SLAB.

7. SEE ARCHITECTURAL, MECHANICAL, PLUMBING, ELECTRICAL, AND OTHER DISCIPLINES DRAWINGS FOR OPENING SIZES AND LOCATIONS NOT SHOWN ON PLAN. SEE "TYPICAL OPENINGS AND EMBEDMENTS IN CONCRETE" DETAILS FOR OPENING PLACEMENT CRITERIA. NOTIFY THE STRUCTURAL ENGINEER OF ANY OPENINGS NOT SHOWN ON THE STRUCTURAL DRAWINGS FOR WHICH THE TYPICAL DETAILS DO NOT APPLY.
8. REFERENCE ALL CONSTRUCTION DOCUMENTS FOR SIZE, EXTENT, AND LOCATION OF CONCRETE CURBS, HOUSEKEEPING PADS, CMU WALLS, PLANTER WALLS, BOLLARDS, AND EDGE ANGLES. REINFORCE PER THE TYPICAL DETAILS.
9. INDICATES POUR STRIPS. WAIT 28 DAYS MINIMUM AFTER PLACING SLAB CONCRETE PRIOR TO CASTING POUR STRIPS. SEE "TYPICAL POST-TENSIONED DELAY STRIP" DETAIL FOR MORE INFORMATION.

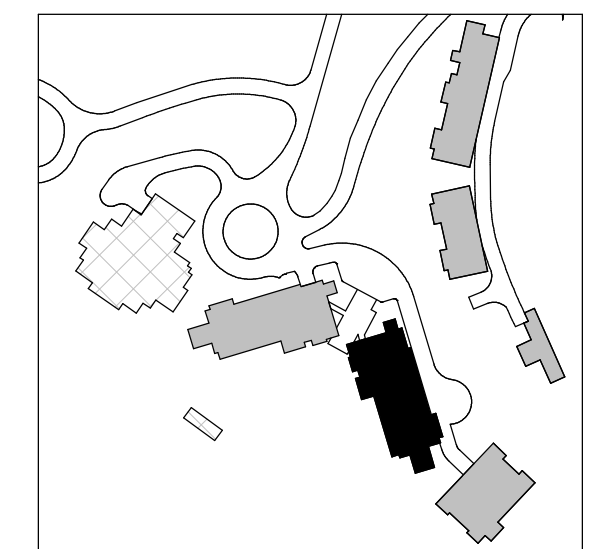

principal architect \_\_\_\_\_  
project manager \_\_\_\_\_  
drawn by \_\_\_\_\_  
checked by \_\_\_\_\_  
job no. 20052  
date 05/17/2024

revisions:

5	01/07/2025	ASI-007
3	9/19/2024	ASI-004
	04/08/2024	IFC SET 1 OF 3
	11/18/2022	95% CD
no.	date	by


IFC SET 2 OF 3

05/17/2024

TOWER B LEVEL 4  
FRAMING PLAN

S2.B.14





159 South Jackson St, Suite 600  
Seattle, Washington 98104 USA  
+1 206 624 5670 [olsonkundig.com](mailto:olsonkundig.com)


**SOMMET BLANC - ABC**  
DEER VALLEY, UTAH

revisions:

5	01/07/2025	ASI-007
	04/08/2024	IFC SET 1 OF 3
	11/18/2022	95% CD


5/17/2024

S2.B.14.R




1. SEE "GENERAL NOTES" FOR REINFORCING REQUIREMENTS.
2. SEE "TYPICAL POST-TENSIONED SLAB DETAILS" FOR ADDITIONAL INFORMATION.
3. SLAB REINFORCING SHALL BE PLACED IN THE FOLLOWING SEQUENCE:  
BOT BARS IN DIRECTION OF DISTRIBUTED TENDONS  
BOT BARS IN DIRECTION OF BANDED TENDONS  
TOP BARS IN DIRECTION OF BANDED TENDONS  
TOP BARS IN DIRECTION OF DISTRIBUTED TENDONS
4. (RX) INDICATES STUD RAIL. STUD RAILS SHALL BE PLACED AT ALL COLUMNS. SEE "TYPICAL STUD RAIL REINFORCEMENT AT COLUMNS" DETAIL AND STUD RAIL SCHEDULE.
5. SEE "TYPICAL CONCRETE OPENINGS AND EMBEDMENTS" FOR ADDITIONAL REINFORCEMENT REQUIREMENTS. NOTIFY STRUCTURAL ENGINEER OF ANY OPENINGS NOT SHOWN ON THE STRUCTURAL DRAWINGS FOR WHICH THE TYPICAL DETAILS DO NOT APPLY. ADDITIONAL REINFORCEMENT MAY BE REQUIRED.
6. WHERE BAR LENGTH CANNOT BE ACHIEVED DUE TO SLAB EDGE, HOOK BAR.
7. WHERE NOTES AS "HOOKED", PROVIDE 90 OR 180 DEGREE HOOK AS SHOWN ON PLAN. NOTED BAR LENGTH IS LENGTH OF STRAIGHT PORTION OF BAR.
8. PROVIDE INTEGRITY BOTTOM BARS PER STUD RAIL SCHEDULE AT ALL COLUMNS. CENTER REINFORCEMENT ON COLUMN AND PLACE INTEGRITY BARS EACH WAY WITHIN COLUMN VERTICAL REINFORCEMENT. TRIM AND HOOK AT SLAB EDGE AS REQUIRED.

PT TOP REINFORCEMENT SCHEDULE		
MARK	REINFORCING	REMARKS
PT50	(3) #5x5'-2"	HOOK AT END
PT51	(6) #5x6'-8"	HOOK AT END
PT52	(10) #5x9'-2"	HOOK AT END
PT53	(8) #5x6'-8"	HOOK AT END
PT54	(6) #5x14'-2"	HOOK AT END
PT55	(8) #5x14'-2"	HOOK AT END
PT56	(6) #5x11'-2"	HOOK AT END
PT57	(16) #5x14'-2"	HOOK AT END
PT58	(12) #5x6'-8" @ 12"	HOOK AT END
PT59	(14) #5x11'-2" @ 12"	HOOK AT END
PT60	#5x11'-2" @ 10"	HOOK AT END
PT81	#5x6'-8" @ 10"	HOOK AT END
PT82	#6x9'-0" @ 4"	HOOK AT END
PT83	#6x9'-0" @ 6"	HOOK AT END
PT84	#6x19'-2" @ 12"	HOOK AT END
PT85	#5x14'-2" @ 12"	HOOK AT END







1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65  
66  
67  
68  
69  
70  
71  
72  
73  
74  
75  
76  
77  
78  
79  
80  
81  
82  
83  
84  
85  
86  
87  
88  
89  
90  
91  
92  
93  
94  
95  
96  
97  
98  
99  
100  
101  
102  
103  
104  
105  
106  
107  
108  
109  
110  
111  
112  
113  
114  
115  
116  
117  
118  
119  
120  
121  
122  
123  
124  
125  
126  
127  
128  
129  
130  
131  
132  
133  
134  
135  
136  
137  
138  
139  
140  
141  
142  
143  
144  
145  
146  
147  
148  
149  
150  
151  
152  
153  
154  
155  
156  
157  
158  
159  
160  
161  
162  
163  
164  
165  
166  
167  
168  
169  
170  
171  
172  
173  
174  
175  
176  
177  
178  
179  
180  
181  
182  
183  
184  
185  
186  
187  
188  
189  
190  
191  
192  
193  
194  
195  
196  
197  
198  
199  
200  
201  
202  
203  
204  
205  
206  
207  
208  
209  
210  
211  
212  
213  
214  
215  
216  
217  
218  
219  
220  
221  
222  
223  
224  
225  
226  
227  
228  
229  
230  
231  
232  
233  
234  
235  
236  
237  
238  
239  
240  
241  
242  
243  
244  
245  
246  
247  
248  
249  
250  
251  
252  
253  
254  
255  
256  
257  
258  
259  
260  
261  
262  
263  
264  
265  
266  
267  
268  
269  
270  
271  
272  
273  
274  
275  
276  
277  
278  
279  
280  
281  
282  
283  
284  
285  
286  
287  
288  
289  
290  
291  
292  
293  
294  
295  
296  
297  
298  
299  
300  
301  
302  
303  
304  
305  
306  
307  
308  
309  
310  
311  
312  
313  
314  
315  
316  
317  
318  
319  
320  
321  
322  
323  
324  
325  
326  
327  
328  
329  
330  
331  
332  
333  
334  
335  
336  
337  
338  
339  
340  
341  
342  
343  
344  
345  
346  
347  
348  
349  
350  
351  
352  
353  
354  
355  
356  
357  
358  
359  
360  
361  
362  
363  
364  
365  
366  
367  
368  
369  
370  
371  
372  
373  
374  
375  
376  
377  
378  
379  
380  
381  
382  
383  
384  
385  
386  
387  
388  
389  
390  
391  
392  
393  
394  
395  
396  
397  
398  
399  
400  
401  
402  
403  
404  
405  
406  
407  
408  
409  
410  
411  
412  
413  
414  
415  
416  
417  
418  
419  
420  
421  
422  
423  
424  
425  
426  
427  
428  
429  
430  
431  
432  
433  
434  
435  
436  
437  
438  
439  
440  
441  
442  
443  
444  
445  
446  
447  
448  
449  
450  
451  
452  
453  
454  
455  
456  
457  
458  
459  
460  
461  
462  
463  
464  
465  
466  
467  
468  
469  
470  
471  
472  
473  
474  
475  
476  
477  
478  
479  
480  
481  
482  
483  
484  
485  
486  
487  
488  
489  
490  
491  
492  
493  
494  
495  
496  
497  
498  
499  
500  
501  
502  
503  
504  
505  
506  
507  
508  
509  
510  
511  
512  
513  
514  
515  
516  
517  
518  
519  
520  
521  
522  
523  
524  
525  
526  
527  
528  
529  
530  
531  
532  
533  
534  
535  
536  
537  
538  
539  
540  
541  
542  
543  
544  
545  
546  
547  
548  
549  
550  
551  
552  
553  
554  
555  
556  
557  
558  
559  
560  
561  
562  
563  
564  
565  
566  
567  
568  
569  
570  
571  
572  
573  
574  
575  
576  
577  
578  
579  
580  
581  
582  
583  
584  
585  
586  
587  
588  
589  
590  
591  
592  
593  
594  
595  
596  
597  
598  
599  
600  
601  
602  
603  
604  
605  
606  
607  
608  
609  
610  
611  
612  
613  
614  
615  
616  
617  
618  
619  
620  
621  
622  
623  
624  
625  
626  
627  
628  
629  
630  
631  
632  
633  
634  
635  
636  
637  
638  
639  
640  
641  
642  
643  
644  
645  
646  
647  
648  
649  
650  
651  
652  
653  
654  
655  
656  
657  
658  
659  
660  
661  
662  
663  
664  
665  
666  
667  
668  
669  
670  
671  
672  
673  
674  
675  
676  
677  
678  
679  
680  
681  
682  
683  
684  
685  
686  
687  
688  
689  
690  
691  
692  
693  
694  
695  
696  
697  
698  
699  
700  
701  
702  
703  
704  
705  
706  
707  
708  
709  
710  
711  
712  
713  
714  
715  
716  
717  
718  
719  
720  
721  
722  
723  
724  
725  
726  
727  
728  
729  
730  
731  
732  
733  
734  
735  
736  
737  
738  
739  
740  
741  
742  
743  
744  
745  
746  
747  
748  
749  
750  
751  
752  
753  
754  
755  
756  
757  
758  
759  
760  
761  
762  
763  
764  
765  
766  
767  
768  
769  
770  
771  
772  
773  
774  
775  
776  
777  
778  
779  
780  
781  
782  
783  
784  
785  
786  
787  
788  
789  
790  
791  
792  
793  
794  
795  
796  
797  
798  
799  
800  
801  
802  
803  
804  
805  
806  
807  
808  
809  
810  
811  
812  
813  
814  
815  
816  
817  
818  
819  
820  
821  
822  
823  
824  
825  
826  
827  
828  
829  
830  
831  
832  
833  
834  
835  
836  
837  
838  
839  
840  
84



**SOMMET BLANC - ABC**  
DEER VALLEY, UTAH

Seattle Chicago  
www.mika.com  
206 292 1200

## UNIT B LEVEL 5 READING PLAN

### B.15

**S2.B.15**

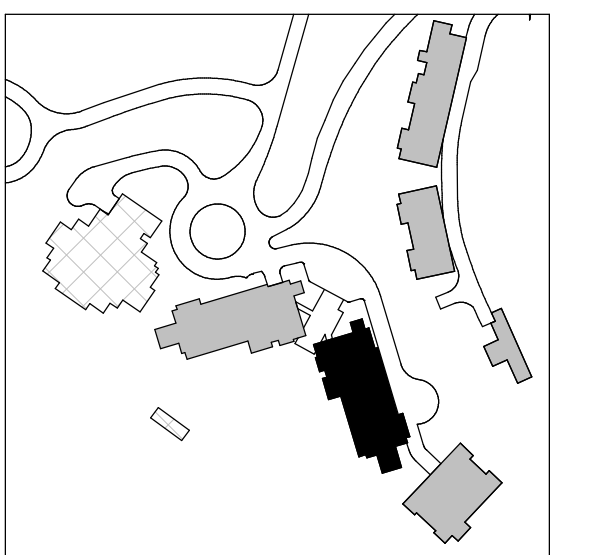


1 TOWER B - LEVEL 5 FRAMING PLAN  
1/8" = 1'-0"

### REFERENCE DRAWINGS


S0.XX	DRAWING INDEX, ABBREVIATIONS, LEGENDS, GENERAL NOTES
S1.XX	LOAD DIAGRAMS
S2.XX	PLANS
S3.XX	ELEVATIONS
S4.XX	TYPICAL DETAILS AND SCHEDULES
S5.XX	CONCRETE SECTIONS AND DETAILS
S6.XX	STEEL SECTIONS AND DETAILS

## NOTES

1. REFERENCE FLOOR ELEVATION IS 8412 - 0". TOP OF STRUCTURAL CONCRETE SLAB IS 8411' - 11" UNLESS NOTED OTHERWISE. SEE ARCHITECTURAL DRAWINGS FOR DRAINAGE SLOPES NOT SHOWN.
2. STRUCTURAL SLAB IS AN 8-INCH THICK UNBONDED POST-TENSIONED TWO-WAY SLAB UNLESS NOTED OTHERWISE. SEE TYPICAL POST-TENSIONED SLAB DETAILS FOR ADDITIONAL INFORMATION.
3. THE MINIMUM NUMBER OF REQUIRED POST-TENSIONING TENDONS IS SHOWN ON THE DRAWINGS. FINAL COUNT, LAYOUT, AND LIVE END LOCATION IS PER DEFERRED DESIGN-BUILD SUBMITTAL PROVIDED BY THE CONTRACTOR.
4. CONCRETE PLACED IN THE SLAB/SHEAR WALL INTERSECTION, INCLUDING COUPLING BEAMS, SHALL HAVE MINIMUM CONCRETE STRENGTH EQUAL TO THAT SPECIFIED FOR THE SHEAR WALLS.
5. CONCRETE PLACED IN THE SLAB/COLUMN INTERSECTION SHALL HAVE MINIMUM CONCRETE STRENGTH AS SHOWN IN THE GENERAL NOTES, BUT NO LESS THAN THAT SPECIFIED FOR THE COLUMNS DIVIDED BY 1.4.
6. COORDINATE LOCATION OF ALL EMBEDS WITH MECHANICAL, ELECTRICAL, PLUMBING, AND EXTERIOR WALL SYSTEMS PRIOR TO CASTING THE SLAB.

7. SEE ARCHITECTURAL, MECHANICAL, PLUMBING, ELECTRICAL, AND OTHER DISCIPLINES DRAWINGS FOR OPENING SIZES AND LOCATIONS NOT SHOWN ON PLAN. SEE "TYPICAL OPENINGS AND EMBEDMENTS IN CONCRETE" DETAILS FOR OPENING PLACEMENT CRITERIA. NOTIFY THE STRUCTURAL ENGINEER OF ANY OPENINGS NOT SHOWN ON THE STRUCTURAL DRAWINGS FOR WHICH THE TYPICAL DETAILS DO NOT APPLY.
8. REFERENCE ALL CONSTRUCTION DOCUMENTS FOR SIZE, EXTENT, AND LOCATION OF CONCRETE CURBS, HOUSEKEEPING PADS, CMU WALLS, PLANTER WALLS, BOLLARDS, AND EDGE ANGLES. REINFORCE PER THE TYPICAL DETAILS.
9.  INDICATES FOUR STRIPS, WAIT 28 DAYS MINIMUM AFTER PLACING SLAB CONCRETE PRIOR TO CASTING POST STRIPS. SEE "TYPICAL POST-TENSIONED DELAY STRIP" DETAIL FOR MORE INFORMATION.





159 South Jackson St, Suite 600  
Seattle, Washington 98104 USA  
+1 206 624 5670 [olsonkundig.com](mailto:olsonkundig.com)


**SOMMET BLANC - ABC**  
DEER VALLEY, UTAH

isions:

o.	date	by
----	------	----


5/17/2024

S2.B.15.R




1. SEE "GENERAL NOTES" FOR REINFORCING REQUIREMENTS.
2. SEE "TYPICAL POST-TENSIONED SLAB DETAILS" FOR ADDITIONAL INFORMATION.
3. SLAB REINFORCING SHALL BE PLACED IN THE FOLLOWING SEQUENCE:  
BOT BARS IN DIRECTION OF DISTRIBUTED TENDONS  
BOT BARS IN DIRECTION OF BANDED TENDONS  
TOP BARS IN DIRECTION OF BANDED TENDONS  
TOP BARS IN DIRECTION OF DISTRIBUTED TENDONS
4. (RX) INDICATES STUD RAIL. STUD RAILS SHALL BE PLACED AT ALL COLUMNS. SEE "TYPICAL STUD RAIL REINFORCEMENT AT COLUMNS" DETAIL AND STUD RAIL SCHEDULE.
5. SEE "TYPICAL CONCRETE OPENINGS AND EMBEDMENTS" FOR ADDITIONAL REINFORCEMENT REQUIREMENTS. NOTIFY STRUCTURAL ENGINEER OF ANY OPENINGS NOT SHOWN ON THE STRUCTURAL DRAWINGS FOR WHICH THE TYPICAL DETAILS DO NOT APPLY. ADDITIONAL REINFORCEMENT MAY BE REQUIRED.
6. WHERE BAR LENGTH CANNOT BE ACHIEVED DUE TO SLAB EDGE, HOOK BAR.
7. WHERE NOTES AS "HOOKED", PROVIDE 90 OR 180 DEGREE HOOK AS SHOWN ON PLAN. NOTED BAR LENGTH IS LENGTH OF STRAIGHT PORTION OF BAR.
8. PROVIDE INTEGRITY BOTTOM BARS PER STUD RAIL SCHEDULE AT ALL COLUMNS. CENTER REINFORCEMENT ON COLUMNS AND PLACE INTEGRITY BARS EACH WAY WITHIN COLUMN VERTICAL REINFORCEMENT. TRIM AND HOOK AT SLAB EDGE AS REQUIRED.

PT TOP REINFORCEMENT SCHEDULE		
MARK	REINFORCING	REMARKS
PT50	(3) #5x5'-2"	HOOK AT END
PT51	(6) #5x6'-8"	HOOK AT END
PT52	(10) #5x9'-2"	HOOK AT END
PT53	(3) #5x6'-8"	HOOK AT END
PT54	(6) #5x14'-2"	HOOK AT END
PT55	(8) #5x14'-2"	HOOK AT END
PT56	(16) #5x11'-2"	HOOK AT END
PT57	(16) #5x14'-2"	HOOK AT END
PT58	(12) #5x6'-8" @ 12"	HOOK AT END
PT59	(14) #5x11'-2" @ 12"	HOOK AT END
PT60	#5x11'-2" @ 10"	HOOK AT END
PT81	#5x6'-8" @ 10"	HOOK AT END
PT82	#6x9'-0" @ 4"	HOOK AT END
PT83	#6x9'-0" @ 6"	HOOK AT END
PT84	#6x19'-2" @ 12"	HOOK AT END
PT85	#5x14'-2" @ 12"	HOOK AT END







Reserved for permit stamp

159 South Jackson St., Suite 600  
Seattle, Washington 98104 USA  
+1 206 624 9970 olsonkundig.com

Olson Kundig

project:  
SOMMET BLANC - ABC  
DEER VALLEY, UTAH

MAGNUSSON  
KLEMENCIC  
ASSOCIATES

Structural + Civil Engineers  
Seattle Chicago  
www.mka.com  
206.292.1200

principal architect \_\_\_\_\_  
project manager \_\_\_\_\_  
drawn by \_\_\_\_\_

checked by \_\_\_\_\_  
job no. 20052  
date 05/17/2024

revisions:


5	01/07/2025	ASJ-007
3	9/19/2024	ASJ-004
	04/08/2024	IFC SET 1 OF 3
	11/18/2022	95% CD
no.	date	by

IFC SET 2 OF 3

05/17/2024

TOWER B LEVEL 6  
FRAMING PLAN

S2.B.16

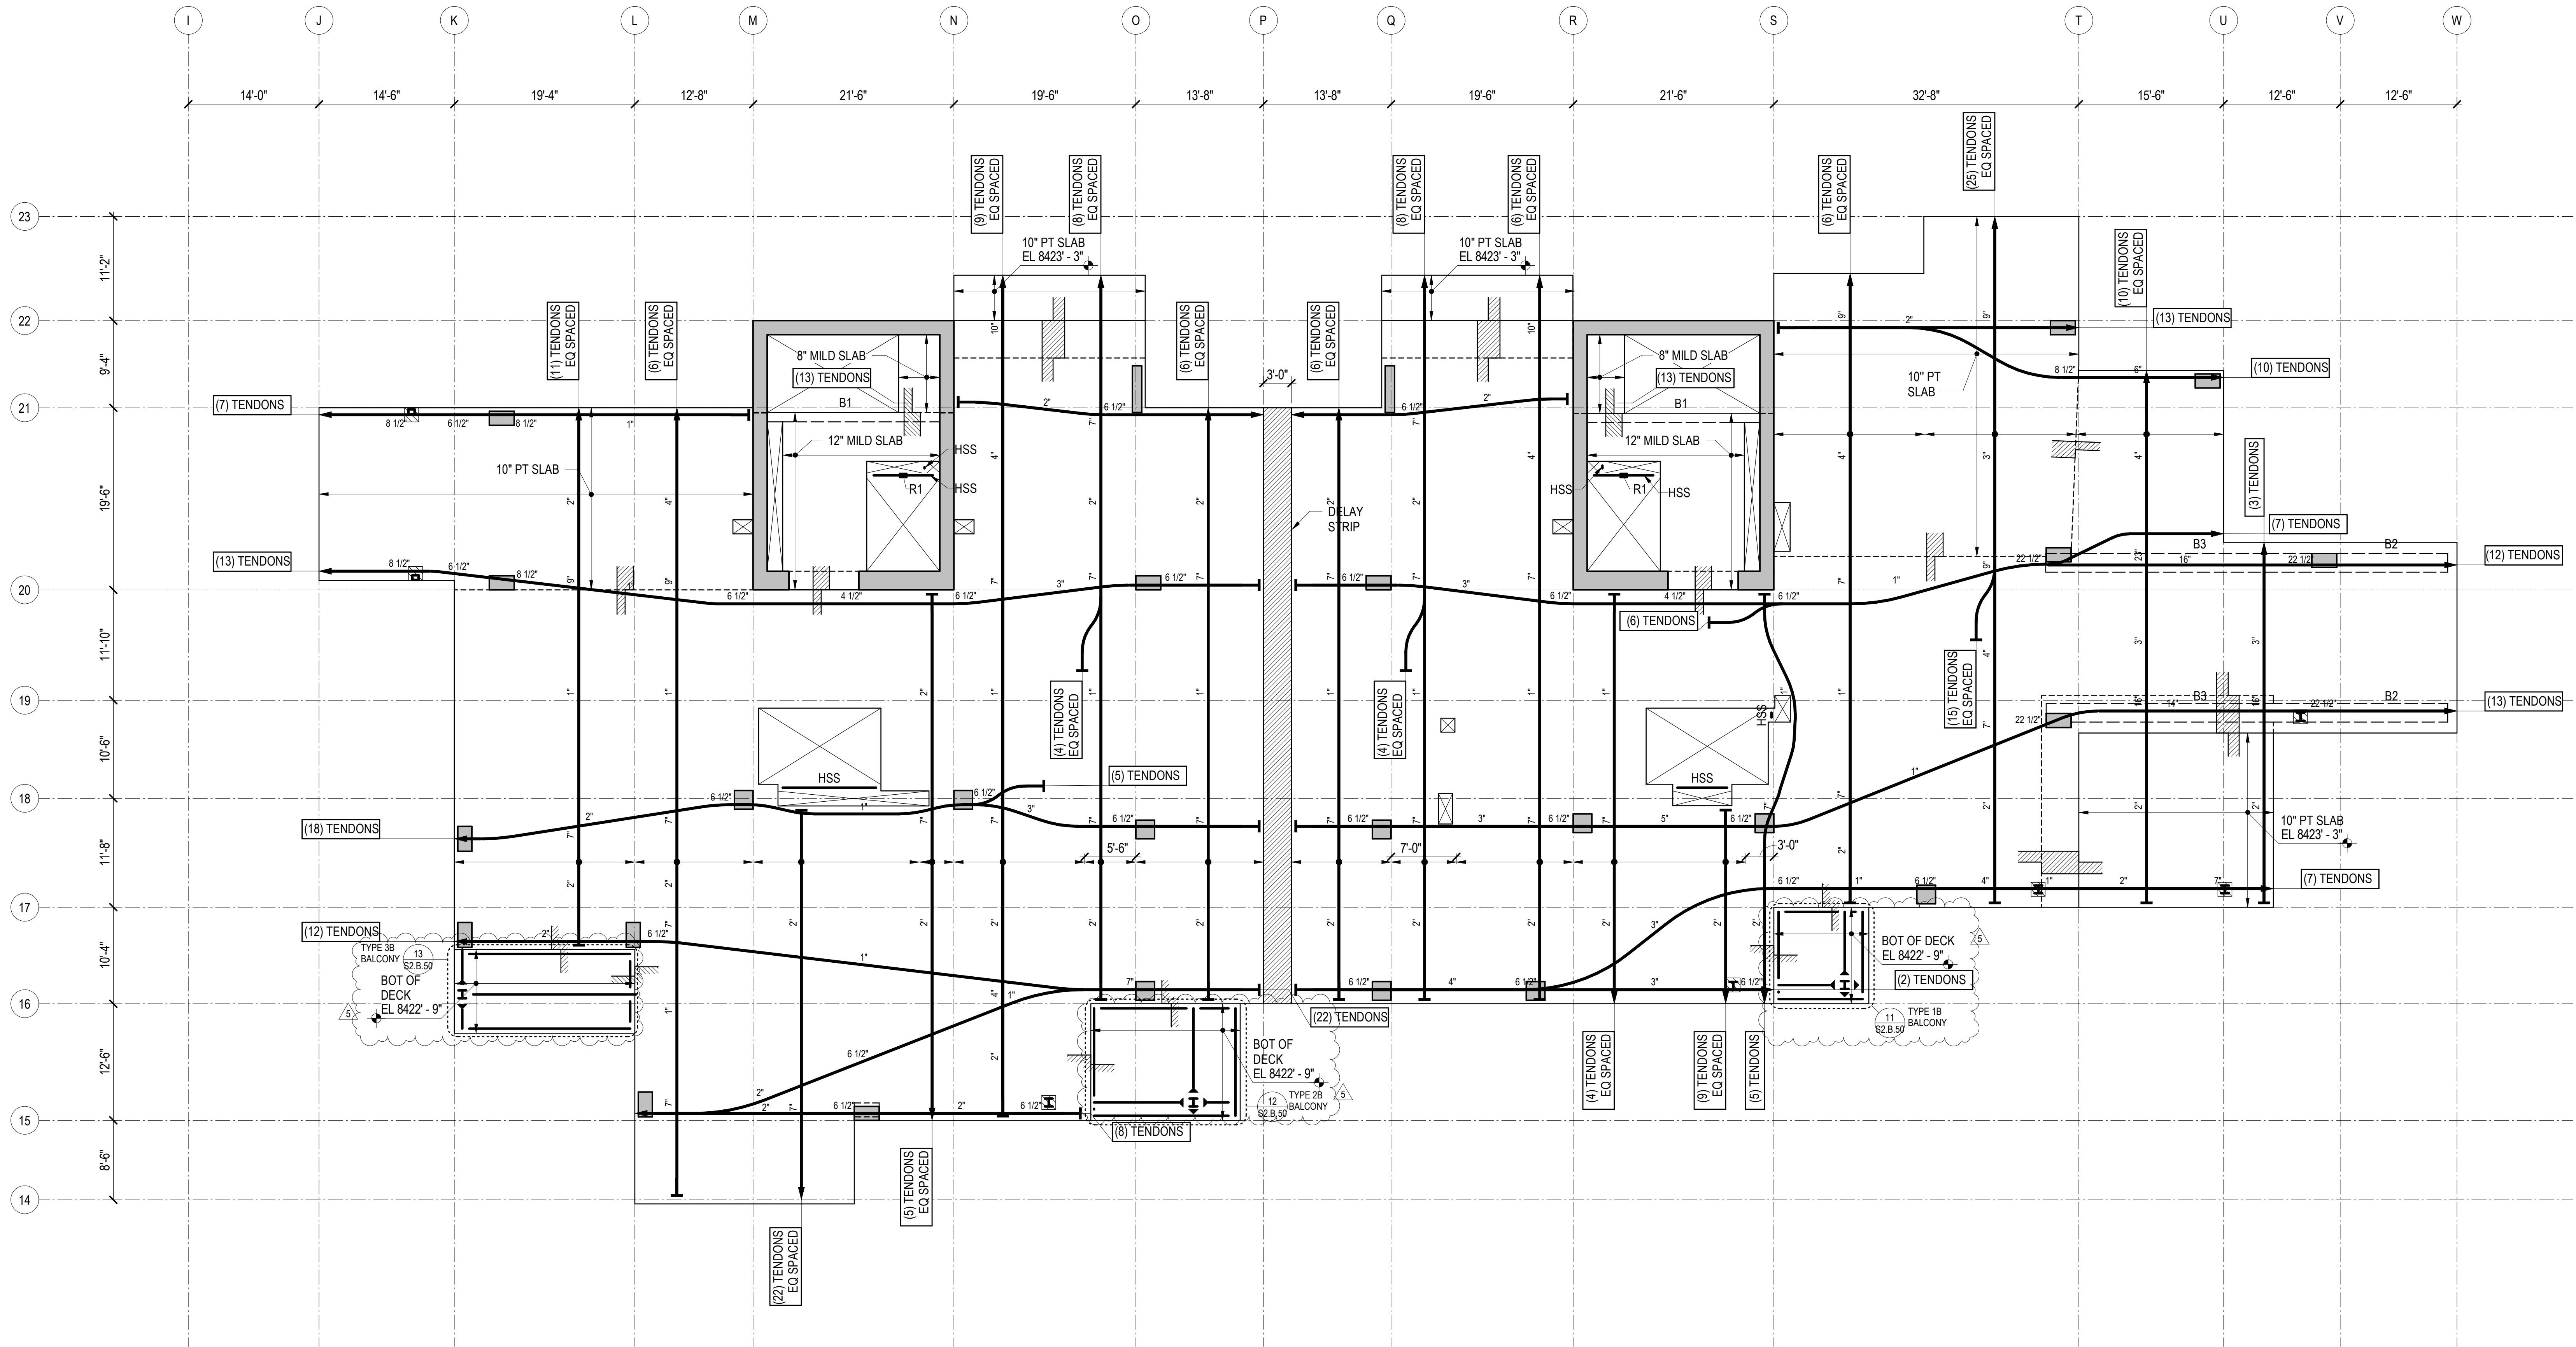

1 TOWER B - LEVEL 6 FRAMING PLAN  
1/8" = 1'-0"

#### REFERENCE DRAWINGS

S0.XX DRAWING INDEX, ABBREVIATIONS, LEGENDS, GENERAL NOTES  
S1.XX LOAD DIAGRAMS  
S2.XX PLANS  
S3.XX ELEVATIONS  
S4.XX TYPICAL DETAILS AND SCHEDULES  
S5.XX CONCRETE SECTIONS AND DETAILS  
S6.XX STEEL SECTIONS AND DETAILS

#### NOTES



- REFERENCE FLOOR ELEVATION IS 8424'-0". TOP OF STRUCTURAL CONCRETE SLAB IS 8423'-11" UNLESS NOTED OTHERWISE. SEE ARCHITECTURAL DRAWINGS FOR DRAINAGE SLOPES NOT SHOWN.
- STRUCTURAL SLAB IS AN 8-INCH THICK UNBONDED POST-TENSIONED TWO-WAY SLAB UNLESS NOTED OTHERWISE. SEE TYPICAL POST-TENSIONED SLAB DETAILS FOR ADDITIONAL INFORMATION.
- THE MINIMUM NUMBER OF REQUIRED POST-TENSIONING TENDONS IS SHOWN ON THE DRAWINGS. FINAL COUNT, LAYOUT, AND LIVE END LOCATION IS PER DEFERRED DESIGN-BUILD SUBMITTAL PROVIDED BY THE CONTRACTOR.
- CONCRETE PLACED IN THE SLAB/SHEAR WALL INTERSECTION, INCLUDING COUPLING BEAMS, SHALL HAVE MINIMUM CONCRETE STRENGTH EQUAL TO THAT SPECIFIED FOR THE SHEAR WALLS.
- CONCRETE PLACED IN THE SLAB/COLUMN INTERSECTION SHALL HAVE MINIMUM CONCRETE STRENGTH AS SHOWN IN THE GENERAL NOTES, BUT NO LESS THAN THAT SPECIFIED FOR THE COLUMNS DIVIDED BY 1.4.
- COORDINATE LOCATION OF ALL EMBEDS WITH MECHANICAL, ELECTRICAL, PLUMBING, AND EXTERIOR WALL SYSTEMS PRIOR TO CASTING THE SLAB.

7. SEE ARCHITECTURAL, MECHANICAL, PLUMBING, ELECTRICAL, AND OTHER DISCIPLINES DRAWINGS FOR OPENING SIZES AND LOCATIONS NOT SHOWN ON PLAN. SEE "TYPICAL OPENINGS AND EMBEDMENTS IN CONCRETE" DETAILS FOR OPENING PLACEMENT CRITERIA. NOTIFY THE STRUCTURAL ENGINEER OF ANY OPENINGS NOT SHOWN ON THE STRUCTURAL DRAWINGS FOR WHICH THE TYPICAL DETAILS DO NOT APPLY.


8. REFERENCE ALL CONSTRUCTION DOCUMENTS FOR SIZE, EXTENT, AND LOCATION OF CONCRETE CURBS, HOUSEKEEPING PADS, CMU WALLS, PLANTER WALLS, BOLLARDS, AND EDGE ANGLES. REINFORCE PER THE TYPICAL DETAILS.

9. INDICATES POUR STRIPS. WAIT 28 DAYS MINIMUM AFTER PLACING SLAB CONCRETE PRIOR TO CASTING POUR STRIPS. SEE "TYPICAL POST-TENSIONED DELAY STRIP" DETAIL FOR MORE INFORMATION.

10. INDICATES TYPICAL BUILT-UP SLAB ON RIGID FOAM. SEE ARCHITECTURAL DRAWINGS FOR LOCATIONS AND ELEVATIONS OF ARCHITECTURAL BUILT-UP SLABS. SEE TYPICAL BUILT-UP SLAB DETAIL FOR ADDITIONAL INFORMATION.

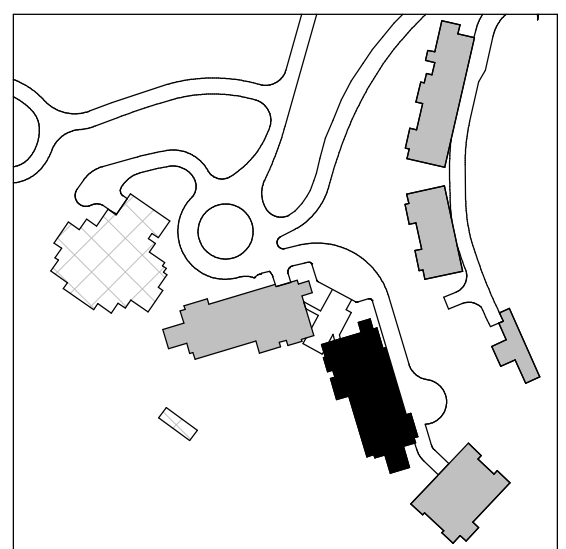





159 South Jackson St, Suite 600  
Seattle, Washington 98104 USA  
+1 206 624 5670 [olsonkundig.com](mailto:olsonkundig.com)

**SOMMET BLANC - ABC**  
DEER VALLEY, UTAH

Seattle Chicago  
www.mika.com  
206 292 1200

checked by \_\_\_\_\_  
job no. 20052  
date 05/17/2024


isions:

01/07/2025	ASI-007
04/08/2024	IFC SET 1 OF 3
11/18/2022	95% CD
date	by

5/17/2024


POWER B LEVEL 6  
REINFORCING  
PLAN

S2.B.16.R




1. SEE "GENERAL NOTES" FOR REINFORCING REQUIREMENTS.
2. SEE "TYPICAL POST-TENSIONED SLAB DETAILS" FOR ADDITIONAL INFORMATION.
3. SLAB REINFORCING SHALL BE PLACED IN THE FOLLOWING SEQUENCE:  
BOT BARS IN DIRECTION OF DISTRIBUTED TENDONS  
BOT BARS IN DIRECTION OF BANDED TENDONS  
TOP BARS IN DIRECTION OF BANDED TENDONS  
TOP BARS IN DIRECTION OF DISTRIBUTED TENDONS
4. (RX) INDICATES STUD RAIL. STUD RAILS SHALL BE PLACED AT ALL COLUMNS. SEE "TYPICAL STUD RAIL REINFORCEMENT AT COLUMNS" DETAIL AND STUD RAIL SCHEDULE.
5. SEE "TYPICAL CONCRETE OPENINGS AND EMBEDMENTS" FOR ADDITIONAL REINFORCEMENT REQUIREMENTS. NOTIFY STRUCTURAL ENGINEER OF ANY OPENINGS NOT SHOWN ON THE STRUCTURAL DRAWINGS FOR WHICH THE TYPICAL DETAILS DO NOT APPLY. ADDITIONAL REINFORCEMENT MAY BE REQUIRED.
6. WHERE BAR LENGTH CANNOT BE ACHIEVED DUE TO SLAB EDGE, HOOK BAR.
7. WHERE NOTES AS "HOOKED", PROVIDE 90 OR 180 DEGREE HOOK AS SHOWN ON PLAN. NOTED BAR LENGTH IS LENGTH OF STRAIGHT PORTION OF BAR.
8. PROVIDE INTEGRITY BOTTOM BARS PER STUD RAIL SCHEDULE AT ALL COLUMNS. CENTER REINFORCEMENT ON COLUMNS AND PLACE INTEGRITY BARS EACH WAY WITHIN COLUMN VERTICAL REINFORCEMENT. TRIM AND HOOK AT SLAB EDGE AS REQUIRED.

PT TOP REINFORCEMENT SCHEDULE		
MARK	REINFORCING	REMARKS
PT50	(3) #5x5'-2"	HOOK AT END
PT51	(6) #5x6'-8"	HOOK AT END
PT52	(10) #5x9'-2"	HOOK AT END
PT53	(8) #5x6'-8"	HOOK AT END
PT54	(6) #5x14'-2"	HOOK AT END
PT55	(8) #5x14'-2"	HOOK AT END
PT56	(16) #5x11'-2"	HOOK AT END
PT57	(16) #5x14'-2"	HOOK AT END
PT58	(12) #5x6'-8" @ 12"	HOOK AT END
PT59	(14) #5x11'-2" @ 12"	HOOK AT END
PT60	#5x11'-2" @ 10"	HOOK AT END
PT61	#5x6'-8" @ 10"	HOOK AT END
PT62	#6x9'-0" @ 4"	HOOK AT END
PT63	#6x9'-0" @ 6"	HOOK AT END
PT64	#6x19'-2" @ 12"	HOOK AT END
PT65	#5x14'-2" @ 12"	HOOK AT END








Reserved for permit stamp

159 South Jackson St. Suite 600  
Seattle, Washington 98104 USA  
+1 206 624 9970 olsonkundig.com

Olson Kundig

project  
SOMMET BLANC - ABC  
DEER VALLEY, UTAH

MAGNUSSON  
KLEMENCIC  
ASSOCIATES  
Structural + Civil Engineers  
Seattle Chicago  
www.mka.com  
206.292.1200

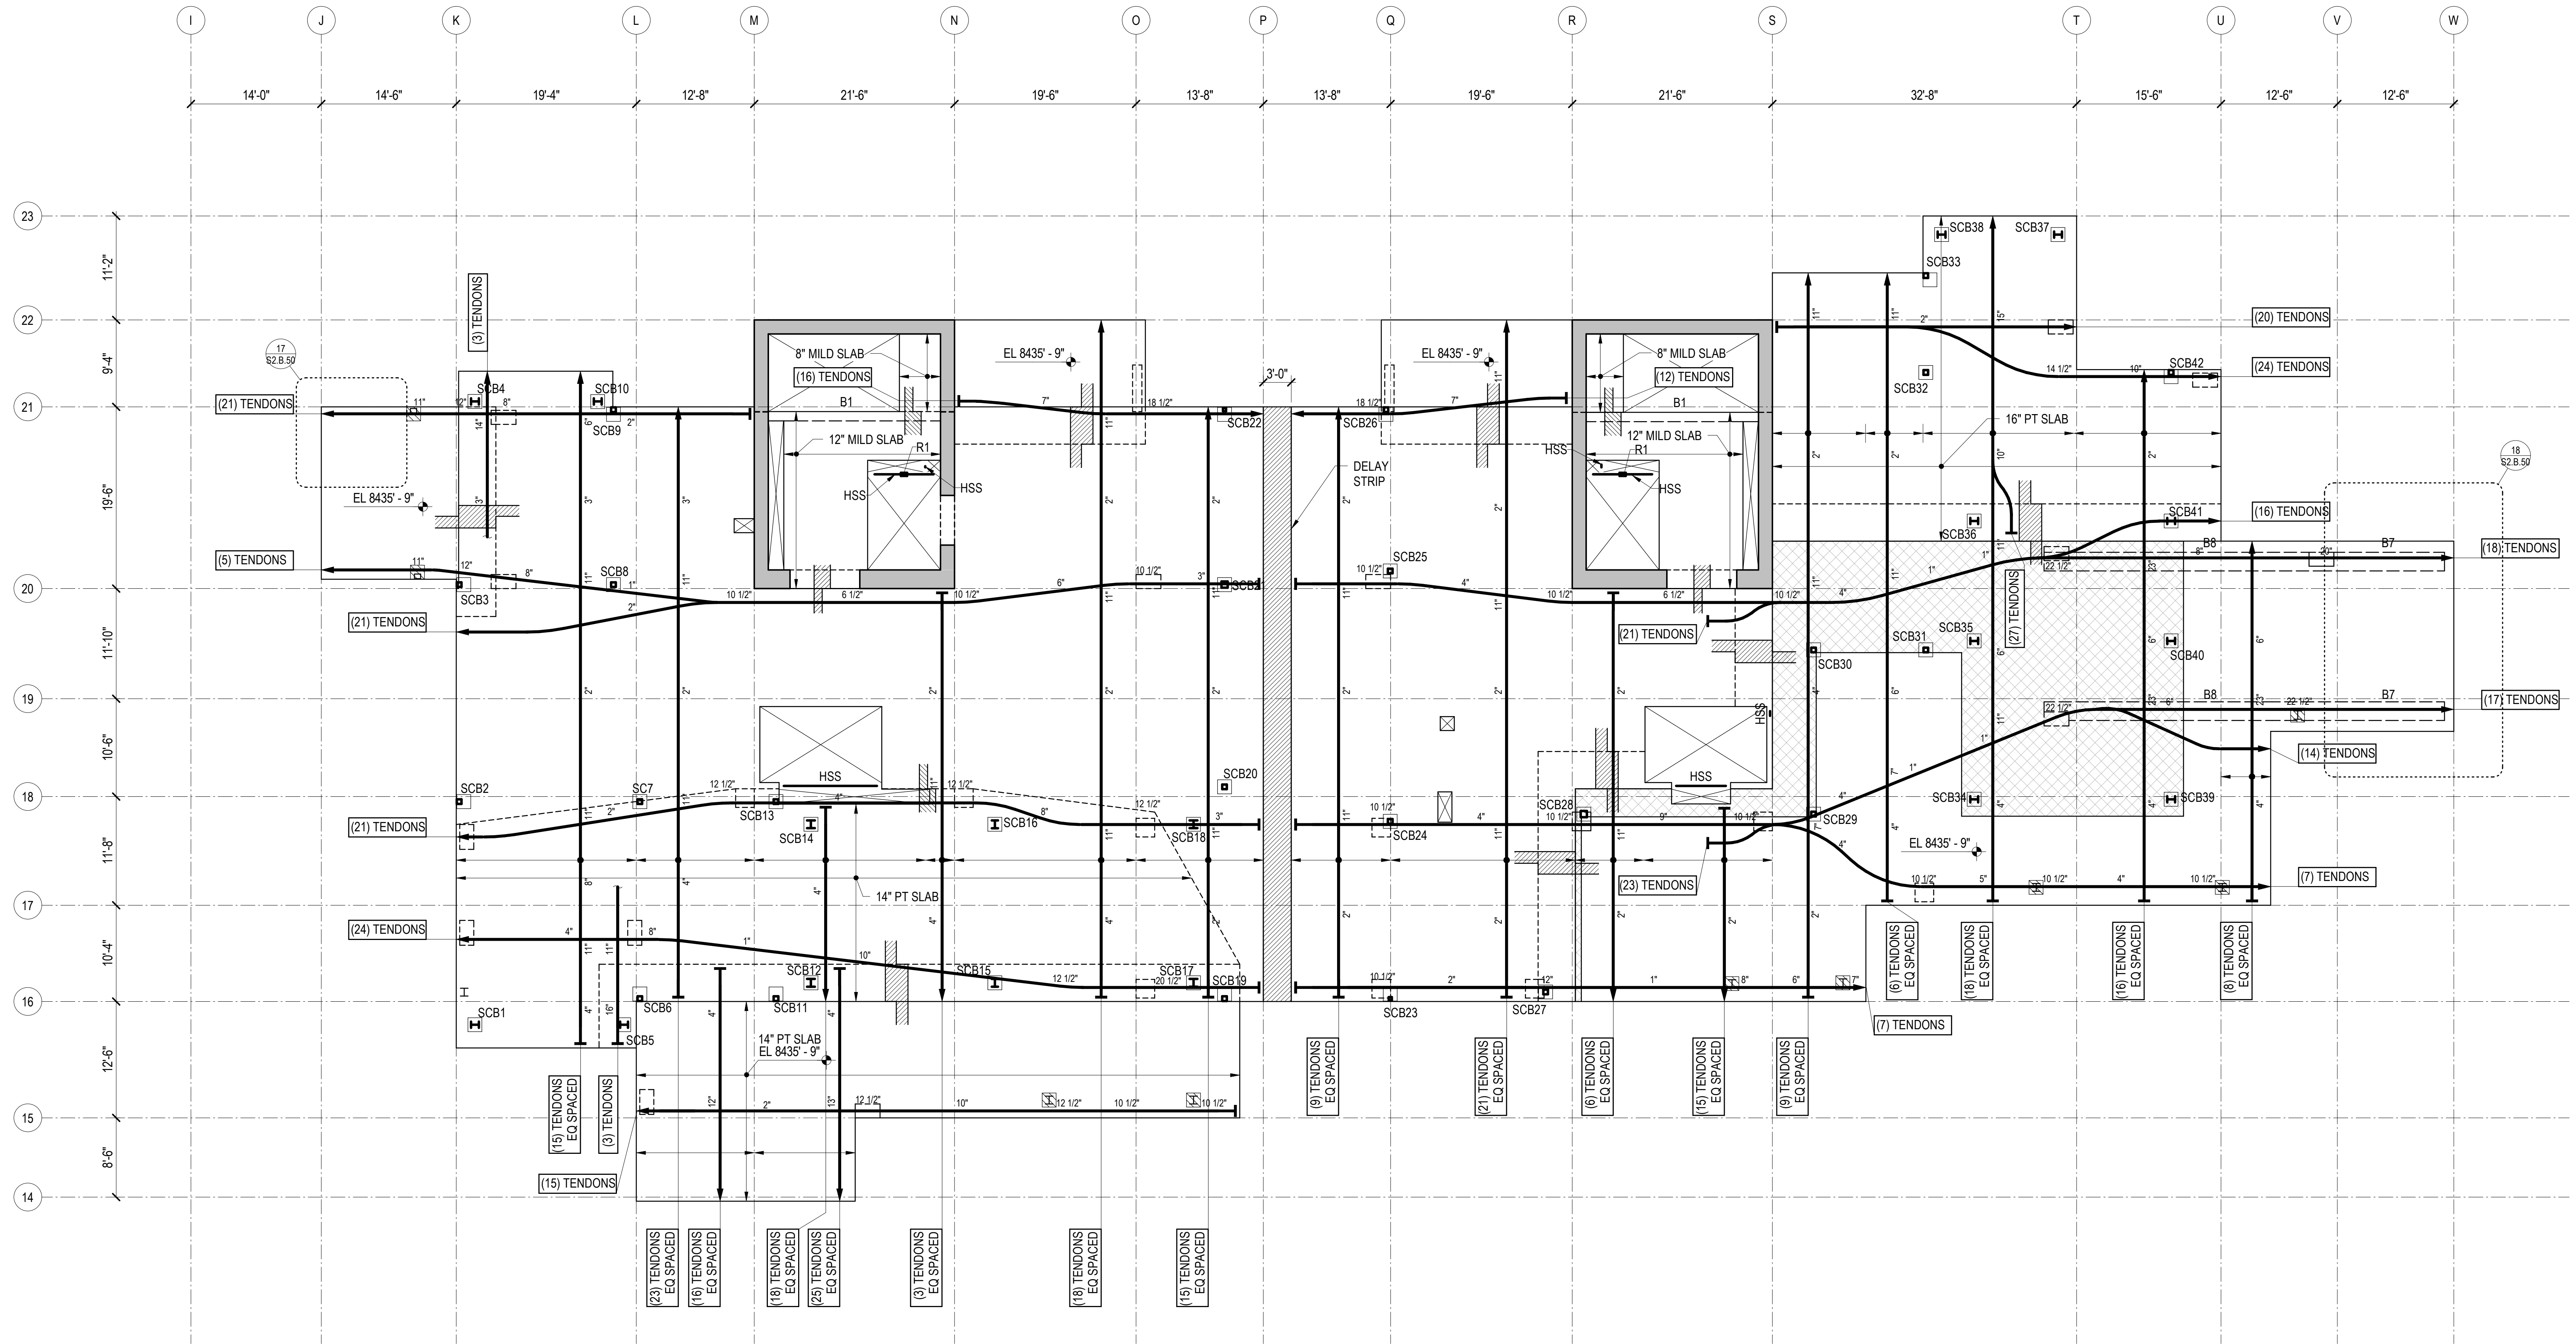

1 TOWER B - LEVEL 7 FRAMING PLAN  
1/8" = 1'-0"



REFERENCE DRAWINGS

S0.XX DRAWING INDEX, ABBREVIATIONS, LEGENDS, GENERAL NOTES  
S1.XX LOAD DIAGRAM  
S2.XX PLANS  
S3.XX ELEVATIONS  
S4.XX TYPICAL DETAILS AND SCHEDULES  
S5.XX CONCRETE SECTIONS AND DETAILS  
S6.XX STEEL SECTIONS AND DETAILS

NOTES

- REFERENCE FLOOR ELEVATION IS 8436' - 6". TOP OF STRUCTURAL CONCRETE SLAB IS 8436' - 5", UNLESS NOTED OTHERWISE. SEE ARCHITECTURAL DRAWINGS FOR DRAINAGE SLOPES NOT SHOWN.
- STRUCTURAL SLAB IS A 12-INCH THICK UNBONDED POST-TENSIONED TWO-WAY SLAB UNLESS NOTED OTHERWISE. SEE TYPICAL POST-TENSIONED SLAB DETAILS FOR ADDITIONAL INFORMATION.
- THE MINIMUM NUMBER OF REQUIRED POST-TENSIONING TENDONS IS SHOWN ON THE DRAWINGS. FINAL COUNT, LAYOUT, AND LIVE END LOCATION IS PER DEFERRED DESIGN-BUILD SUBMITTAL PROVIDED BY THE CONTRACTOR.
- CONCRETE PLACED IN THE SLAB/SHEAR WALL INTERSECTION, INCLUDING COUPLING BEAMS, SHALL HAVE MINIMUM CONCRETE STRENGTH EQUAL TO THAT SPECIFIED FOR THE SHEAR WALLS.
- CONCRETE PLACED IN THE SLAB/COLUMN INTERSECTION SHALL HAVE MINIMUM CONCRETE STRENGTH AS SHOWN IN THE GENERAL NOTES, BUT NO LESS THAN THAT SPECIFIED FOR THE COLUMNS DIVIDED BY 1.4.
- COORDINATE LOCATION OF ALL EMBEDS WITH MECHANICAL, ELECTRICAL, PLUMBING, AND EXTERIOR WALL SYSTEMS PRIOR TO CASTING THE SLAB.

- SEE ARCHITECTURAL, MECHANICAL, PLUMBING, ELECTRICAL, AND OTHER DISCIPLINES DRAWINGS FOR OPENING SIZES AND LOCATIONS NOT SHOWN ON PLAN. SEE "TYPICAL OPENINGS AND EMBEDMENTS IN CONCRETE" DETAILS FOR OPENING PLACEMENT CRITERIA. NOTIFY THE STRUCTURAL ENGINEER OF ANY OPENINGS NOT SHOWN ON THE STRUCTURAL DRAWINGS FOR WHICH THE TYPICAL DETAILS DO NOT APPLY.
- REFERENCE ALL CONSTRUCTION DOCUMENTS FOR SIZE, EXTENT, AND LOCATION OF CONCRETE CURBS, HOUSEKEEPING PADS, CMU WALLS, PLANTER WALLS, BOLLARDS, AND EDGE ANGLES. REINFORCE PER THE TYPICAL DETAILS.
- INDICATES POUR STRIPS. WAIT 28 DAYS MINIMUM AFTER PLACING SLAB CONCRETE PRIOR TO CASTING POUR STRIPS. SEE "TYPICAL POST-TENSIONED DELAY STRIP" DETAIL FOR MORE INFORMATION.
- INDICATES TYPICAL BUILT-UP SLAB ON RIGID FOAM. SEE ARCHITECTURAL DRAWINGS FOR LOCATIONS AND ELEVATIONS OF ARCHITECTURAL BUILT-UP SLABS. SEE TYPICAL BUILT-UP SLAB DETAIL FOR ADDITIONAL INFORMATION.
- "SC#" INDICATES STEEL COLUMN MARK FOR COLUMNS NOT LOCATED BY GRID. SEE TYPICAL STEEL COLUMN DETAILS AND SCHEDULE FOR ADDITIONAL INFORMATION.

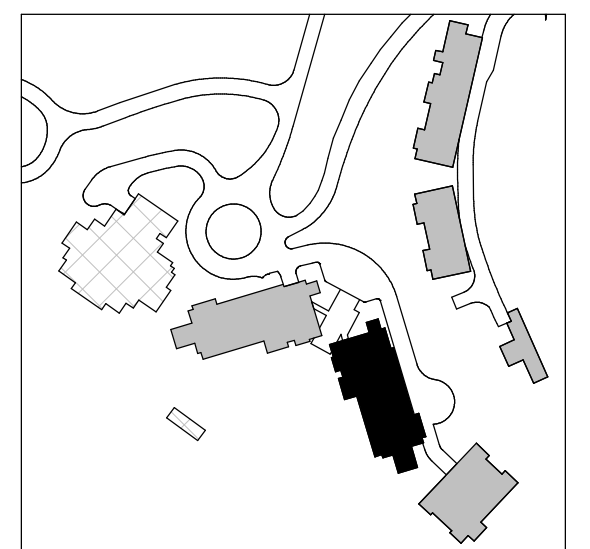

principal architect \_\_\_\_\_  
project manager \_\_\_\_\_  
drawn by \_\_\_\_\_  
checked by \_\_\_\_\_  
job no. 20052  
date 05/17/2024

revisions:

3	8/19/2024	ASI/004
	04/08/2024	IFC SET 1 OF 3
	11/18/2022	95% CD
no.	date	by

















IFC SET 2 OF 3

05/17/2024

TOWER B LEVEL 7  
FRAMING PLAN

S2.B.17



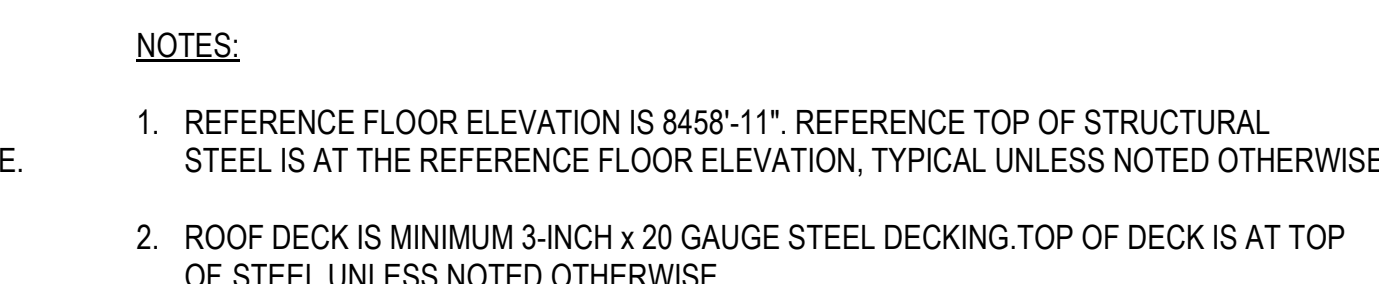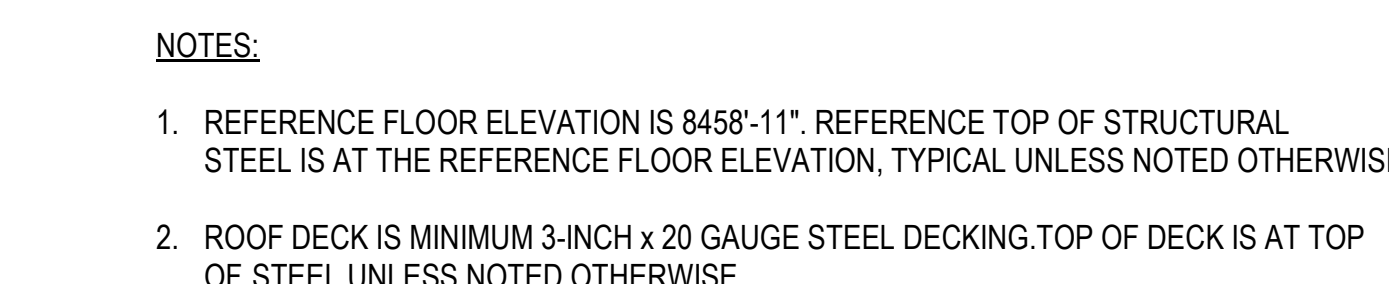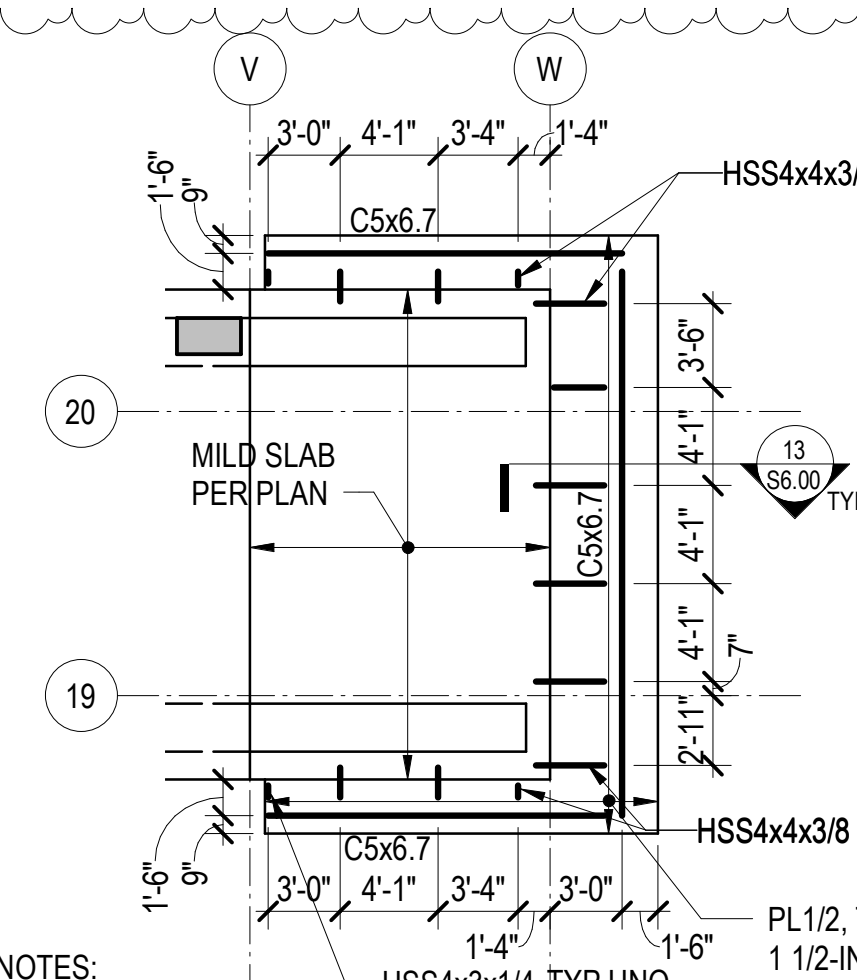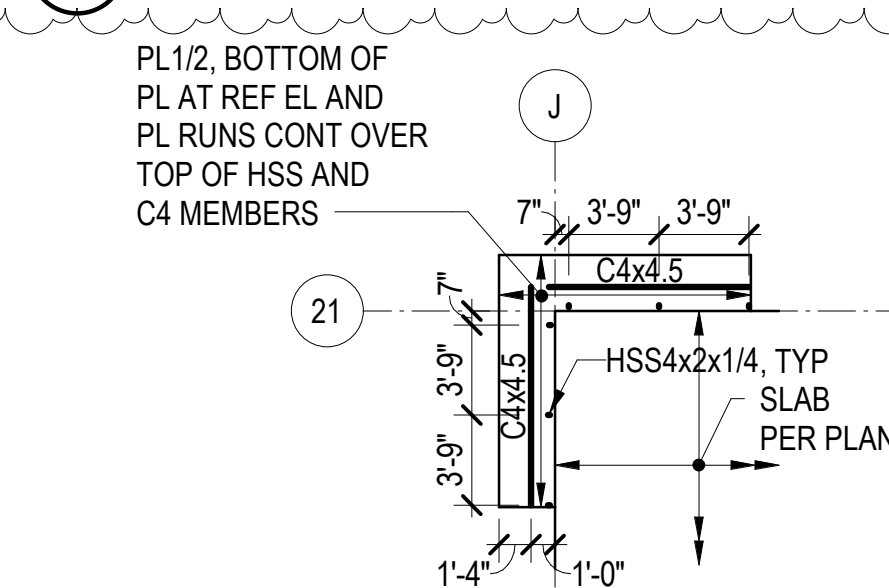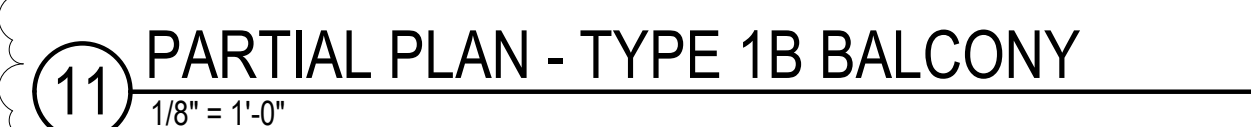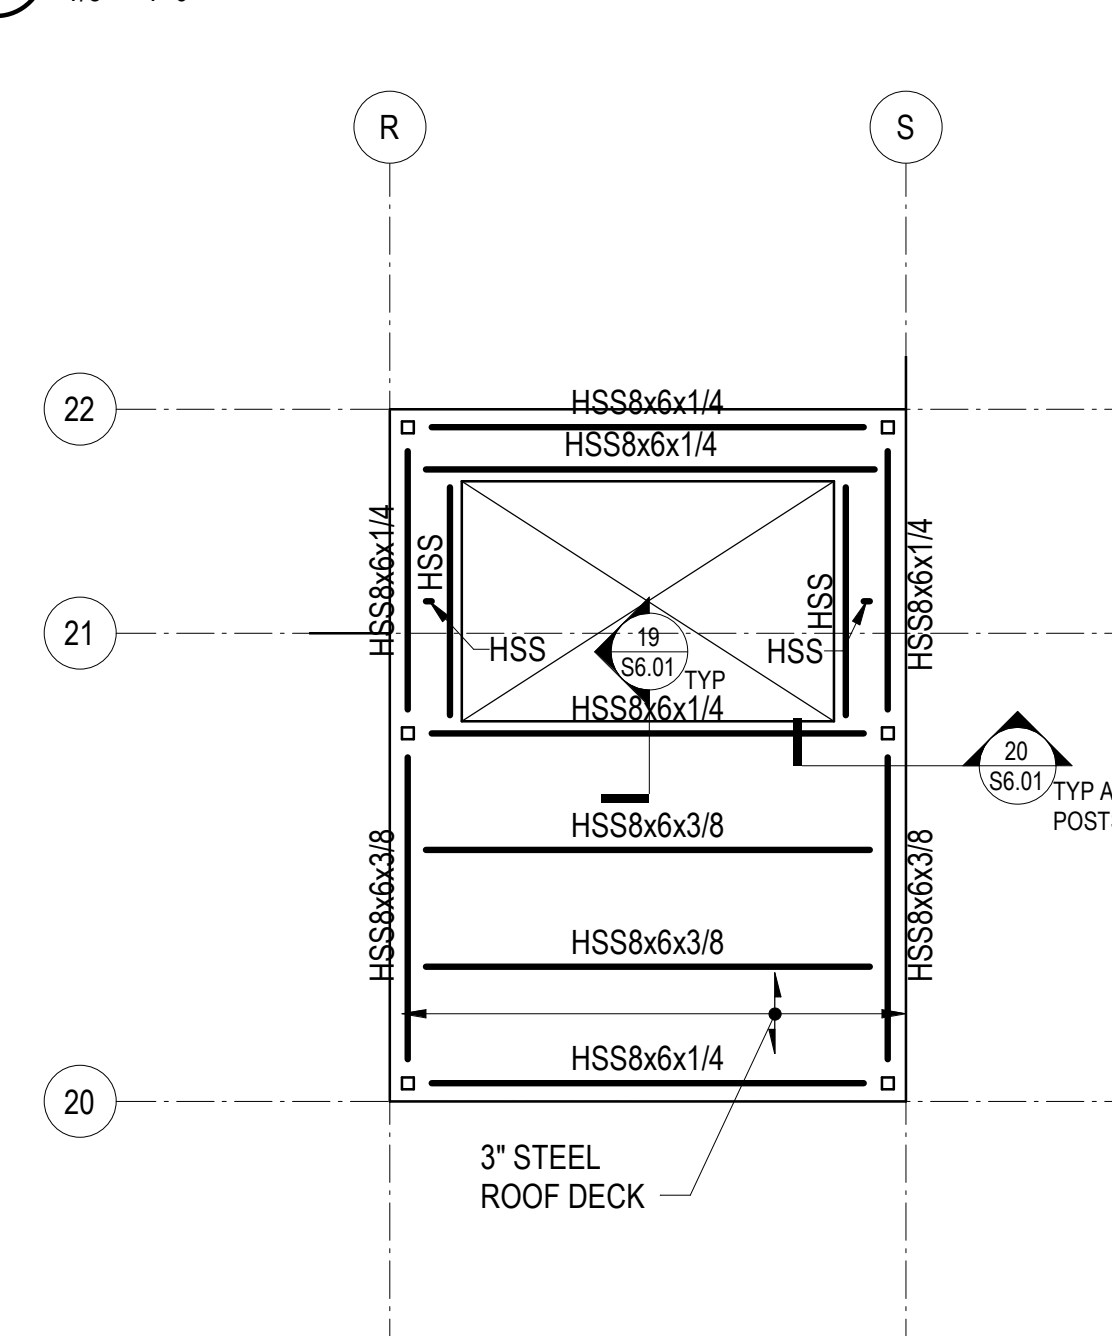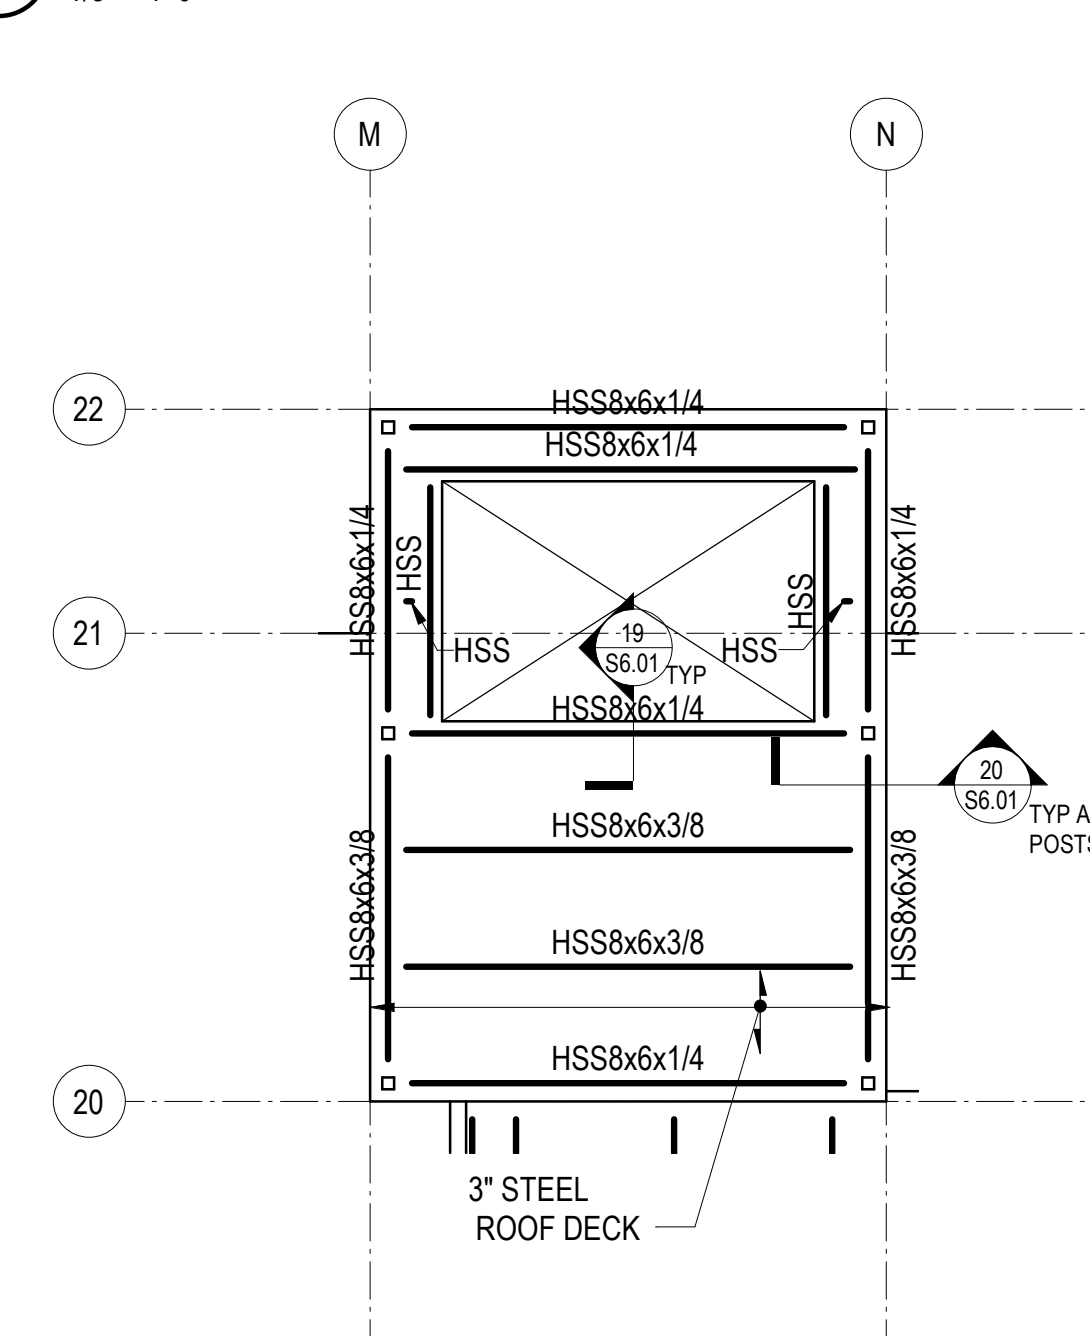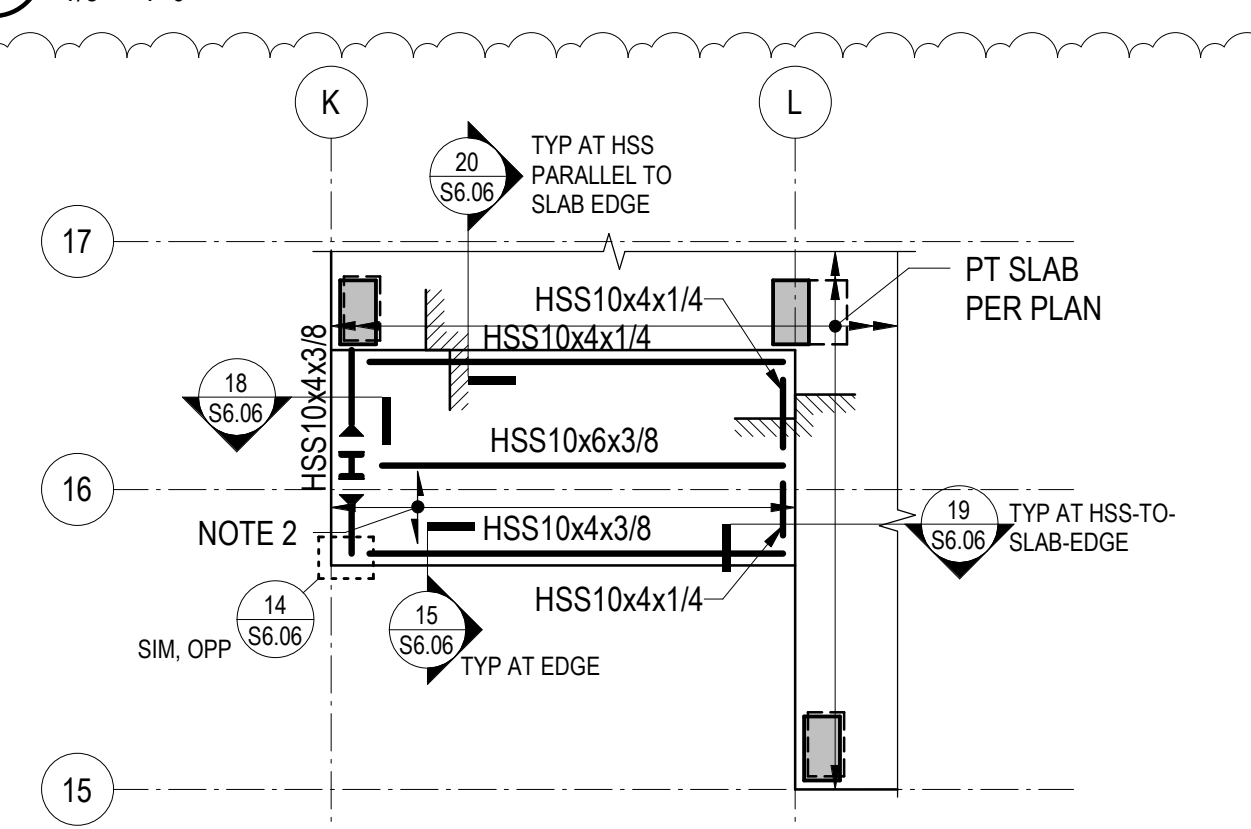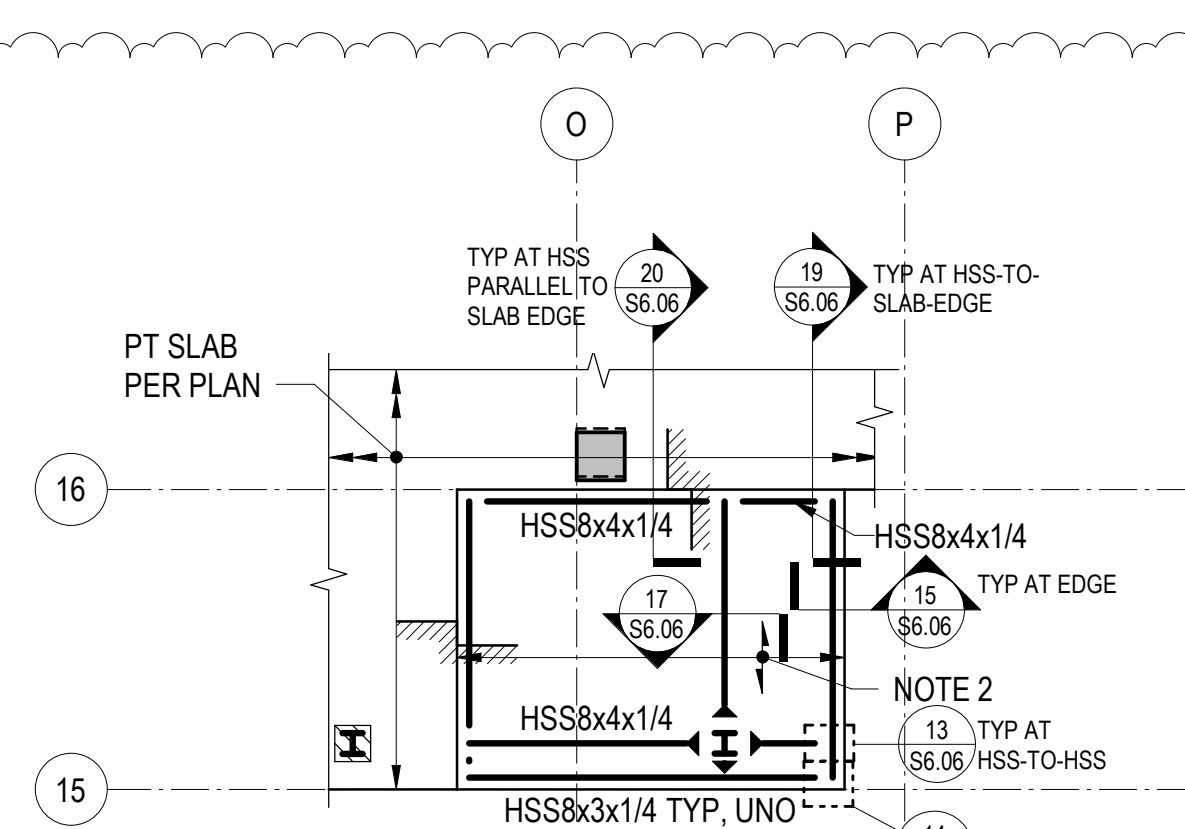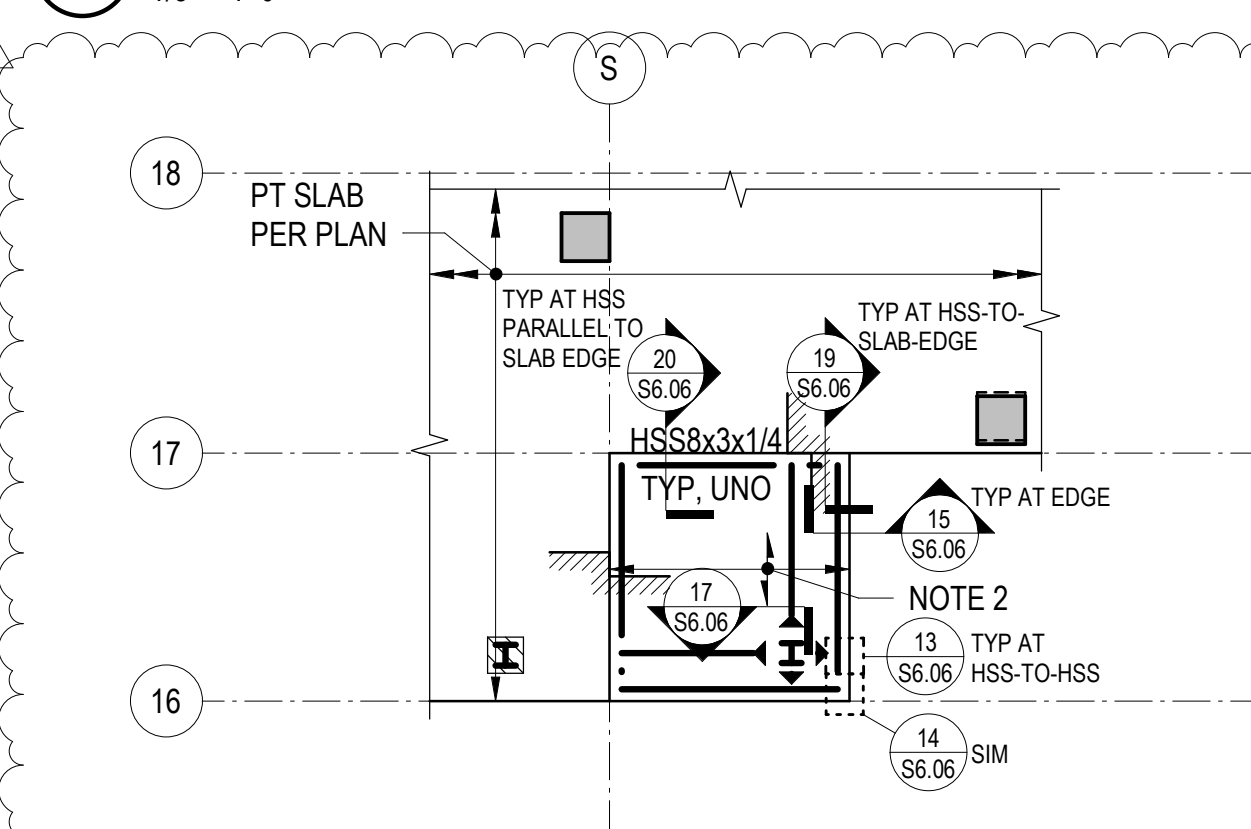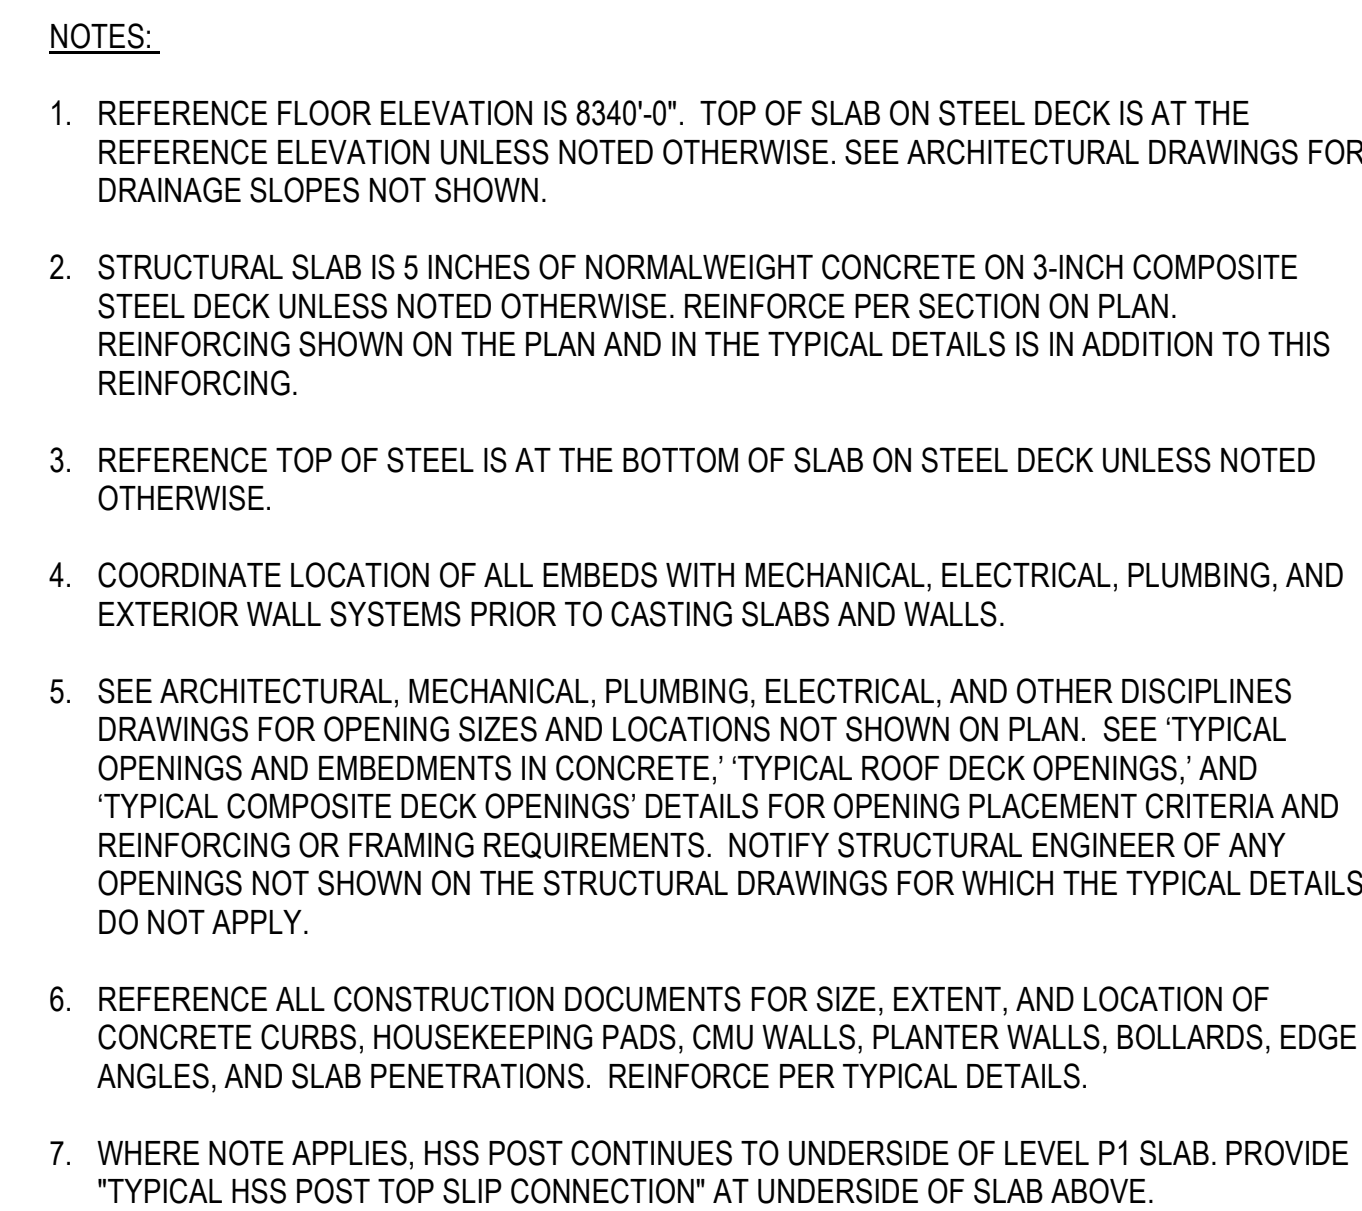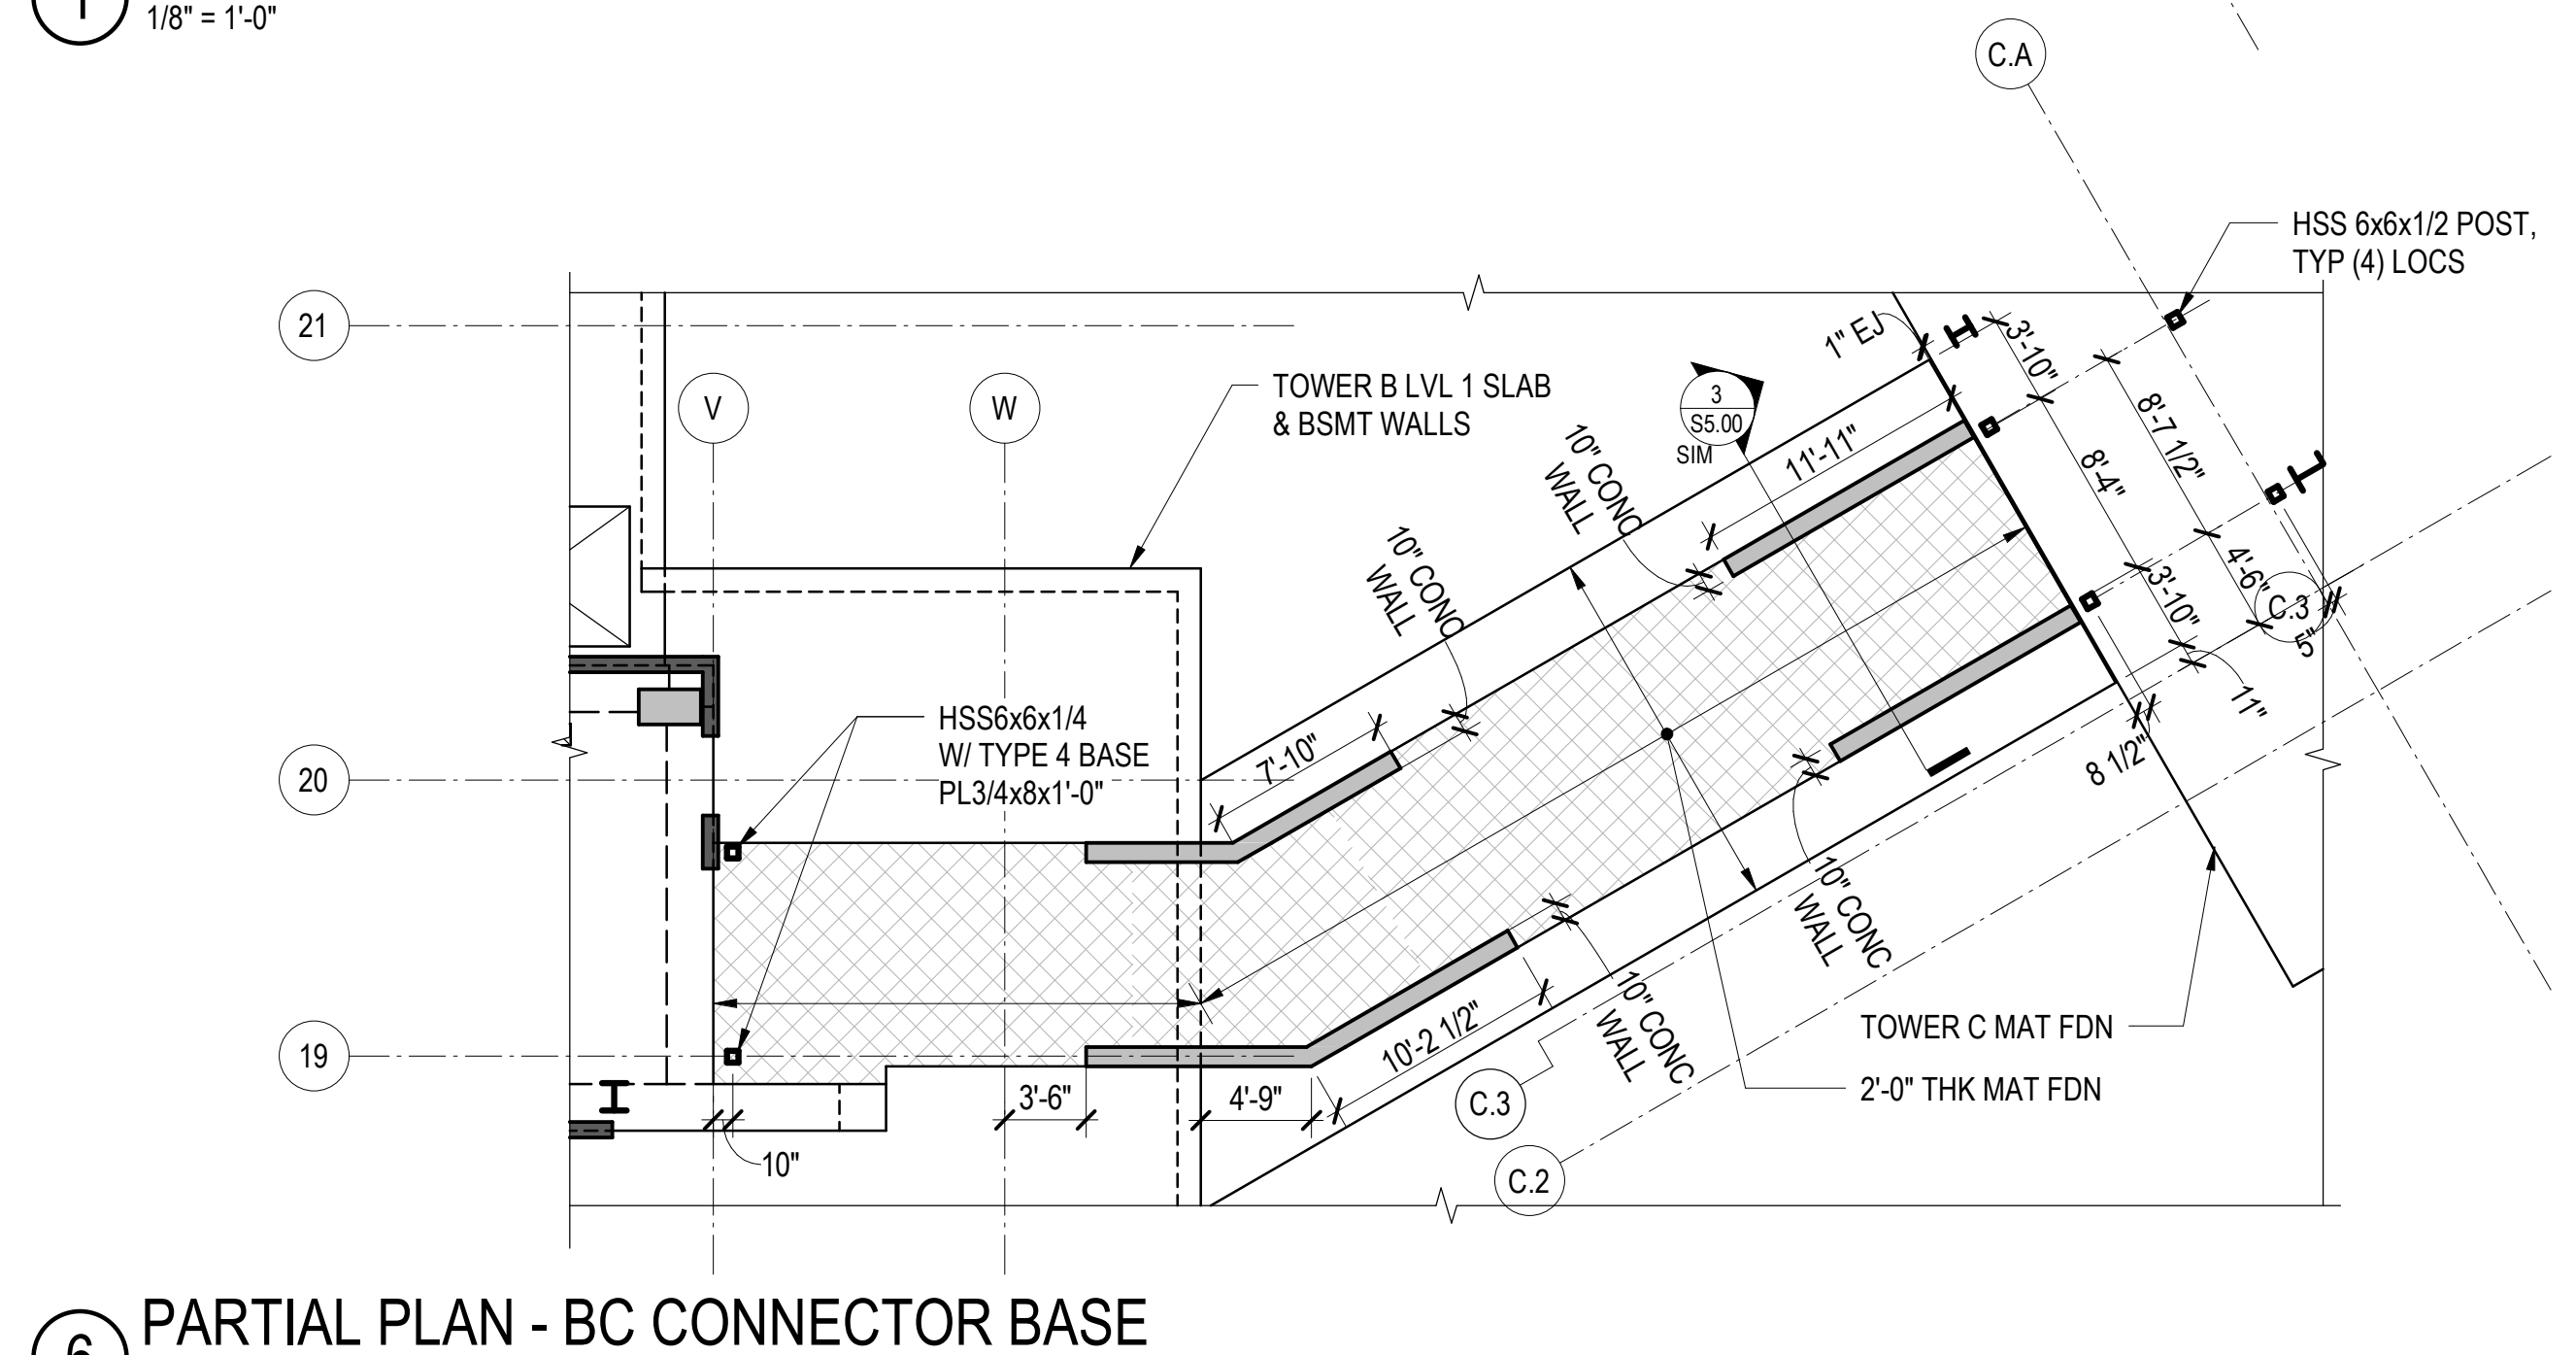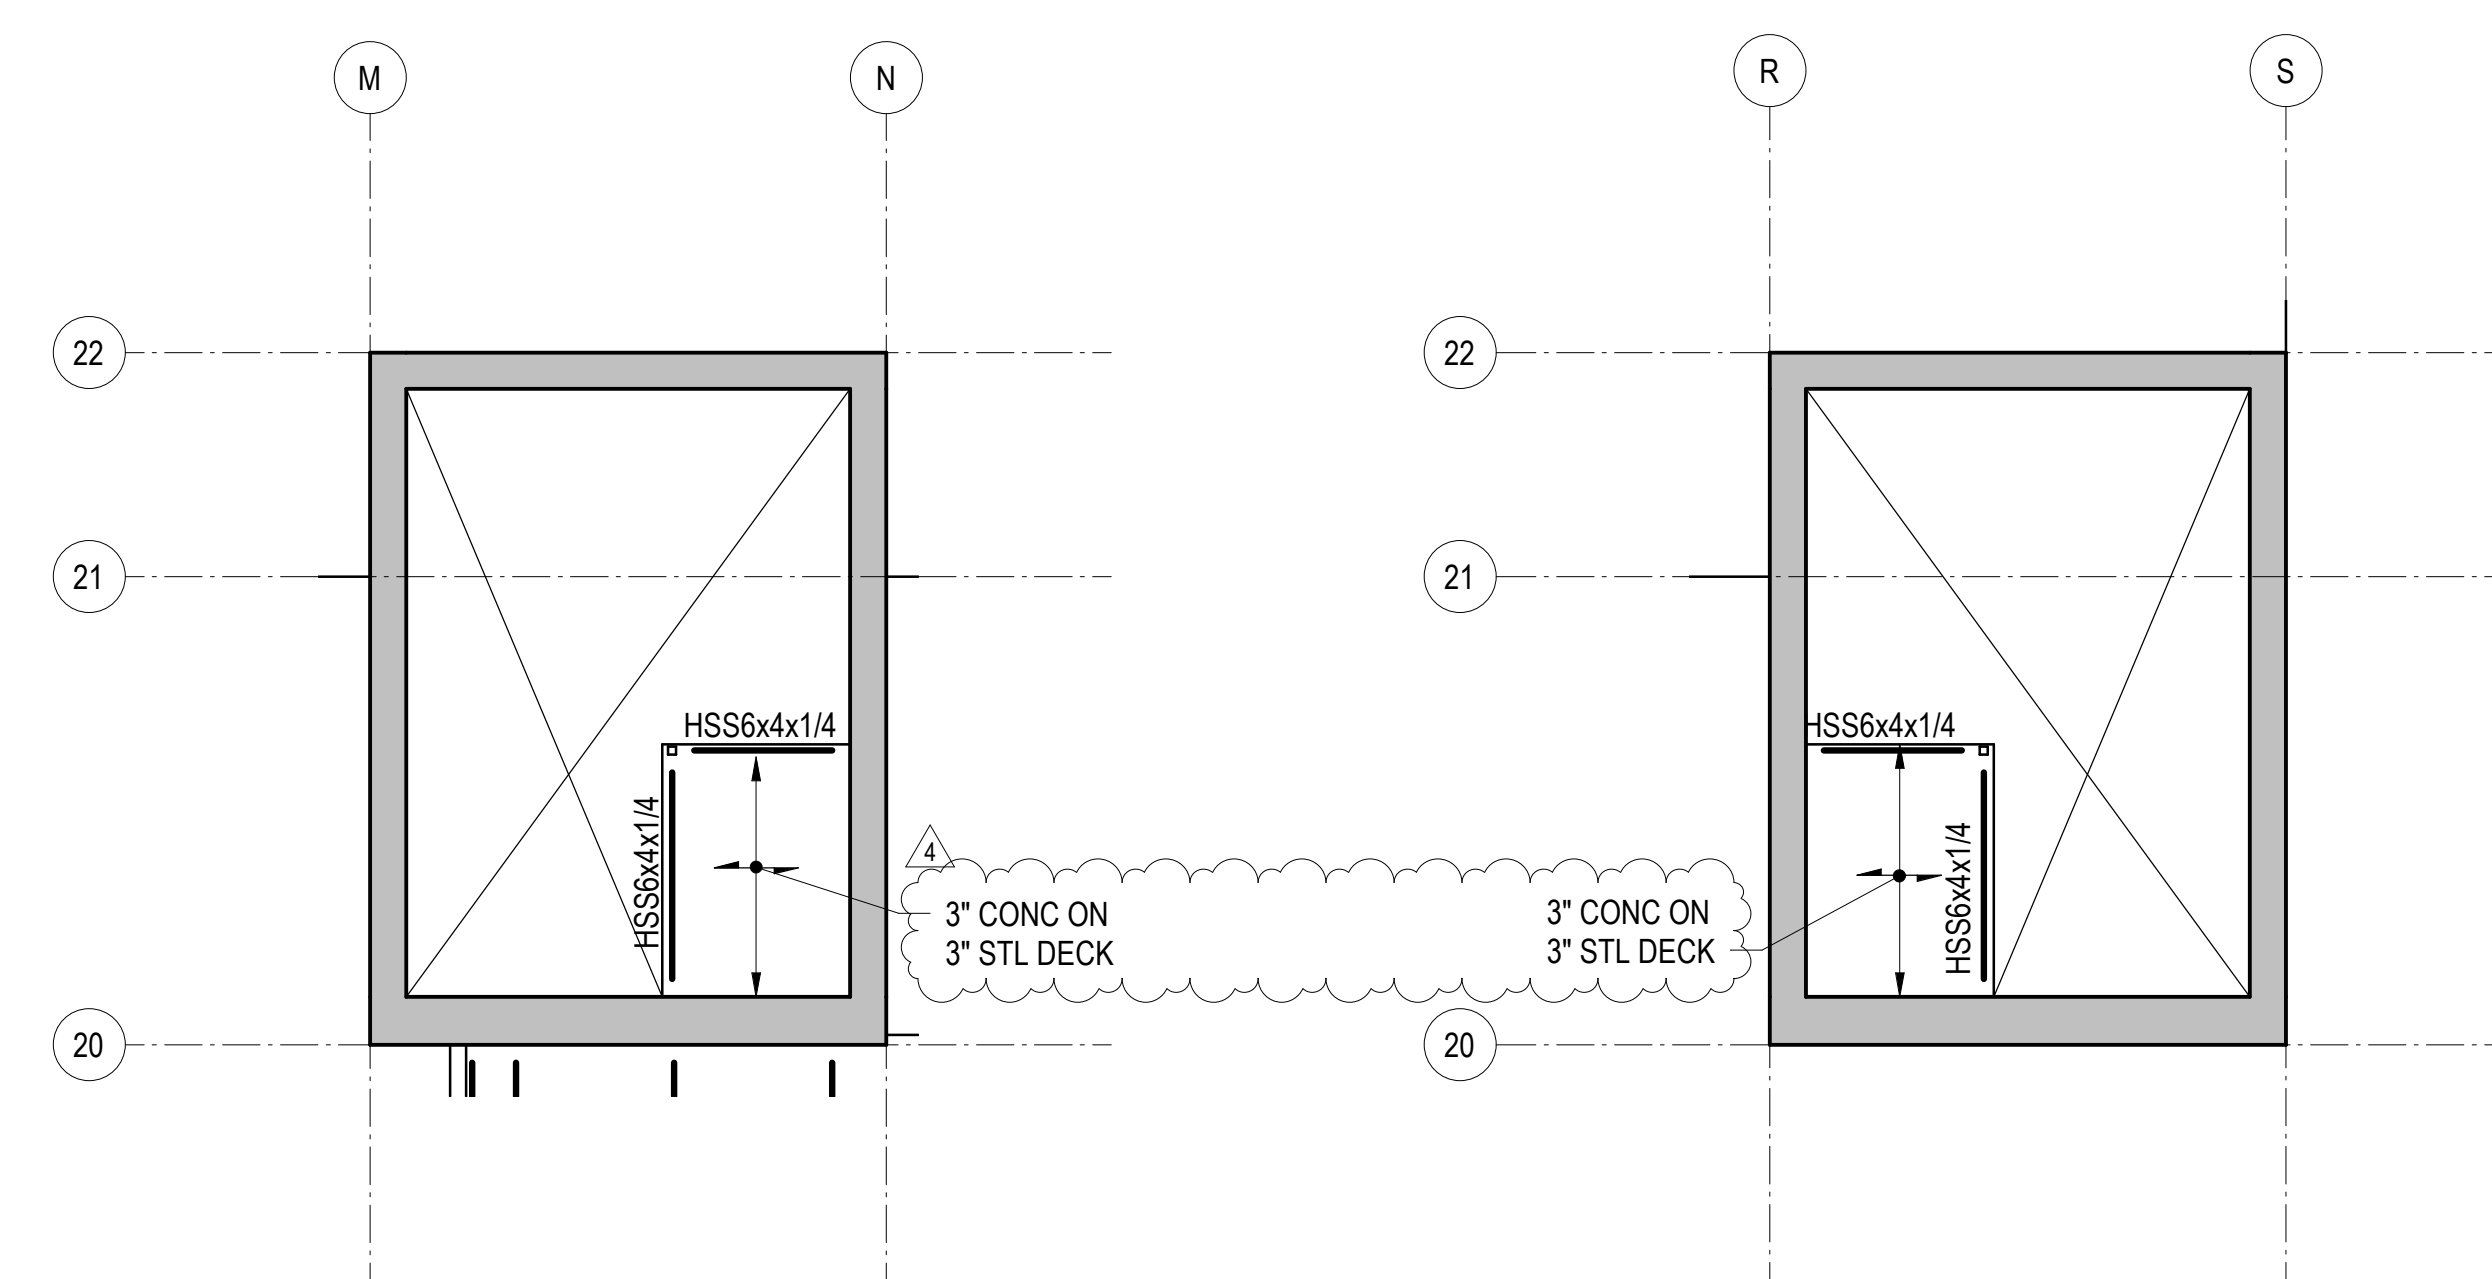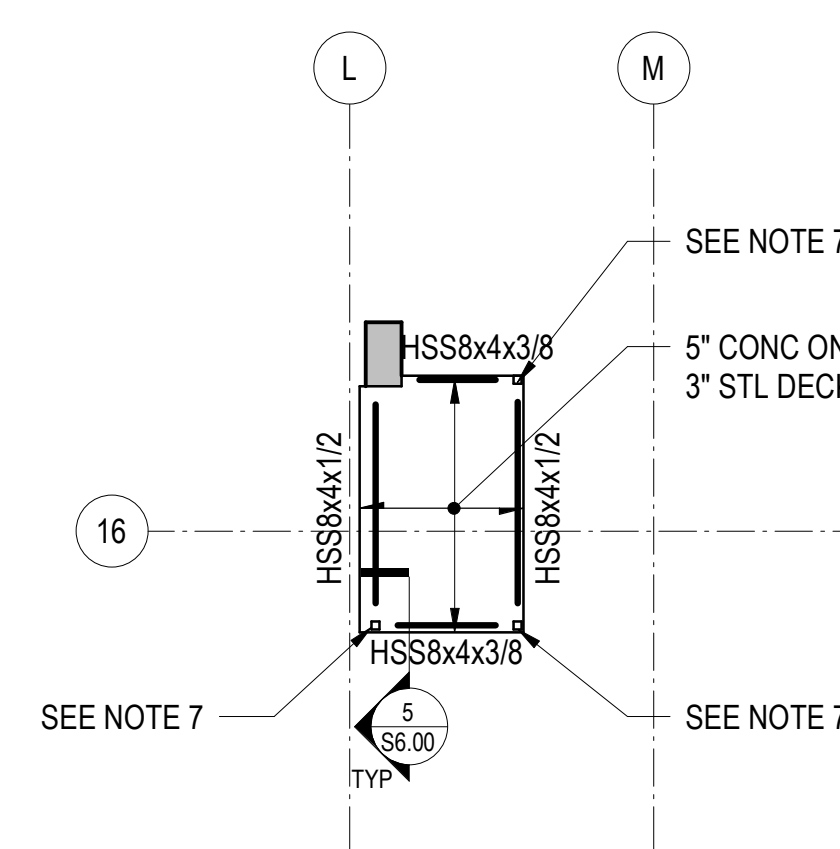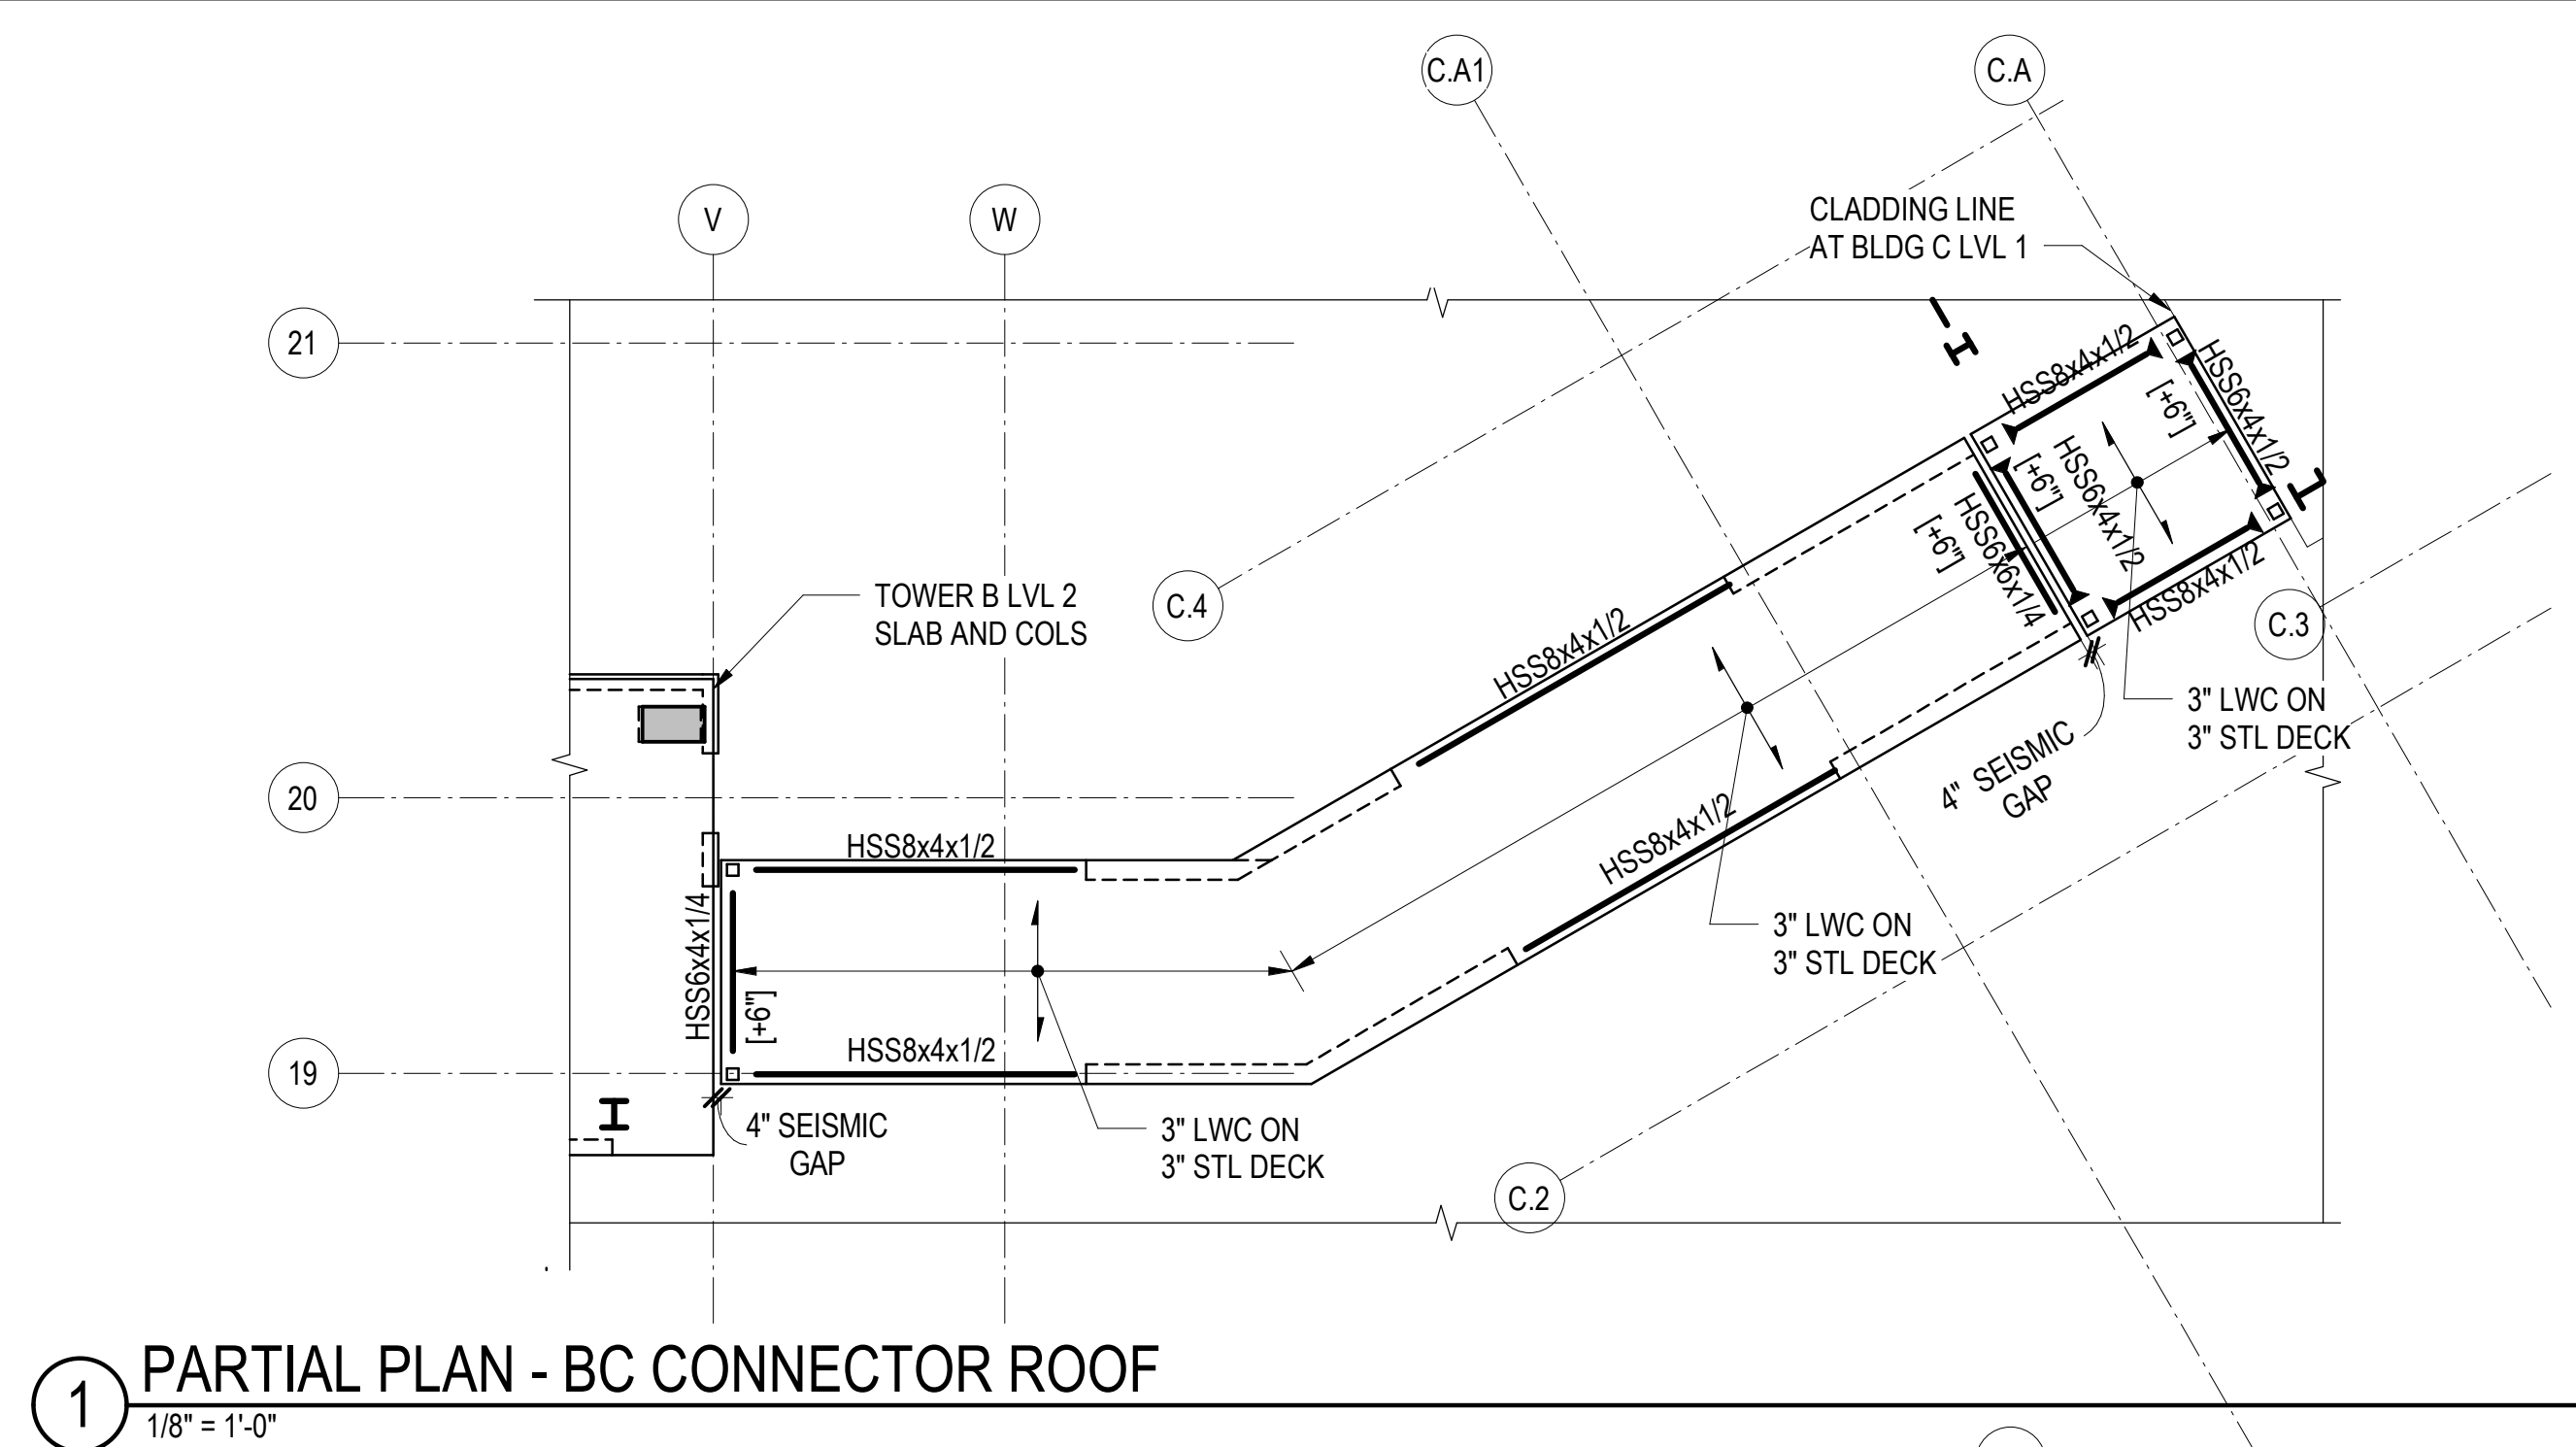

Reserved for permit stamp

159 South Jackson St, Suite 600  
Seattle, Washington 98104 USA  
1 206 624 5670 [olsonkunding.com](mailto:olsonkunding.com)

# Olson Kundig

Project: **SOMMET BLANC - ABC**  
**DEER VALLEY, UTAH**

MAGNUSSON  
KLEMENCIC  
ASSOCIATES

Structural + Civil Engineering

Seattle Chicago  
www.mika.com  
206.292.1200

principal architect \_\_\_\_\_  
project manager \_\_\_\_\_  
drawn by \_\_\_\_\_

checked by \_\_\_\_\_  
job no. 20052  
date 05/17/2024

revisions:

5	01/07/2025	ASI-007
4	01/07/2025	ASI-006
2	7/26/2024	ASI-002
	04/08/2024	IFC SET 1 OF 3
	11/18/2022	95% CD
no.	date	by

IFC SET 2 OF 3

05/17/2024

TOWER B PARTIAL  
PLANS

**S2.B.50**











S0.XX	DRAWING INDEX, ABBREVIATIONS, LEGENDS, GENERAL NOTES
S1.XX	LOAD DIAGRAMS
S2.XX	PLANS
S3.XX	ELEVATIONS
S4.XX	TYPICAL DETAILS AND SCHEDULES
S5.XX	CONCRETE SECTIONS AND DETAILS
S6.XX	STEEL SECTIONS AND DETAILS

1. REFERENCE FLOOR ELEVATION IS 8390' - 6". TOP OF STRUCTURAL CONCRETE SLAB IS 8390' - 5". UNLESS NOTED OTHERWISE, SEE ARCHITECTURAL DRAWINGS FOR DRAINAGE SLOPES NOT SHOWN.
2. STRUCTURAL SLAB IS A 10-INCH THICK UNBONDED POST-TENSIONED TWO-WAY SLAB UNLESS NOTED OTHERWISE. SEE TYPICAL POST-TENSIONED SLAB DETAILS FOR ADDITIONAL INFORMATION.
3. THE MINIMUM NUMBER OF REQUIRED POST-TENSIONING TENDONS IS SHOWN ON THE DRAWINGS. FINAL COUNT, LAYOUT, AND LIVE END LOCATION IS PER DEFERRED DESIGN-BUILD SUBMITTAL PROVIDED BY THE CONTRACTOR.
4. CONCRETE PLACED IN THE SLAB/SHEAR WALL INTERSECTION, INCLUDING COUPLING BEAMS, SHALL HAVE MINIMUM CONCRETE STRENGTH EQUAL TO THAT SPECIFIED FOR THE SHEAR WALLS.
5. CONCRETE PLACED IN THE SLAB/COLUMN INTERSECTION SHALL HAVE MINIMUM CONCRETE STRENGTH AS SHOWN IN THE GENERAL NOTES, BUT NO LESS THAN THAT SPECIFIED FOR THE COLUMNS DIVIDED BY 1.4.
6. COORDINATE LOCATION OF ALL EMBEDS WITH MECHANICAL, ELECTRICAL, PLUMBING, AND EXTERIOR WALL SYSTEMS PRIOR TO CASTING THE SLAB.

- 





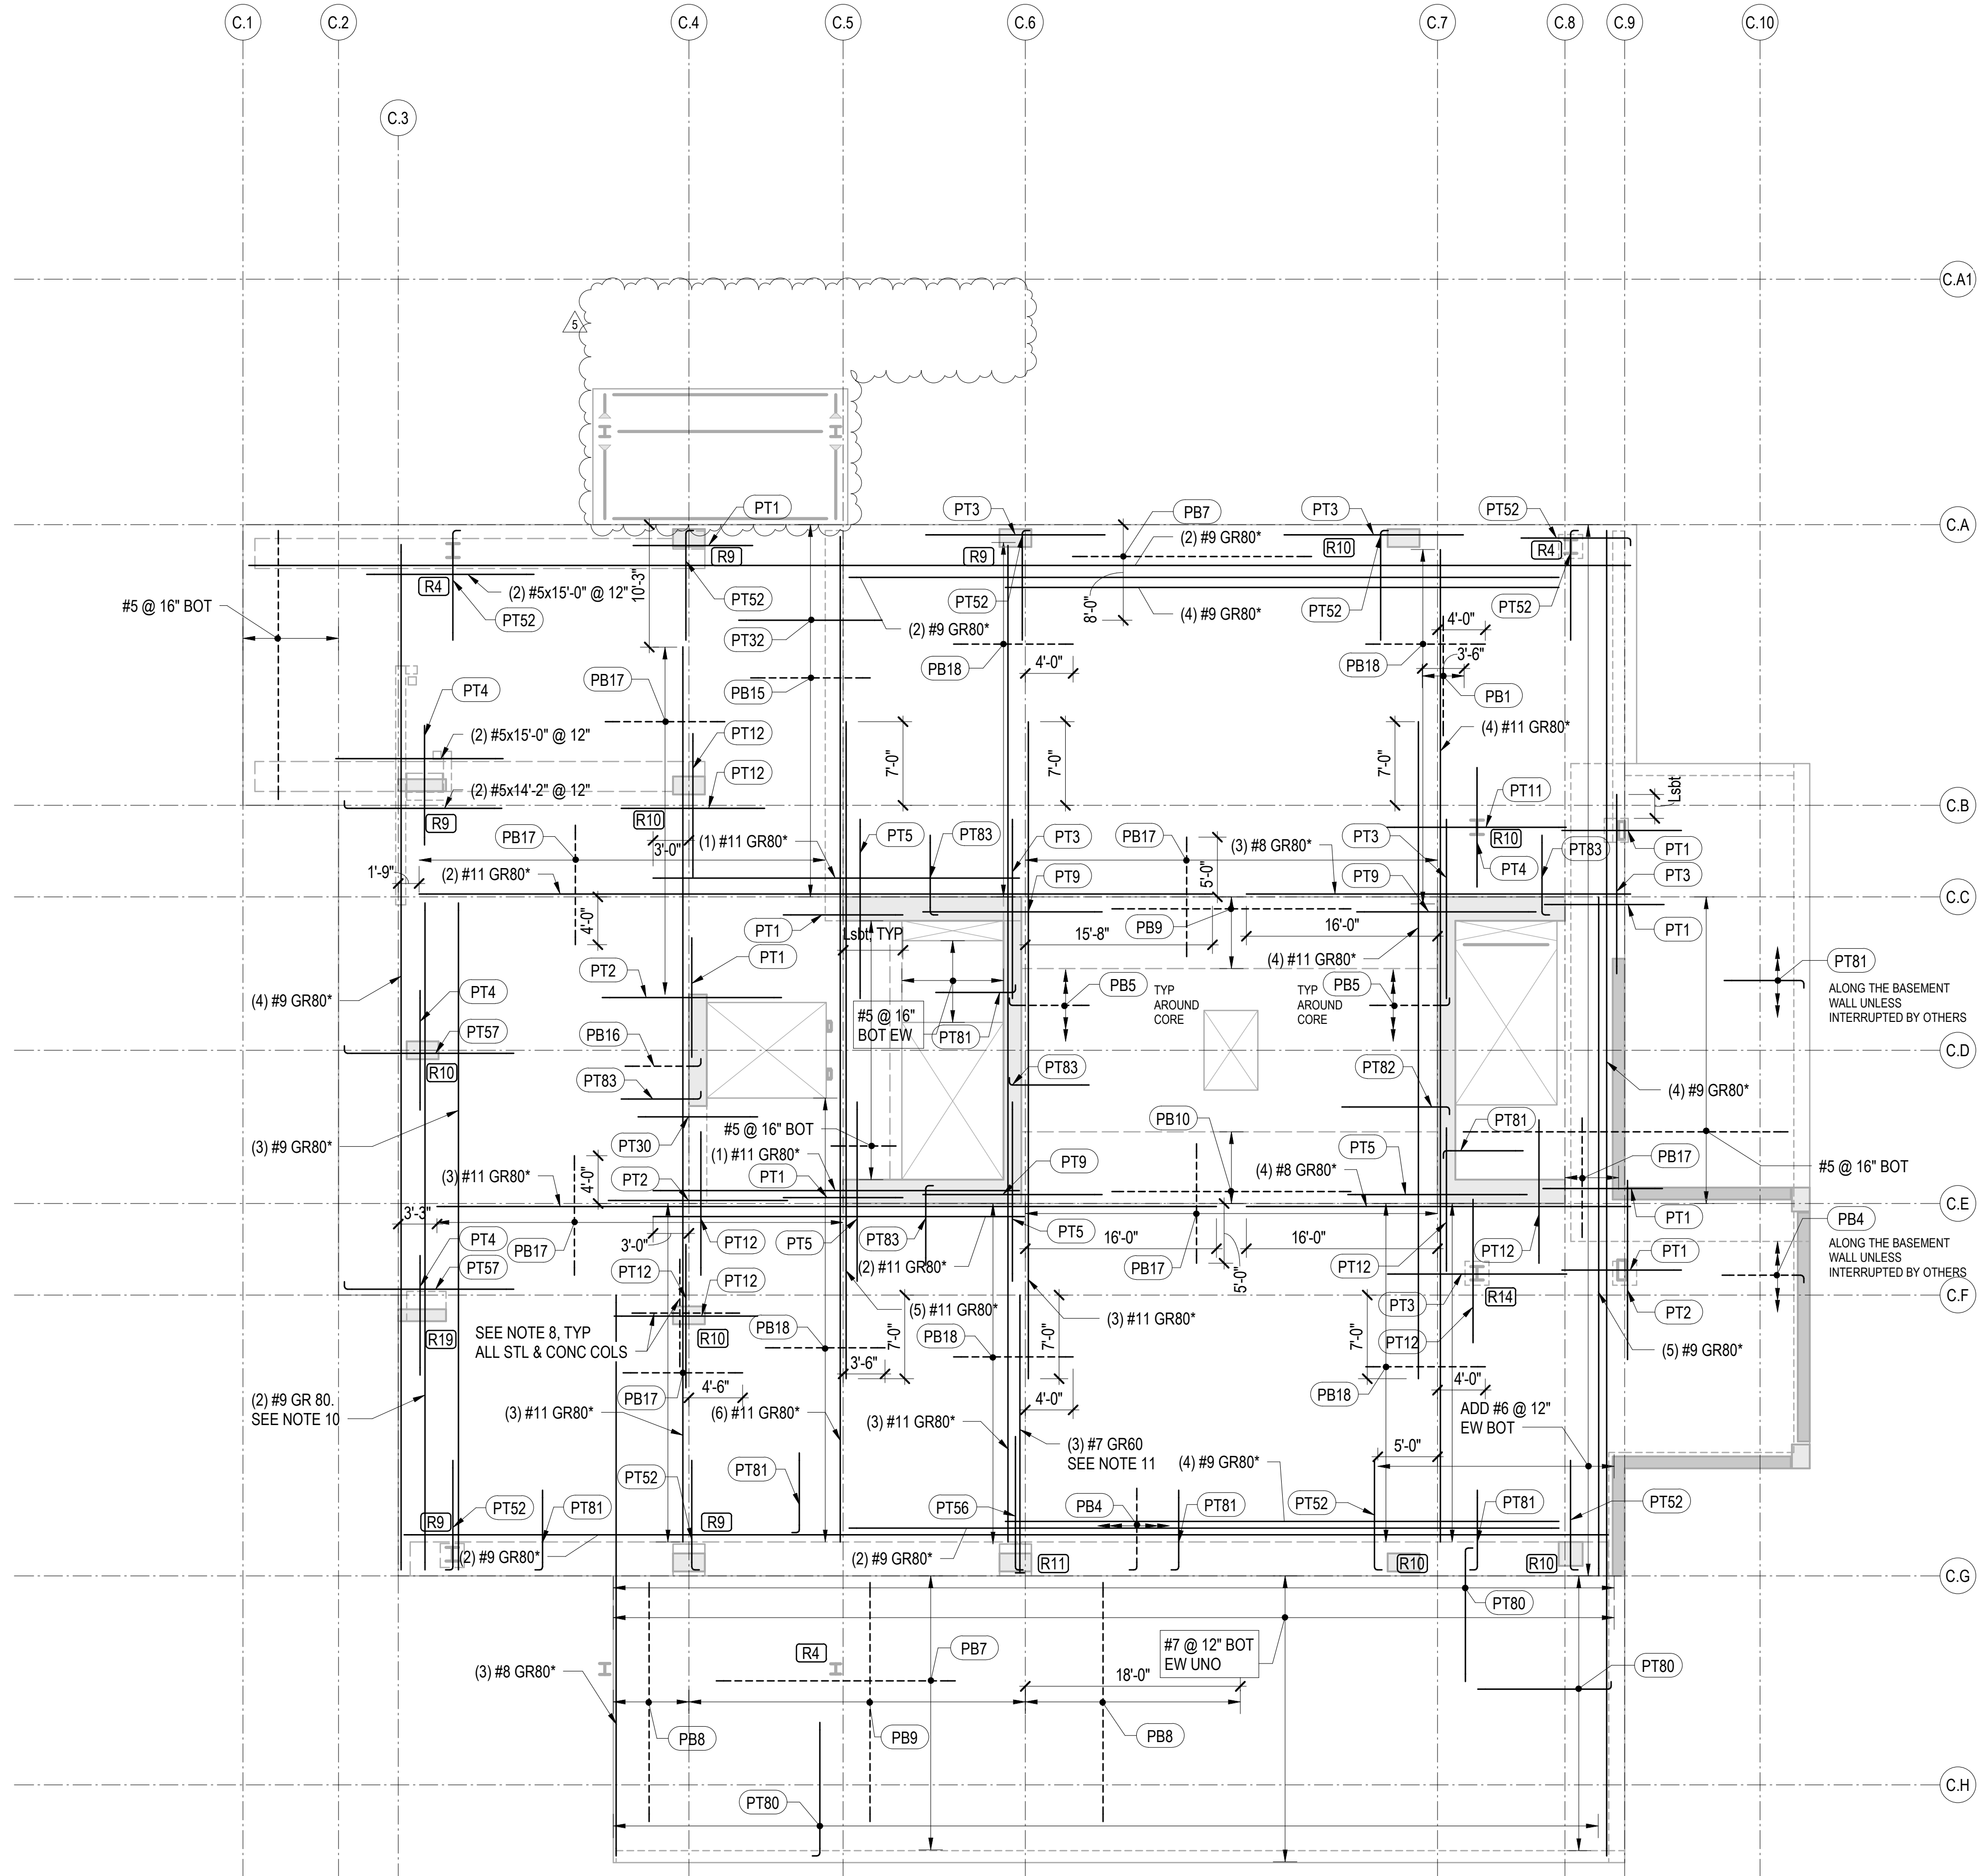

## 1 TOWER C - LEVEL 2 - REINFORCEMENT PLAN

1/8" = 1'-0"




### REINFORCING NOTES:

- SEE "GENERAL NOTES" FOR REINFORCING REQUIREMENTS.
- SEE "TYPICAL POST-TENSIONED SLAB DETAILS" FOR ADDITIONAL INFORMATION.
- SLAB REINFORCING SHALL BE PLACED IN THE FOLLOWING SEQUENCE:  
BOT BARS IN DIRECTION OF DISTRIBUTED TENDONS  
BOT BARS IN DIRECTION OF BANDED TENDONS  
TOP BARS IN DIRECTION OF BANDED TENDONS  
TOP BARS IN DIRECTION OF DISTRIBUTED TENDONS
- [RX] INDICATES STUD RAIL. STUD RAILS SHALL BE PLACED AT ALL COLUMNS. SEE "TYPICAL STUD RAIL REINFORCEMENT AT COLUMNS" DETAIL AND STUD RAIL SCHEDULE.
- SEE "TYPICAL CONCRETE OPENINGS AND EMBEDMENTS" FOR ADDITIONAL REINFORCEMENT REQUIREMENTS. NOTIFY STRUCTURAL ENGINEER OF ANY OPENINGS NOT SHOWN ON THE STRUCTURAL DRAWINGS FOR WHICH THE TYPICAL DETAILS DO NOT APPLY. ADDITIONAL REINFORCEMENT MAY BE REQUIRED.
- WHERE BAR LENGTH CANNOT BE ACHIEVED DUE TO SLAB EDGE, HOOK BAR.
- WHERE NOTES AS "HOOKED", PROVIDE 90 OR 180 DEGREE HOOK AS SHOWN ON PLAN. NOTED BAR LENGTH IS LENGTH OF STRAIGHT PORTION OF BAR.
- PROVIDE INTEGRITY BOTTOM BARS PER STUD RAIL SCHEDULE AT ALL COLUMNS. CENTER REINFORCEMENT ON COLUMNS AND PLACE INTEGRITY BARS EACH WAY WITHIN COLUMN VERTICAL REINFORCEMENT. TRIM AND HOOK AT SLAB EDGE AS REQUIRED.
- \* INDICATES DIAPHRAGM REINFORCEMENT THAT IS PART OF THE LATERAL FORCE RESISTING SYSTEM AND IS IN ADDITION TO OTHER BARS SHOWN. THIS REINFORCEMENT SHALL BE CENTERED IN SLAB MID-DEPTH. UNO. REINFORCEMENT SHALL MEET CENTER-TO-CENTER SPACING OF 3db BUT NOT LESS THAN 3-INCHES, UNLESS NOTED OTHERWISE. LAP LSP AS REQUIRED, STAGGER LAPS.

- WHERE NOTE APPLIES, REINFORCEMENT IS DIAPHRAGM REINFORCEMENT THAT IS PART OF THE LATERAL FORCE RESISTING SYSTEM AND IN ADDITION TO OTHER BARS SHOWN. REINFORCEMENT IS TO BE PLACED WITHIN VERTICALS OF COLUMN NEAR GRID C.3/C.F. REINFORCEMENT SHALL BE CENTERED IN SLAB MID-DEPTH. REINFORCEMENT SHALL MEET CENTER-TO-CENTER SPACING OF 3db BUT NOT LESS THAN 3-INCHES, UNLESS NOTED OTHERWISE. LAP SPLICE IS NOT PERMITTED; PROVIDE MECHANICAL COUPLER IF NECESSARY.
- WHERE NOTE APPLIES, REINFORCEMENT IS TO BE PLACED WITHIN VERTICALS OF COLUMN NEAR GRID C.6/C.G. WITH TERMINATOR AT SOUTH END. REINFORCEMENT SHALL BE CENTERED IN SLAB MID-DEPTH. REINFORCEMENT SHALL MEET CENTER-TO-CENTER SPACING OF 3db BUT NOT LESS THAN 3-INCHES, UNLESS NOTED OTHERWISE. LAP SPLICE IS NOT PERMITTED; PROVIDE MECHANICAL COUPLER IF NECESSARY.

PT TOP REINFORCEMENT SCHEDULE		
MARK	REINFORCING	REMARKS
PT1	(6) #5x10'-0"	
PT2	(6) #5x15'-0"	
PT3	(8) #5x15'-0"	
PT4	(12) #5x10'-0"	
PT5	(10) #5x15'-0"	
PT6	(18) #5x12'-0" @ 5'	STAGGER 3'-0"
PT7	(14) #5x10'-0"	
PT9	(14) #5x15'-0"	
PT11	(13) #5x15'-0"	
PT12	(10) #5x12'-0"	
PT30	#5x10'-0" @ 15"	
PT32	#6x12'-0" @ 6"	
PT50	(4) #5x6'-8"	HOOK AT END
PT51	(6) #5x6'-8"	HOOK AT END
PT52	(10) #5x9'-2"	HOOK AT END
PT54	(6) #5x14'-2"	HOOK AT END
PT56	(16) #5x11'-2"	HOOK AT END
PT57	(10) #5x14'-2"	HOOK AT END
PT60	(12) #5x9'-2"	HOOK AT END
PT80	#5x11'-2" @ 10"	HOOK AT END
PT81	#5x6'-8" @ 10"	HOOK AT END
PT82	#6x9'-0" @ 4"	HOOK AT END
PT83	#6x9'-0" @ 6"	HOOK AT END

PT BOTTOM REINFORCEMENT SCHEDULE		
MARK	REINFORCING	REMARKS
PB1	#5x10'-0" @ 6"	
PB4	#4x6'-10" @ 12"	HOOK AT END
PB5	#5x6'-8" @ 6"	HOOK AT END
PB7	#5x20'-0" @ 12"	
PB8	#7x20'-0" @ 12"	
PB9	#7x20'-0" @ 6"	
PB10	#6x20'-0" @ 6"	
PB13	#5x15'-0" @ 12"	
PB14	#5x15'-0" @ 12"	
PB15	#7x10'-0" @ 8"	
PB16	#7x6'-4" @ 8"	HOOK AT END
PB17	#5x10'-0" @ 12"	
PB18	#7x10'-0" @ 12"	

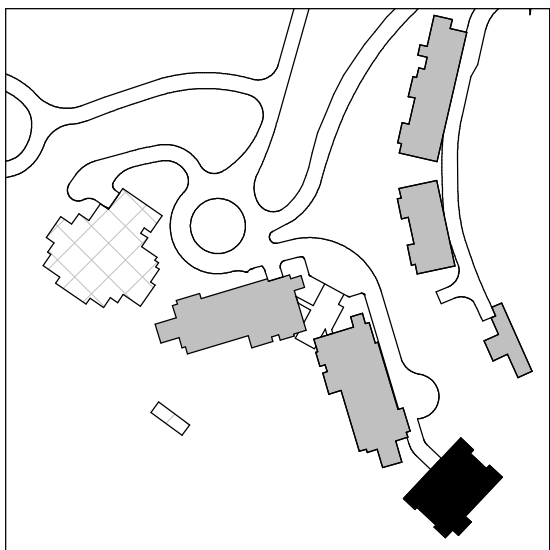

Reserved for permit stamp

150 South Jackson St., Suite 800  
Seattle, Washington 98104 USA  
+1 206 624 5970 olsonkundig.com

Olson Kundig

project  
SOMMET BLANC - ABC  
DEER VALLEY, UTAH

MAGNUSSON  
KLEMENCIC  
ASSOCIATES

Structural + Civil Engineers

Seattle Chicago  
www.mka.com  
206.292.1200

principal architect  
project manager  
drawn by

checked by  
job no. 20052  
date 05/17/2024

revisions:

5 01/07/2025 ASI/207  
04/08/2024 IFC SET 1 OF 3  
11/18/2022 95% CD  
no. date by


NOT FOR CONSTRUCTION

05/17/2024

TOWER C LEVEL 2  
REINFORCING  
PLAN

S2.C.12.R



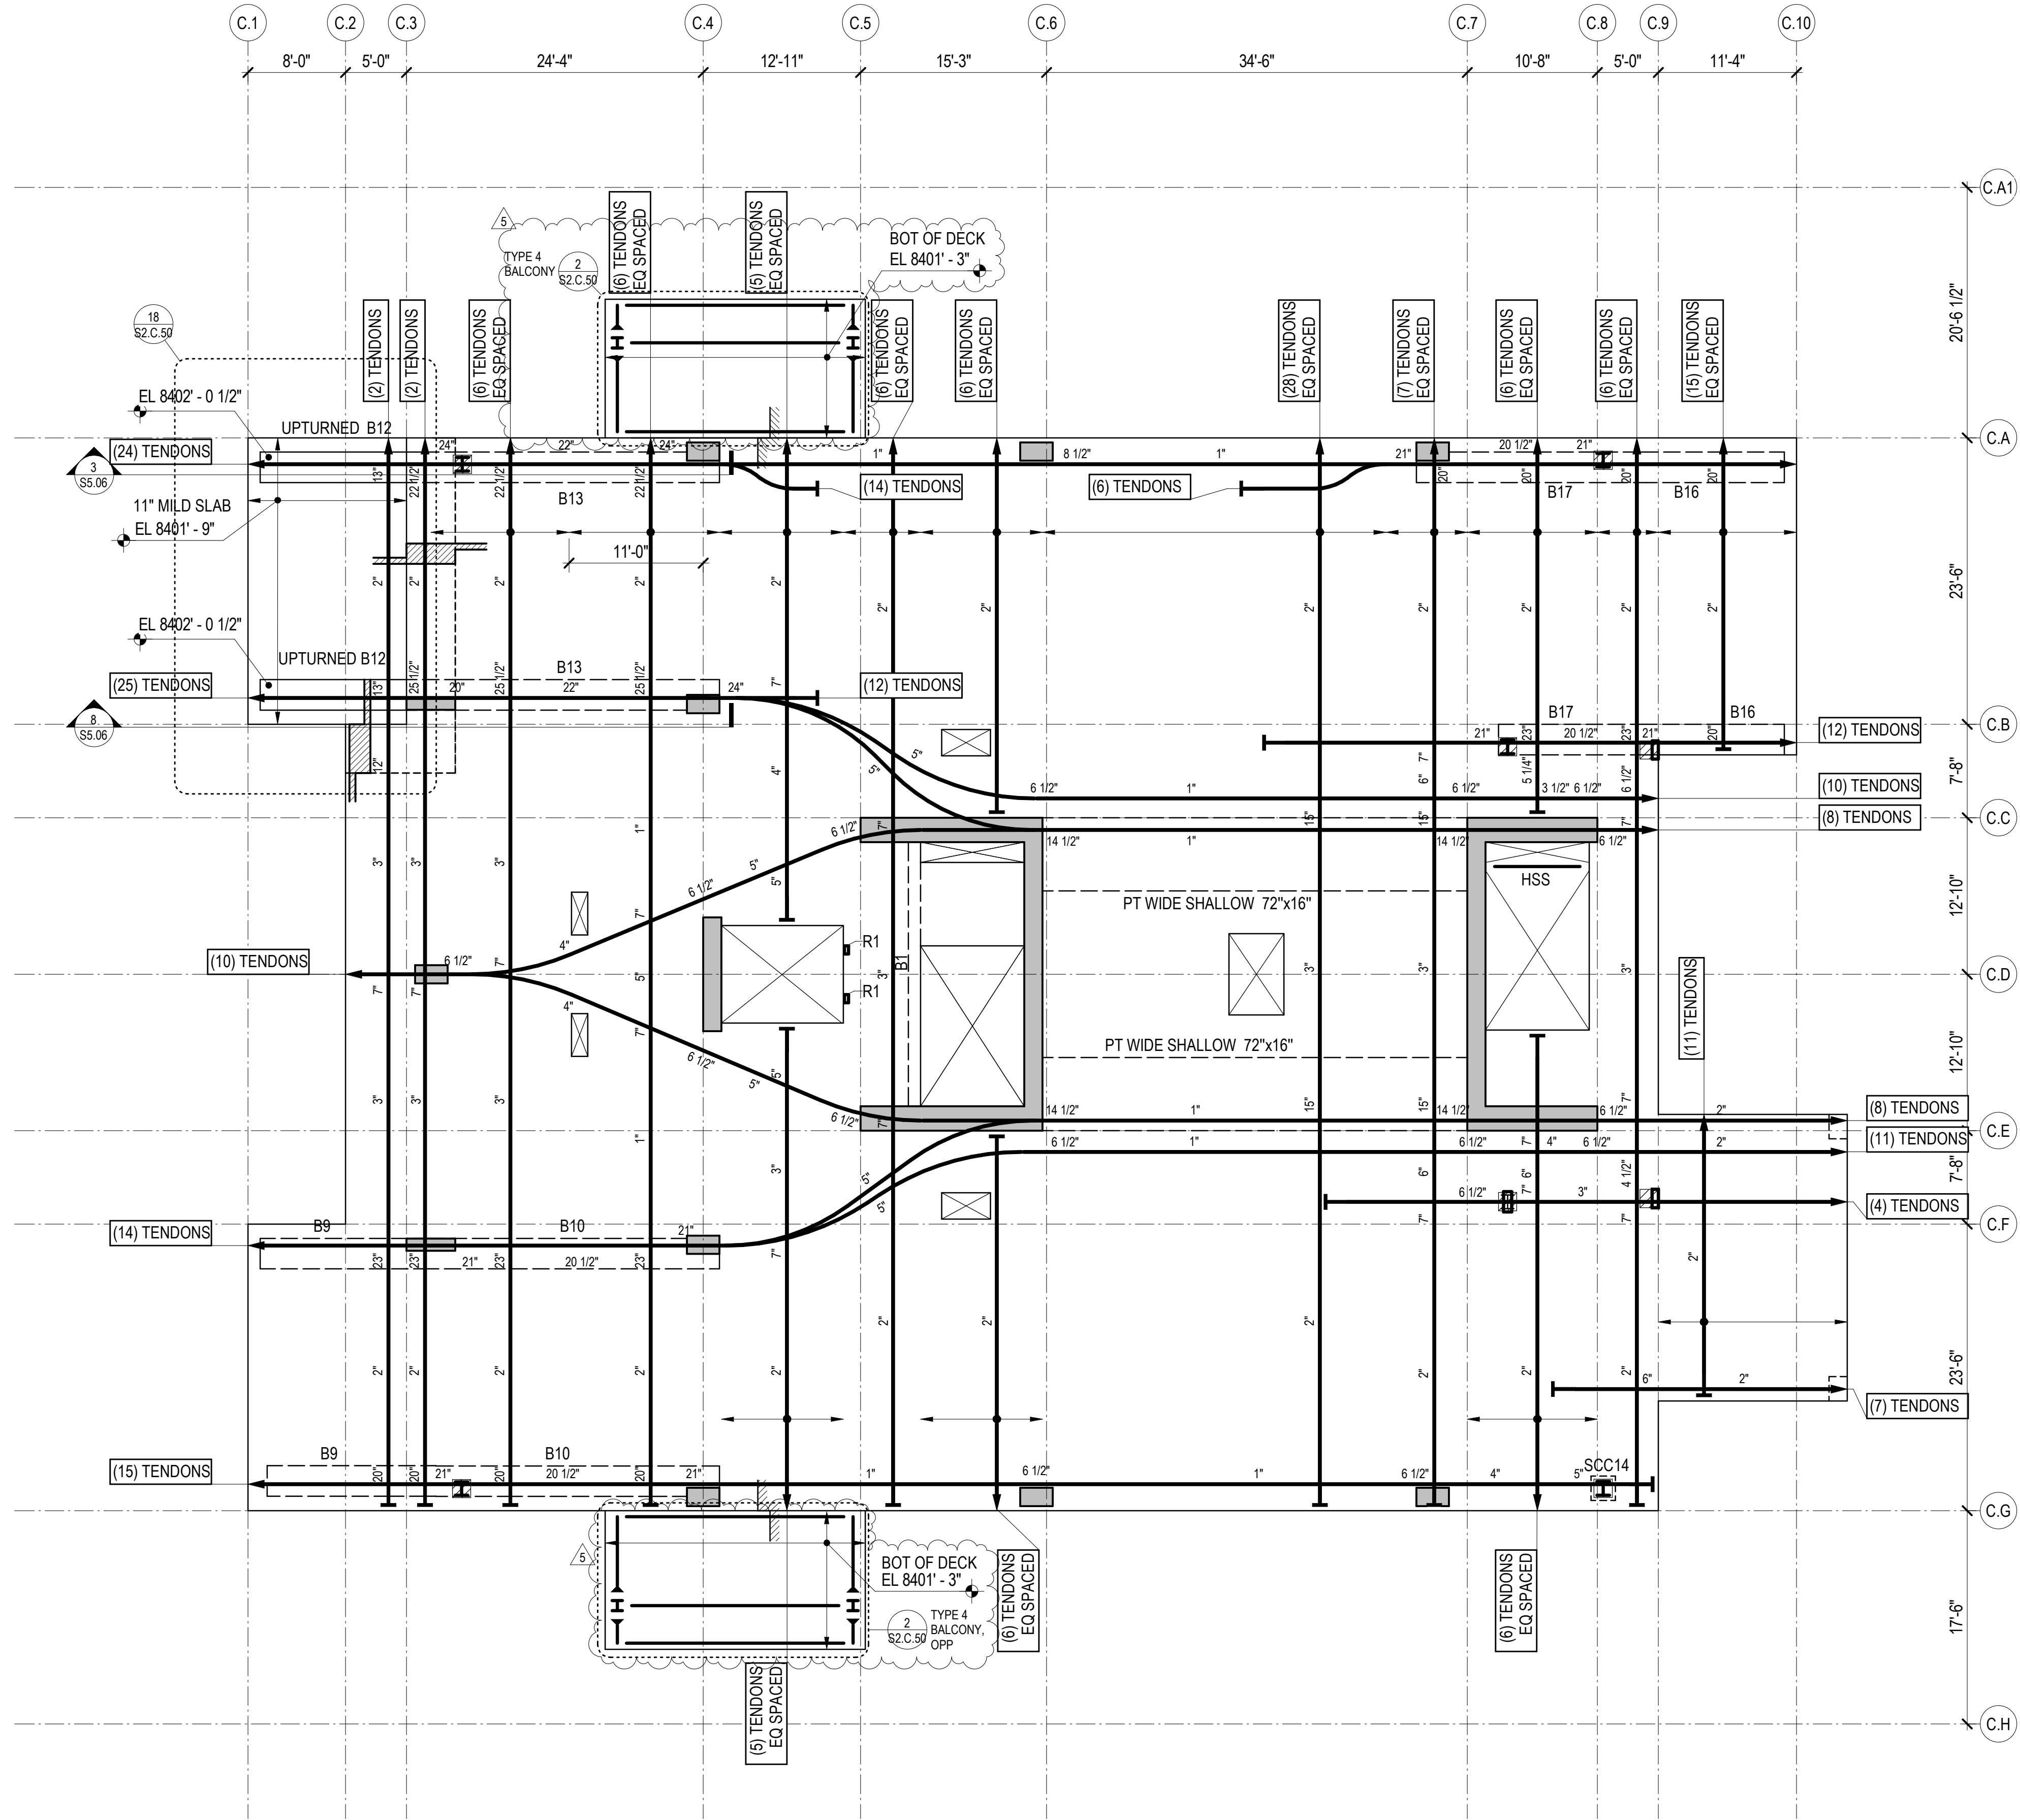




1 TOWER C - LEVEL 3 FRAMING PLAN  
1/8" = 1'-0"

REFERENCE DRAWINGS

- S0.XX DRAWING INDEX, ABBREVIATIONS, LEGENDS, GENERAL NOTES  
S1.XX LOAD DIAGRAMS  
S2.XX PLANS  
S3.XX ELEVATIONS  
S4.XX TYPICAL DETAILS AND SCHEDULES  
S5.XX CONCRETE SECTIONS AND DETAILS  
S6.XX STEEL SECTIONS AND DETAILS

NOTES:

- REFERENCE FLOOR ELEVATION IS 8402' - 6". TOP OF STRUCTURAL CONCRETE SLAB IS 8402' - 5", UNLESS NOTED OTHERWISE. SEE ARCHITECTURAL DRAWINGS FOR DRAINAGE SLOPES NOT SHOWN.
- STRUCTURAL SLAB IS AN 8-INCH THICK UNBONDED POST-TENSIONED TWO-WAY SLAB UNLESS NOTED OTHERWISE. SEE TYPICAL POST-TENSIONED SLAB DETAILS FOR ADDITIONAL INFORMATION.
- THE MINIMUM NUMBER OF REQUIRED POST-TENSIONING TENDONS IS SHOWN ON THE DRAWINGS. FINAL COUNT, LAYOUT, AND LIVE END LOCATION IS PER DEFERRED DESIGN-BUILD SUBMITTAL PROVIDED BY THE CONTRACTOR.
- CONCRETE PLACED IN THE SLAB/COLUMN INTERSECTION SHALL HAVE MINIMUM CONCRETE STRENGTH AS SHOWN IN THE GENERAL NOTES, BUT NO LESS THAN THAT SPECIFIED FOR THE COLUMN DIVIDED BY 1.4.
- COORDINATE LOCATION OF ALL EMBEDS WITH MECHANICAL, ELECTRICAL, PLUMBING, AND EXTERIOR WALL SYSTEMS PRIOR TO CASTING THE SLAB.
- SEE ARCHITECTURAL, MECHANICAL, PLUMBING, ELECTRICAL, AND OTHER DISCIPLINES DRAWINGS FOR OPENING SIZES AND LOCATIONS NOT SHOWN ON PLAN. SEE "TYPICAL OPENINGS AND EMBEDMENTS IN CONCRETE" DETAILS FOR OPENING PLACEMENT CRITERIA. NOTIFY THE STRUCTURAL ENGINEER OF ANY OPENINGS NOT SHOWN ON THE STRUCTURAL DRAWINGS FOR WHICH THE TYPICAL DETAILS DO NOT APPLY.
- REFERENCE ALL CONSTRUCTION DOCUMENTS FOR SIZE, EXTENT, AND LOCATION OF CONCRETE CURBS, HOUSEKEEPING PADS, CMU WALLS, PLANTER WALLS, BOLLARDS, AND EDGE ANGLES. REINFORCE PER THE TYPICAL DETAILS.
- REFERENCE ALL CONSTRUCTION DOCUMENTS FOR SIZE, EXTENT, AND LOCATION OF CONCRETE CURBS, HOUSEKEEPING PADS, CMU WALLS, PLANTER WALLS, BOLLARDS, AND EDGE ANGLES. REINFORCE PER THE TYPICAL DETAILS.

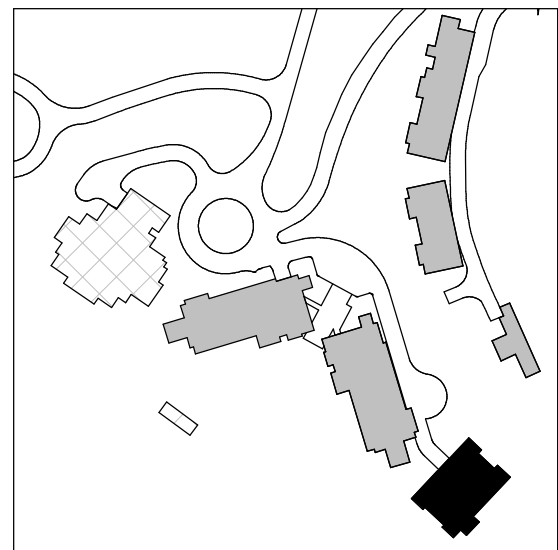

Reserved for permit stamp

150 South Jackson St., Suite 800  
Seattle, Washington 98104 USA  
+1 206 624 8970 olsonkundig.com

Olson Kundig

project:  
SOMMET BLANC - ABC  
DEER VALLEY, UTAH

MAGNUSSON  
KLEMENCIC  
ASSOCIATES

Structural + Civil Engineers  
Seattle Chicago  
www.mka.com  
206.292.1200

principal architect \_\_\_\_\_  
project manager \_\_\_\_\_  
drawn by \_\_\_\_\_  
checked by \_\_\_\_\_  
job no. 20052  
date 05/17/2024

revisions:

5	01/07/2025	ASL-007
3	8/19/2024	ASL-004
2	7/26/2024	ASL-002
	04/08/2024	IFC SET 1 OF 3
	11/18/2022	95% CD
no.	date	by


NOT FOR CONSTRUCTION

05/17/2024

TOWER C LEVEL 3  
FRAMING PLAN


S2.C.13




$$\overline{1/8'' = 1'-0''}$$


9. WHERE NOTE APPLIES, REINFORCEMENT IS TO BE PLACED WITHIN VERTICALS OF COLUMN NEAR GRID C.4/C.B. REINFORCEMENT SHALL BE CENTERED IN SLAB MID-DEPTH. REINFORCEMENT SHALL MEET CENTER-TO-CENTER SPACING OF  $3d_b$  BUT NOT LESS THAN 3-INCHES, UNLESS NOTED OTHERWISE. LAP SPLICE IS NOT PERMITTED; PROVIDE MECHANICAL COUPLER IF NECESSARY.

PT BOTTOM REINFORCEMENT SCHEDULE		
MARK	REINFORCING	REMARKS
PB1	#5x10'-0" @ 6"	
PB4	#4x6'-10" @ 12"	HOOK AT END
PB5	#5x6'-8" @ 6"	HOOK AT END
PB7	#5x20'-0" @ 12"	
PB8	#7x20'-0" @ 12"	
PB9	#7x20'-0" @ 6"	
PB10	#6x20'-0" @ 6"	
PB13	#5x15'-0" @ 24"	
PB14	#5x15'-0" @ 12"	
PB15	#7x10'-0" @ 8"	
PB16	#7x6'-4" @ 8"	HOOK AT END
PB17	#5x10'-0" @ 12"	
PB18	#7x10'-0" @ 12"	



S2.C.13.R



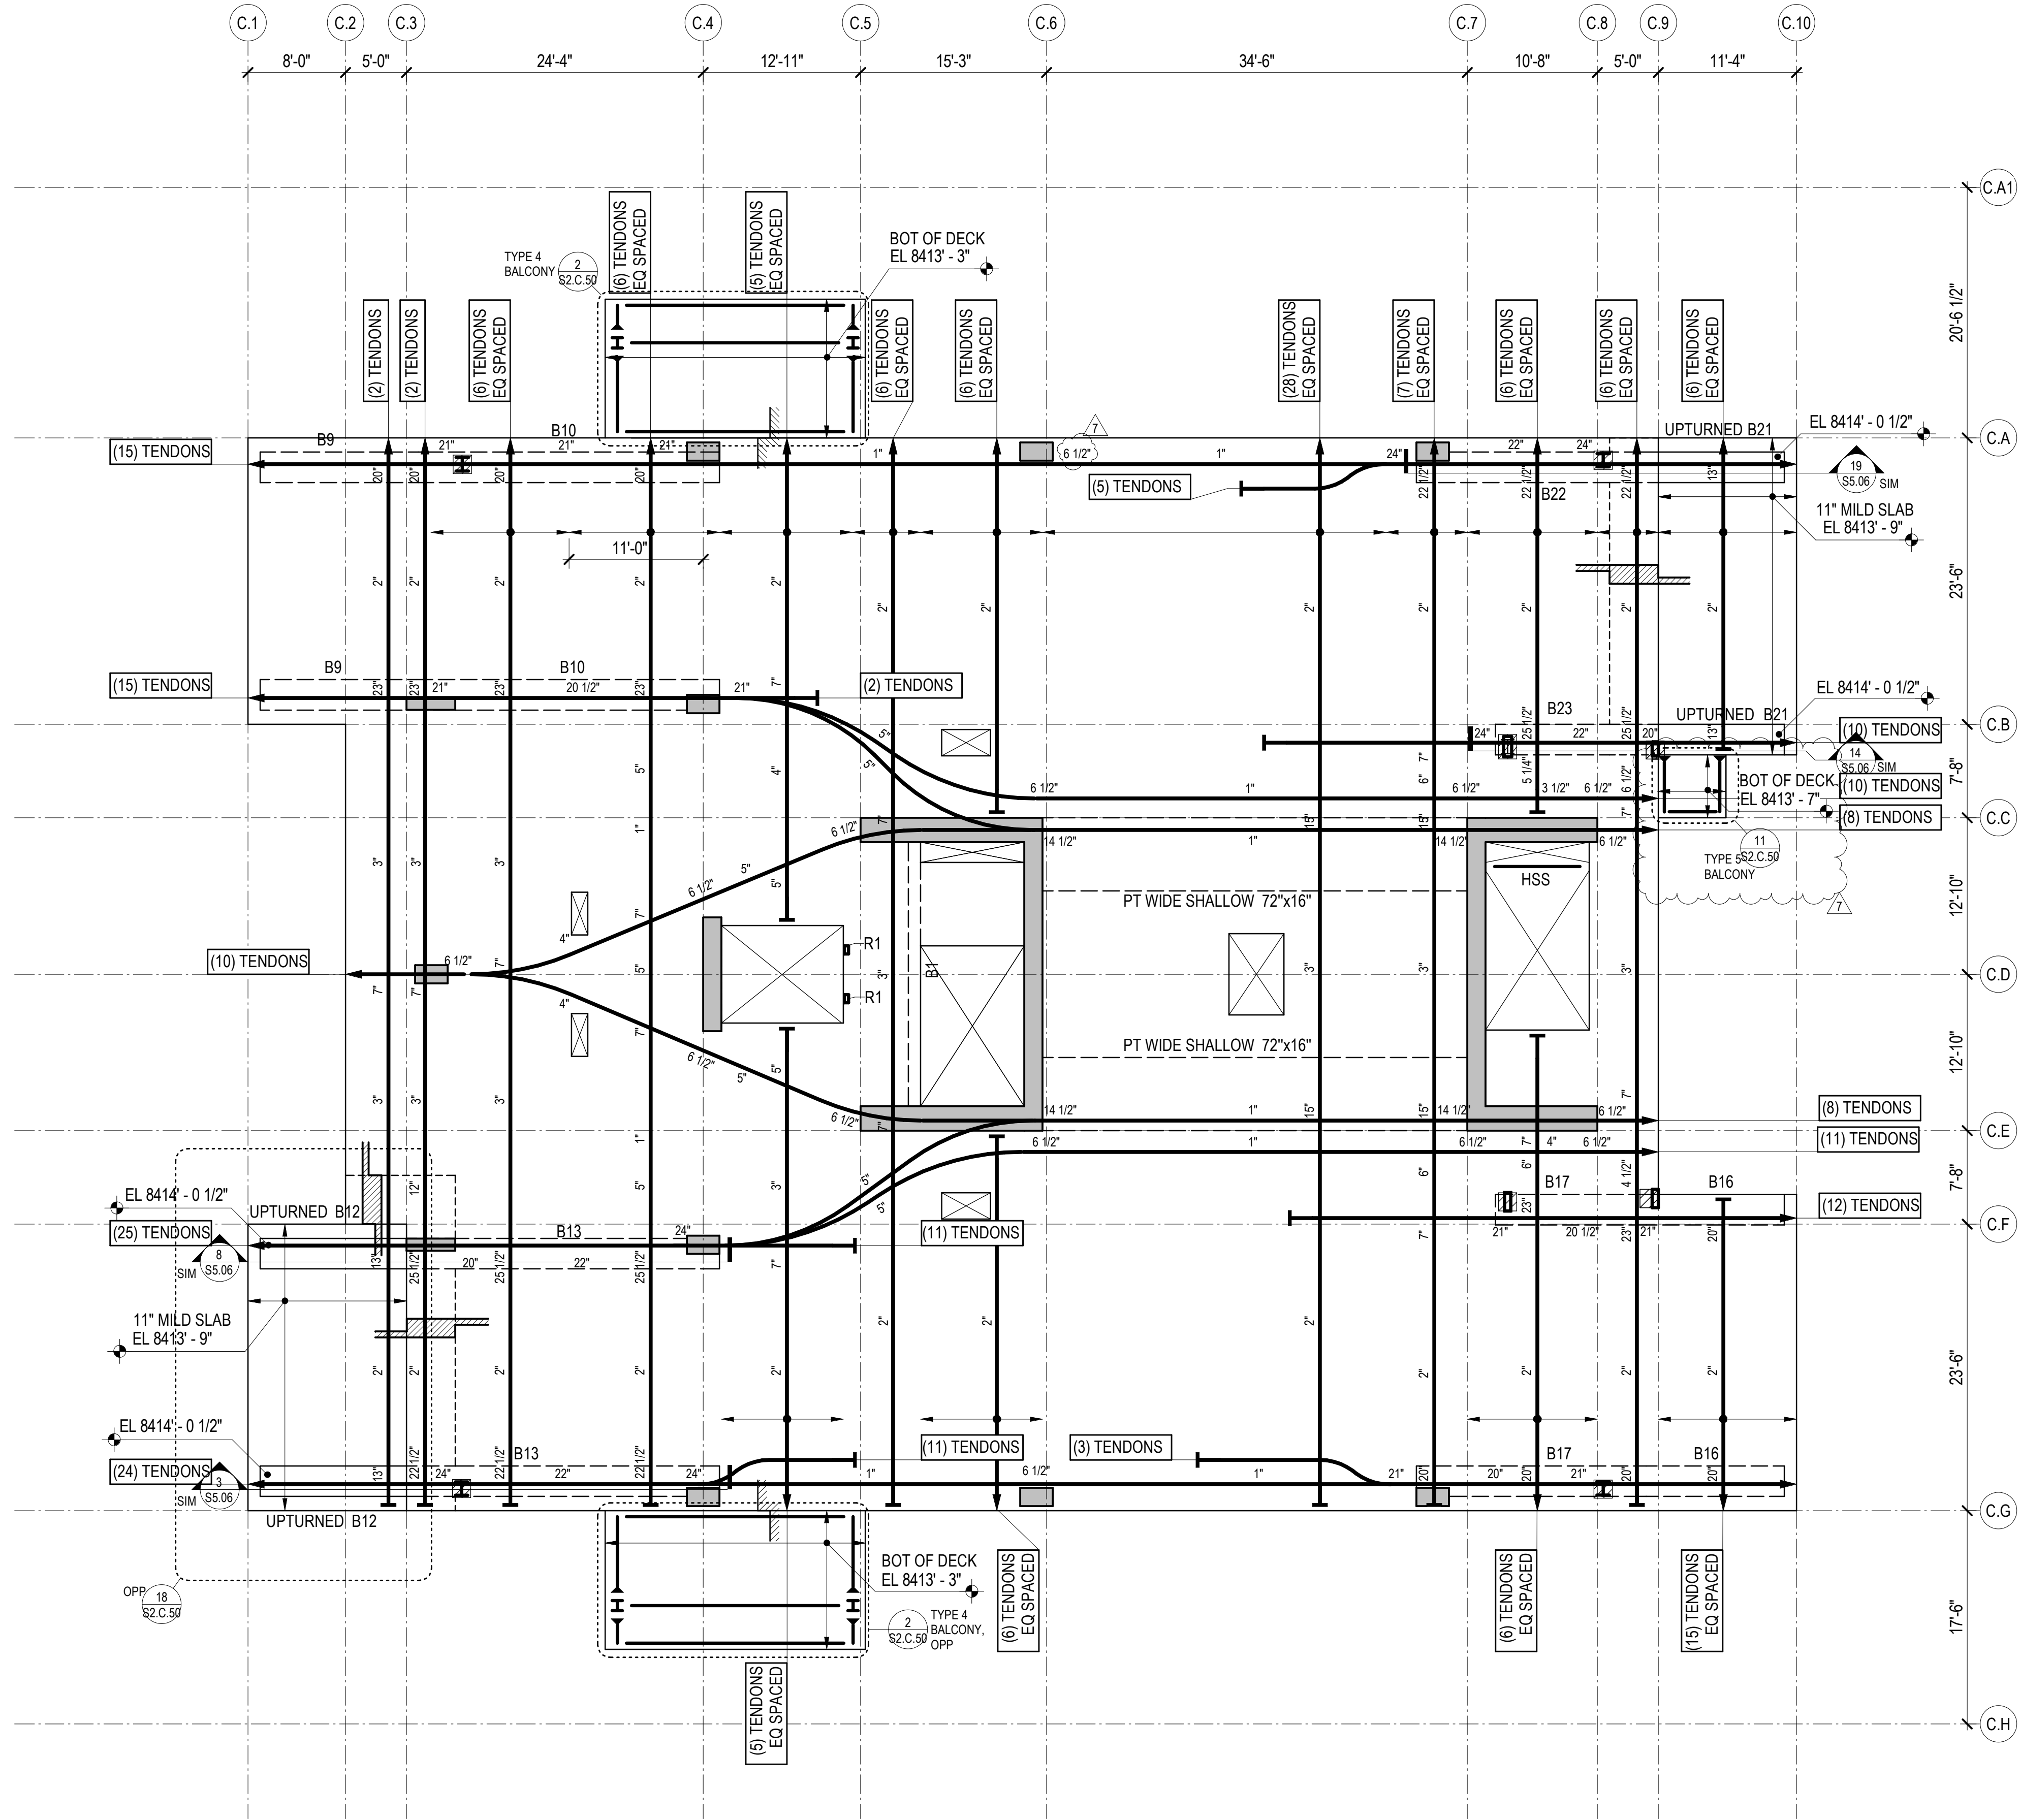




1 TOWER C - LEVEL 4 FRAMING PLAN  
1/8" = 1'-0"

REFERENCE DRAWINGS

- S0.XX DRAWING INDEX, ABBREVIATIONS, LEGENDS, GENERAL NOTES  
S1.XX LOAD DIAGRAMS  
S2.XX PLANS  
S3.XX ELEVATIONS  
S4.XX TYPICAL DETAILS AND SCHEDULES  
S5.XX CONCRETE SECTIONS AND DETAILS  
S6.XX STEEL SECTIONS AND DETAILS

NOTES:

- REFERENCE FLOOR ELEVATION IS 8414' - 6". TOP OF STRUCTURAL CONCRETE SLAB IS 8414' - 5", UNLESS NOTED OTHERWISE. SEE ARCHITECTURAL DRAWINGS FOR DRAINAGE SLOPES NOT SHOWN.
- STRUCTURAL SLAB IS AN 8-INCH THICK UNBONDED POST-TENSIONED TWO-WAY SLAB UNLESS NOTED OTHERWISE. SEE TYPICAL POST-TENSIONED SLAB DETAILS FOR ADDITIONAL INFORMATION.
- THE MINIMUM NUMBER OF REQUIRED POST-TENSIONING TENDONS IS SHOWN ON THE DRAWINGS. FINAL COUNT, LAYOUT, AND LIVE END LOCATION IS PER DEFERRED DESIGN-BUILD SUBMITTAL PROVIDED BY THE CONTRACTOR.
- CONCRETE PLACED IN THE SLAB/COLUMN INTERSECTION SHALL HAVE MINIMUM CONCRETE STRENGTH AS SHOWN IN THE GENERAL NOTES, BUT NO LESS THAN THAT SPECIFIED FOR THE COLUMN DIVIDED BY 1.4.
- COORDINATE LOCATION OF ALL EMBEDS WITH MECHANICAL, ELECTRICAL, PLUMBING, AND EXTERIOR WALL SYSTEMS PRIOR TO CASTING THE SLAB.
- SEE ARCHITECTURAL, MECHANICAL, PLUMBING, ELECTRICAL, AND OTHER DISCIPLINES DRAWINGS FOR OPENING SIZES AND LOCATIONS NOT SHOWN ON PLAN. SEE "TYPICAL OPENINGS AND EMBEDMENTS IN CONCRETE" DETAILS FOR OPENING PLACEMENT CRITERIA. NOTIFY THE STRUCTURAL ENGINEER OF ANY OPENINGS NOT SHOWN ON THE STRUCTURAL DRAWINGS FOR WHICH THE TYPICAL DETAILS DO NOT APPLY.
- REFERENCE ALL CONSTRUCTION DOCUMENTS FOR SIZE, EXTENT, AND LOCATION OF CONCRETE CURBS, HOUSEKEEPING PADS, CMU WALLS, PLANTER WALLS, BOLLARDS, AND EDGE ANGLES. REINFORCE PER THE TYPICAL DETAILS.
- REFERENCE ALL CONSTRUCTION DOCUMENTS FOR SIZE, EXTENT, AND LOCATION OF CONCRETE CURBS, HOUSEKEEPING PADS, CMU WALLS, PLANTER WALLS, BOLLARDS, AND EDGE ANGLES. REINFORCE PER THE TYPICAL DETAILS.

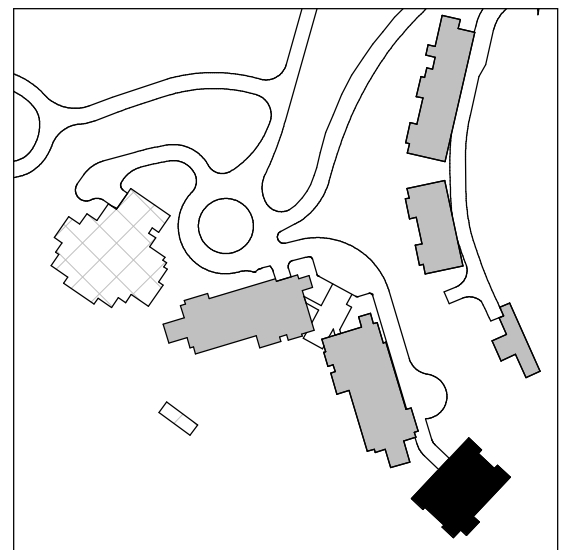

Reserved for permit stamp

150 South Jackson St., Suite 800  
Seattle, Washington 98104 USA  
+1 206 624 8700 olsonkundig.com

Olson Kundig

project:  
SOMMET BLANC - ABC  
DEER VALLEY, UTAH

MAGNUSSON  
KLEMENCIC  
ASSOCIATES

Structural + Civil Engineers  
Seattle Chicago  
www.mka.com  
206.292.1200

principal architect \_\_\_\_\_  
project manager \_\_\_\_\_  
drawn by \_\_\_\_\_  
checked by \_\_\_\_\_  
job no. 20052  
date 05/17/2024

revisions:

\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
7 1/28/2025 ASI-007.1  
5 01/07/2025 ASI-007  
3 8/19/2024 ASI-004  
2 7/26/2024 ASI-002  
04/08/2024 IFC SET 1 OF 3  
11/18/2022 95% CD  
no. date by


NOT FOR CONSTRUCTION

05/17/2024


TOWER C LEVEL 4  
FRAMING PLAN

S2.C.14





$$1/8^n = 1^s - 0^n$$

PT TOP REINFORCEMENT SCHEDULE		
MARK	REINFORCING	REMARKS
PT1	(6) #5x10'-0"	
PT2	(6) #5x15'-0"	
PT3	(8) #5x15'-0"	
PT4	(12) #5x10'-0"	
PT5	(10) #5x15'-0"	
PT6	(18) #5x12'-0" @ 5'	STAGGER 3'-0"
PT7	(14) #5x10'-0"	
PT9	(14) #5x15'-0"	
PT11	(13) #5x15'-0"	
PT12	(10) #5x12'-0"	
PT30	#5x10'-0" @ 15'	
PT32	#5x12'-0" @ 6"	
PT50	(4) #5x6'-8"	HOOK AT END
T51	(6) #5x6'-8"	HOOK AT END
T52	(10) #5x9'-2"	HOOK AT END
T54	(6) #5x14'-2"	HOOK AT END
T56	(16) #5x11'-2"	HOOK AT END
T57	(10) #5x14'-2"	HOOK AT END
T60	(12) #5x9'-2"	HOOK AT END
T80	#5x11'-2" @ 10"	HOOK AT END
T81	#5x6'-8" @ 10"	HOOK AT END
T82	#5x9'-0" @ 4"	HOOK AT END
T83	#5x9'-0" @ 6"	HOOK AT END





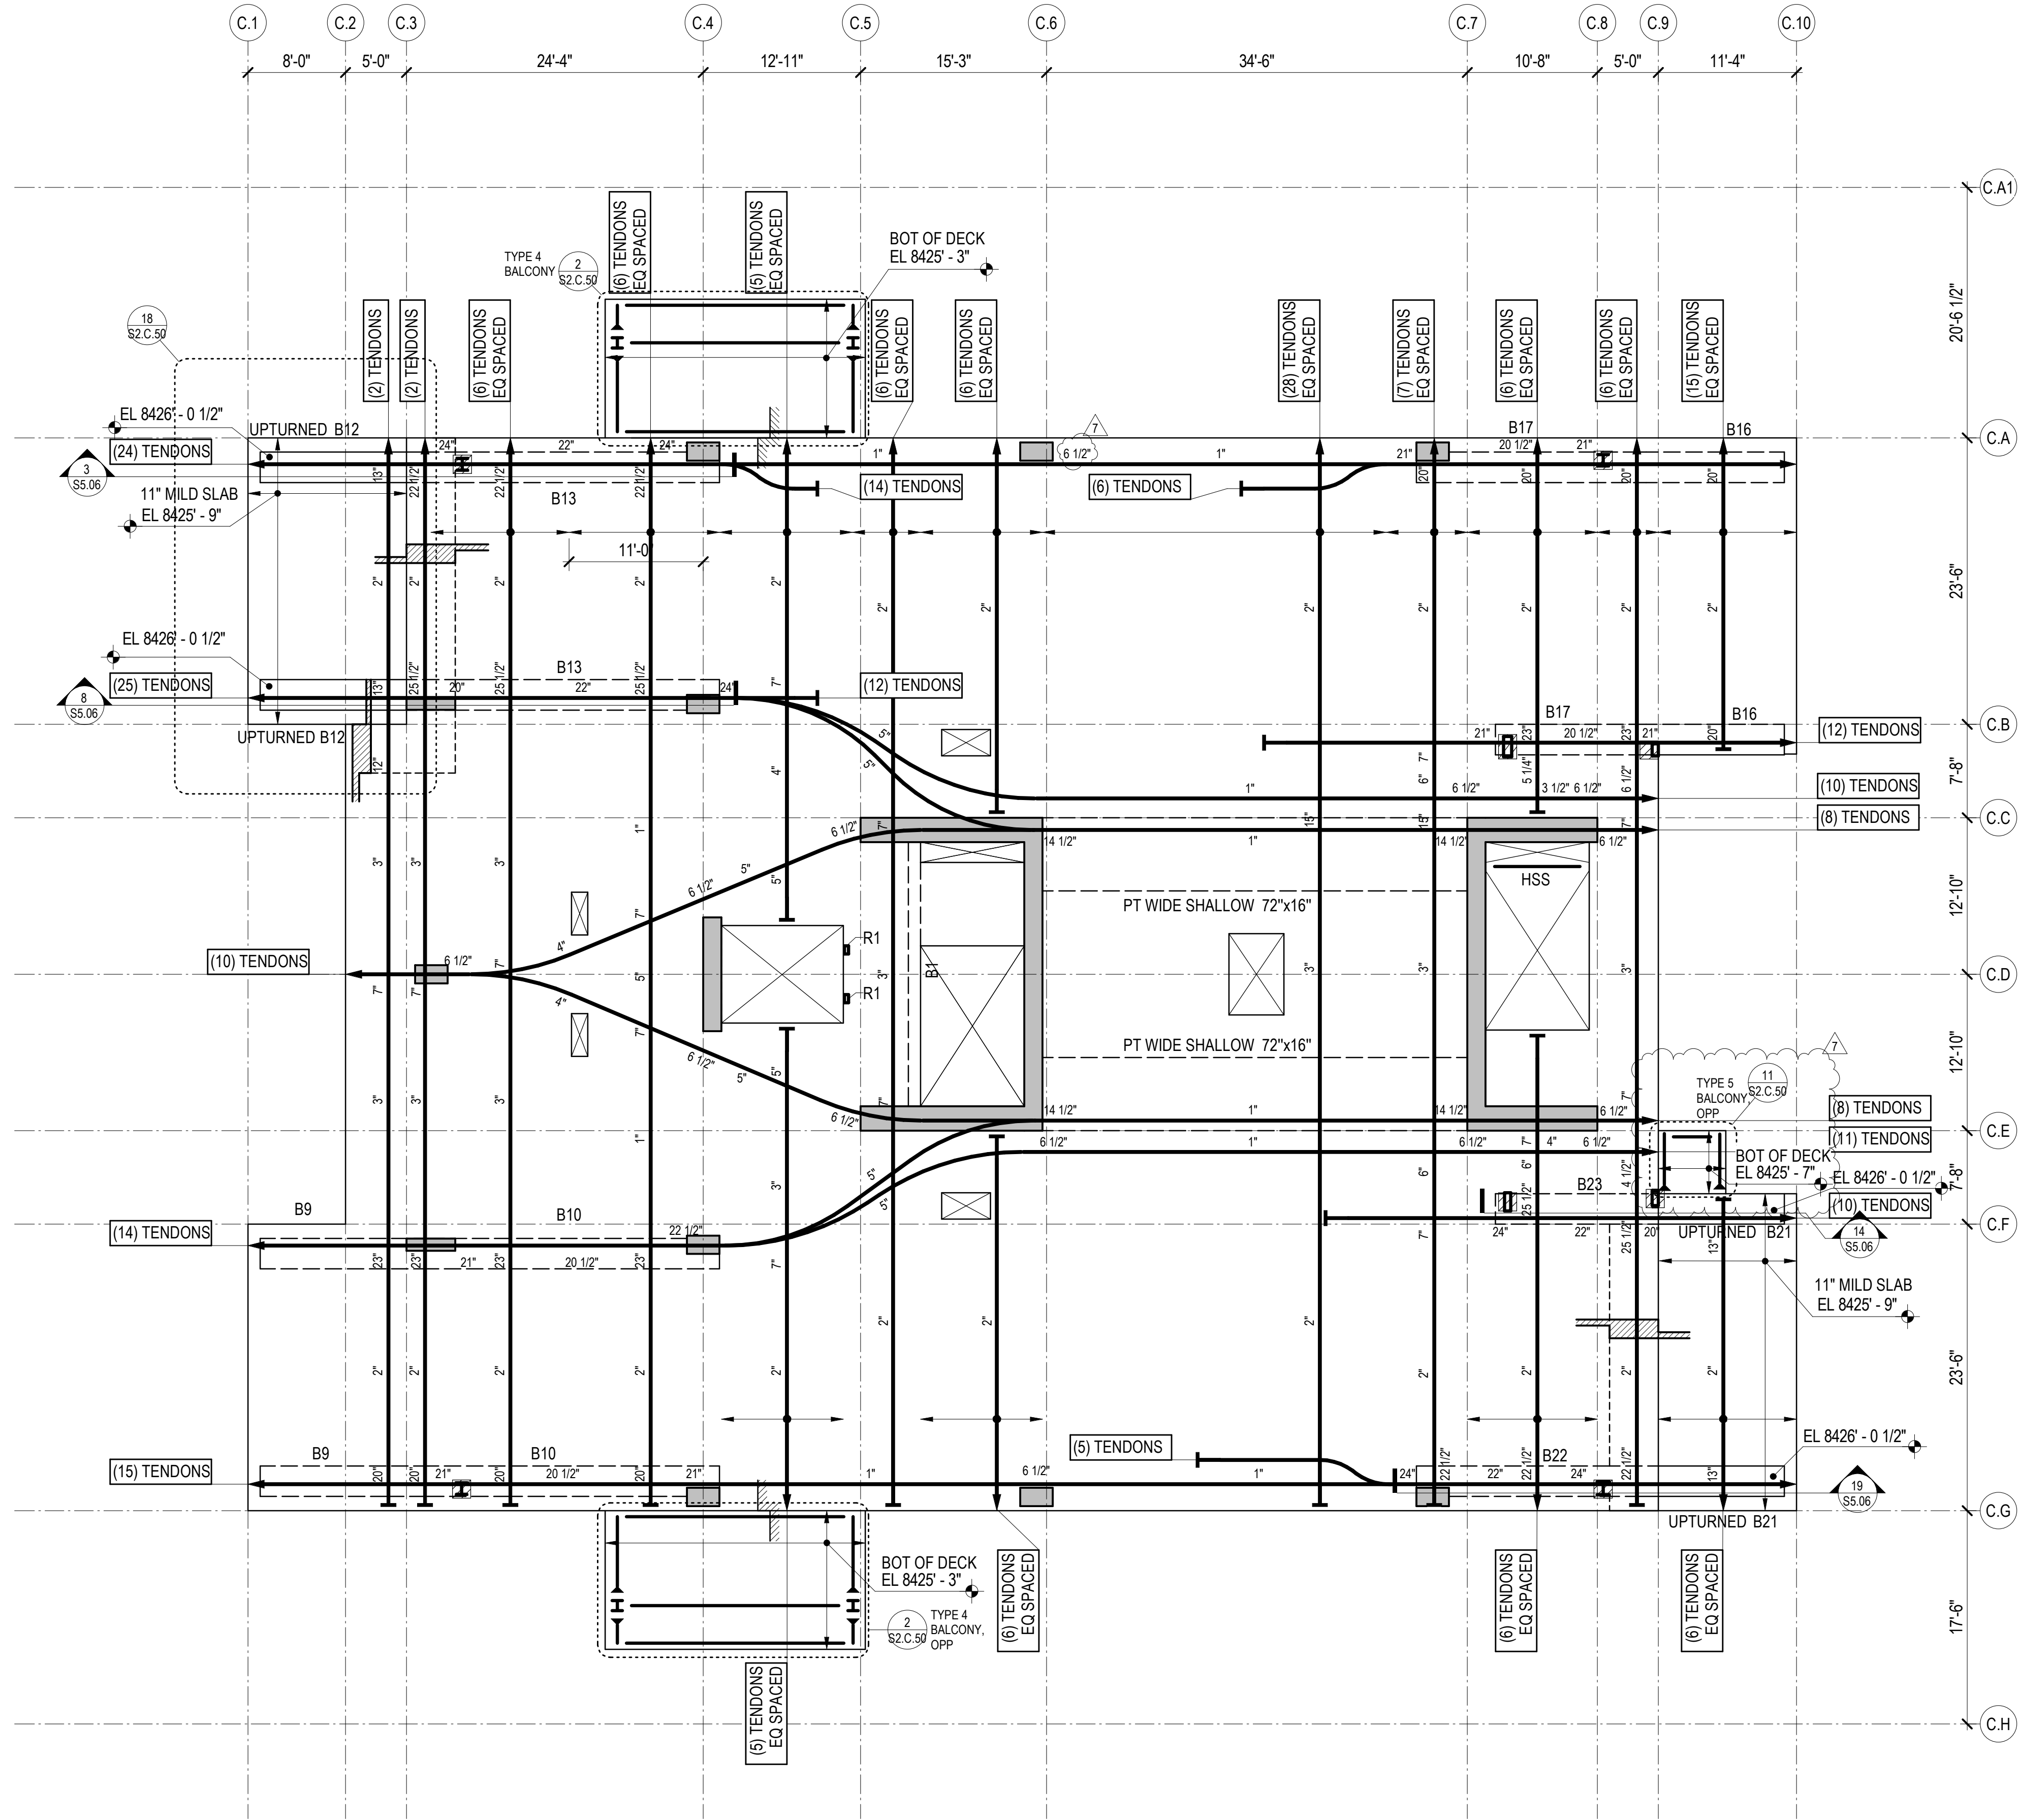

1 TOWER C - LEVEL 5 FRAMING PLAN  
1/8" = 1'-0"




REFERENCE DRAWINGS

- S0.XX DRAWING INDEX, ABBREVIATIONS, LEGENDS, GENERAL NOTES  
S1.XX LOAD DIAGRAMS  
S2.XX PLANS  
S3.XX ELEVATIONS  
S4.XX TYPICAL DETAILS AND SCHEDULES  
S5.XX CONCRETE SECTIONS AND DETAILS  
S6.XX STEEL SECTIONS AND DETAILS

NOTES:

- REFERENCE FLOOR ELEVATION IS 8426' - 6". TOP OF STRUCTURAL CONCRETE SLAB IS 8426' - 5", UNLESS NOTED OTHERWISE. SEE ARCHITECTURAL DRAWINGS FOR DRAINAGE SLOPES NOT SHOWN.
- STRUCTURAL SLAB IS AN 8-INCH THICK UNBONDED POST-TENSIONED TWO-WAY SLAB UNLESS NOTED OTHERWISE. SEE TYPICAL POST-TENSIONED SLAB DETAILS FOR ADDITIONAL INFORMATION.
- THE MINIMUM NUMBER OF REQUIRED POST-TENSIONING TENDONS IS SHOWN ON THE DRAWINGS. FINAL COUNT, LAYOUT, AND LIVE END LOCATION IS PER DEFERRED DESIGN-BUILD SUBMITTAL PROVIDED BY THE CONTRACTOR.
- CONCRETE PLACED IN THE SLAB/COLUMN INTERSECTION SHALL HAVE MINIMUM CONCRETE STRENGTH AS SHOWN IN THE GENERAL NOTES, BUT NO LESS THAN THAT SPECIFIED FOR THE COLUMN DIVIDED BY 1.4.
- COORDINATE LOCATION OF ALL EMBEDS WITH MECHANICAL, ELECTRICAL, PLUMBING, AND EXTERIOR WALL SYSTEMS PRIOR TO CASTING THE SLAB.
- SEE ARCHITECTURAL, MECHANICAL, PLUMBING, ELECTRICAL, AND OTHER DISCIPLINES DRAWINGS FOR OPENING SIZES AND LOCATIONS NOT SHOWN ON PLAN. SEE "TYPICAL OPENINGS AND EMBEDMENTS IN CONCRETE" DETAILS FOR OPENING PLACEMENT CRITERIA. NOTIFY THE STRUCTURAL ENGINEER OF ANY OPENINGS NOT SHOWN ON THE STRUCTURAL DRAWINGS FOR WHICH THE TYPICAL DETAILS DO NOT APPLY.

- REFERENCE ALL CONSTRUCTION DOCUMENTS FOR SIZE, EXTENT, AND LOCATION OF CONCRETE CURBS, HOUSEKEEPING PADS, CMU WALLS, PLANTER WALLS, BOLLARDS, AND EDGE ANGLES. REINFORCE PER THE TYPICAL DETAILS.
- REFERENCE ALL CONSTRUCTION DOCUMENTS FOR SIZE, EXTENT, AND LOCATION OF CONCRETE CURBS, HOUSEKEEPING PADS, CMU WALLS, PLANTER WALLS, BOLLARDS, AND EDGE ANGLES. REINFORCE PER THE TYPICAL DETAILS.

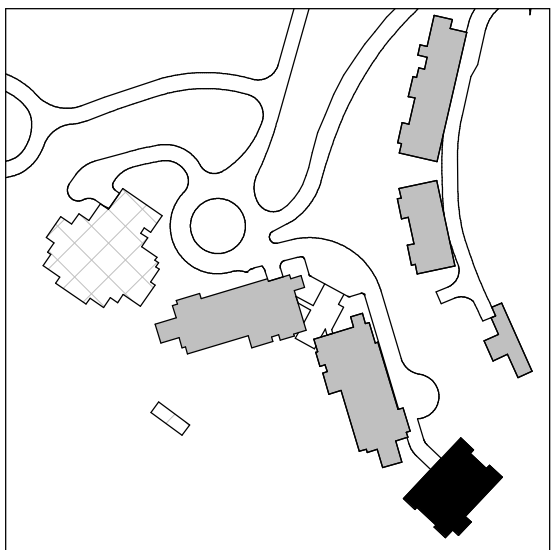

Reserved for permit stamp

150 South Jackson St., Suite 800  
Seattle, Washington 98104 USA  
+1 206 624 8970 olsonkundig.com

Olson Kundig

project:  
SOMMET BLANC - ABC  
DEER VALLEY, UTAH

MAGNUSSON  
KLEMENCIC  
ASSOCIATES

Structural + Civil Engineers  
Seattle Chicago  
www.mka.com  
206.292.1200

principal architect \_\_\_\_\_  
project manager \_\_\_\_\_  
drawn by \_\_\_\_\_  
checked by \_\_\_\_\_  
job no. 20052  
date 05/17/2024  
revisions:

7 1/28/2025 ASI-007.1  
5 01/07/2025 ASI-007  
3 8/19/2024 ASI-004  
2 7/26/2024 ASI-002  
04/06/2024 IFC SET 1 OF 3  
11/18/2022 95% CD  
no. date by


NOT FOR CONSTRUCTION

05/17/2024

TOWER C LEVEL 5  
FRAMING PLAN

S2.C.15





$$\frac{1}{8}'' = 1'-0''$$








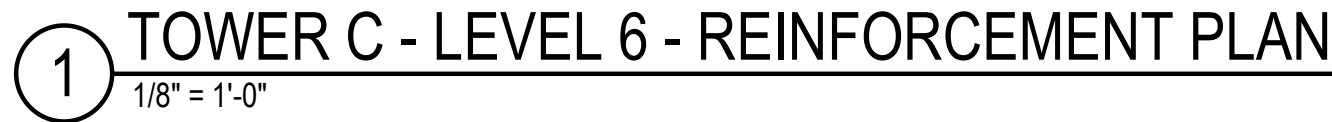

$$\frac{1}{8}'' = 1'-0''$$



PT TOP REINFORCEMENT SCHEDULE		
MARK	REINFORCING	REMARKS
PT1	(6) #5x10'-0"	
PT2	(6) #5x15'-0"	
PT3	(8) #5x15'-0"	
PT4	(12) #5x10'-0"	
PT5	(10) #5x15'-0"	
PT6	(18) #5x12'-0" @ 5'	STAGGER 3'-0"
PT7	(14) #5x10'-0"	
PT9	(14) #6x15'-0"	
PT11	(13) #6x15'-0"	
PT12	(10) #5x12'-0"	
PT30	#5x10'-0" @ 15"	
PT32	#5x12'-0" @ 6"	
PT50	(4) #5x6'-8"	HOOK AT END
PT51	(6) #5x6'-8"	HOOK AT END
PT52	(10) #5x9'-2"	HOOK AT END
PT54	(6) #5x14'-2"	HOOK AT END
PT56	(16) #5x11'-2"	HOOK AT END
PT57	(10) #5x14'-2"	HOOK AT END
PT60	(12) #5x9'-2"	HOOK AT END
PT80	#5x11'-2" @ 10"	HOOK AT END
PT81	#5x6'-8" @ 10"	HOOK AT END
PT82	#6x9'-0" @ 4"	HOOK AT END
PT83	#6x9'-0" @ 6"	HOOK AT END







7. SEE ARCHITECTURAL, MECHANICAL, PLUMBING, ELECTRICAL, AND OTHER DISCIPLINES DRAWINGS FOR OPENING SIZES AND LOCATIONS NOT SHOWN ON PLAN. SEE "TYPICAL OPENINGS AND EMBEDMENTS IN CONCRETE" DETAILS FOR OPENING PLACEMENT CRITERIA. NOTIFY THE STRUCTURAL ENGINEER OF ANY OPENINGS NOT SHOWN ON THE STRUCTURAL DRAWINGS FOR WHICH THE TYPICAL DETAILS DO NOT APPLY.
8. REFERENCE ALL CONSTRUCTION DOCUMENTS FOR SIZE, EXTENT, AND LOCATION OF CONCRETE CURBS, HOUSEKEEPING PADS, CHIMNEYS, WALLS, PLANTER WALLS, BOLLARDS, AND EASE AREAS. REINFORCE PER THE TYPICAL DETAILS.
9. ☐ INDICATES TYPICAL BUILT-UP SLAB ON RIGID FOAM. SEE ARCHITECTURAL DRAWINGS FOR LOCATIONS AND ELEVATIONS OF ARCHITECTURAL BUILT-UP SLABS. SEE TYPICAL BUILT-UP SLAB DETAIL FOR ADDITIONAL INFORMATION.



# Olson Kundig

project: **SOMMET BLANC - ABC**  
**DEER VALLEY, UTAH**

MAGNUSSON  
KLEMENCIC  
ASSOCIATES

**Structural + Civil Engineers**  
Seattle Chicago  
www.mika.com  
206 292 1200

principal architect \_\_\_\_\_  
project manager \_\_\_\_\_  
drawn by \_\_\_\_\_  
checked by \_\_\_\_\_  
job no. 20052  
date 05/17/2024

revisions:

---

---

---

---

---

---

7	1/28/2025	ASI-007.1
5	01/07/2025	ASI-007
3	8/19/2024	ASI-004
2	7/26/2024	ASI-002
	04/08/2024	IFC SET 1 OF 3
	11/18/2022	95% CD

no.	date	by
-----	------	----

NOT FOR CONSTRUCTION

05/17/2024

TOWER C LEVEL 7  
FRAMING PLAN

## S2.C.17










$1/8" = 1'-0"$


S0.XX	DRAWING INDEX, ABBREVIATIONS, LEGENDS, GENERAL NOTES
S1.XX	LOAD DIAGRAMS
S2.XX	PLANS
S3.XX	ELEVATIONS
S4.XX	TYPICAL DETAILS AND SCHEDULES
S5.XX	CONCRETE SECTIONS AND DETAILS
S6.XX	STEEL SECTIONS AND DETAILS

1. REFERENCE FLOOR ELEVATION IS 8463' - 0". TOP OF STRUCTURAL CONCRETE SLAB IS 8462' - 11" UNLESS NOTED OTHERWISE. SEE ARCHITECTURAL DRAWINGS FOR DRAINAGE SLOPES NOT SHOWN.
2. STRUCTURAL SLAB IS A 12-INCH THICK UNBONDED POST-TENSIONED TWO-WAY SLAB UNLESS NOTED OTHERWISE. SEE TYPICAL POST-TENSIONED SLAB DETAILS FOR ADDITIONAL INFORMATION.
3. THE MINIMUM NUMBER OF REQUIRED POST-TENSIONING TENDONS IS SHOWN ON THE DRAWINGS. FINAL COUNT, LAYOUT, AND LIVE END LOCATION IS PER DEFERRED DESIGN-BUILD SUBMITTAL PROVIDED BY THE CONTRACTOR.
4. CONCRETE PLACED IN THE SLAB/SHEAR WALL INTERSECTION, INCLUDING COUPLING BEAMS, SHALL HAVE MINIMUM CONCRETE STRENGTH EQUAL TO THAT SPECIFIED FOR THE SHEAR WALLS.
5. CONCRETE PLACED IN THE SLAB/COLUMN INTERSECTION SHALL HAVE MINIMUM CONCRETE STRENGTH AS SHOWN IN THE GENERAL NOTES, BUT NO LESS THAN THAT SPECIFIED FOR THE COLUMNS DIVIDED BY 1.4.
6. COORDINATE LOCATION OF ALL EMBEDS WITH MECHANICAL, ELECTRICAL, PLUMBING AND EXTERIOR WALL SYSTEMS PRIOR TO CASTING THE SLAB.


- 



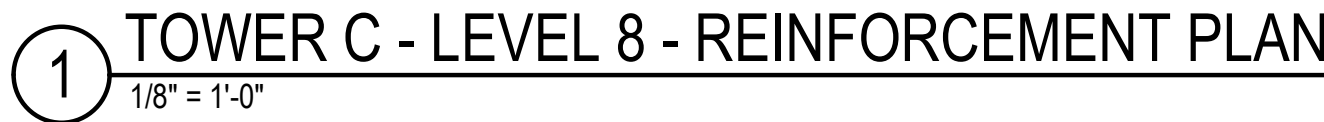



$$1/8" = 1'-0"$$


PT TOP REINFORCEMENT SCHEDULE		
MARK	REINFORCING	REMARKS
PT1	(6) #5x10'-0"	
PT2	(6) #5x15'-0"	
PT3	(8) #5x15'-0"	
PT4	(12) #5x10'-0"	
PT5	(10) #5x15'-0"	
PT6	(18) #6x12'-0" @ 5"	STAGGER 3'-0"
PT7	(14) #5x10'-0"	
PT9	(14) #6x15'-0"	
PT11	(13) #6x15'-0"	
PT12	(10) #5x12'-0"	
PT30	#5x10'-0" @ 15'	
PT32	#6x12'-0" @ 6"	
PT4	(4) #5x6'-8"	HOOK AT END
PT51	(6) #5x6'-8"	HOOK AT END
PT52	(10) #5x9'-2"	HOOK AT END
PT54	(6) #5x14'-2"	HOOK AT END
PT56	(16) #5x11'-2"	HOOK AT END
PT57	(10) #5x14'-2"	HOOK AT END
PT60	(12) #5x9'-2"	HOOK AT END
PT80	#5x11'-2" @ 10"	HOOK AT END
PT81	#5x6'-8" @ 10"	HOOK AT END
PT82	#6x9'-0" @ 4"	HOOK AT END
PT83	#6x9'-0" @ 6"	HOOK AT END





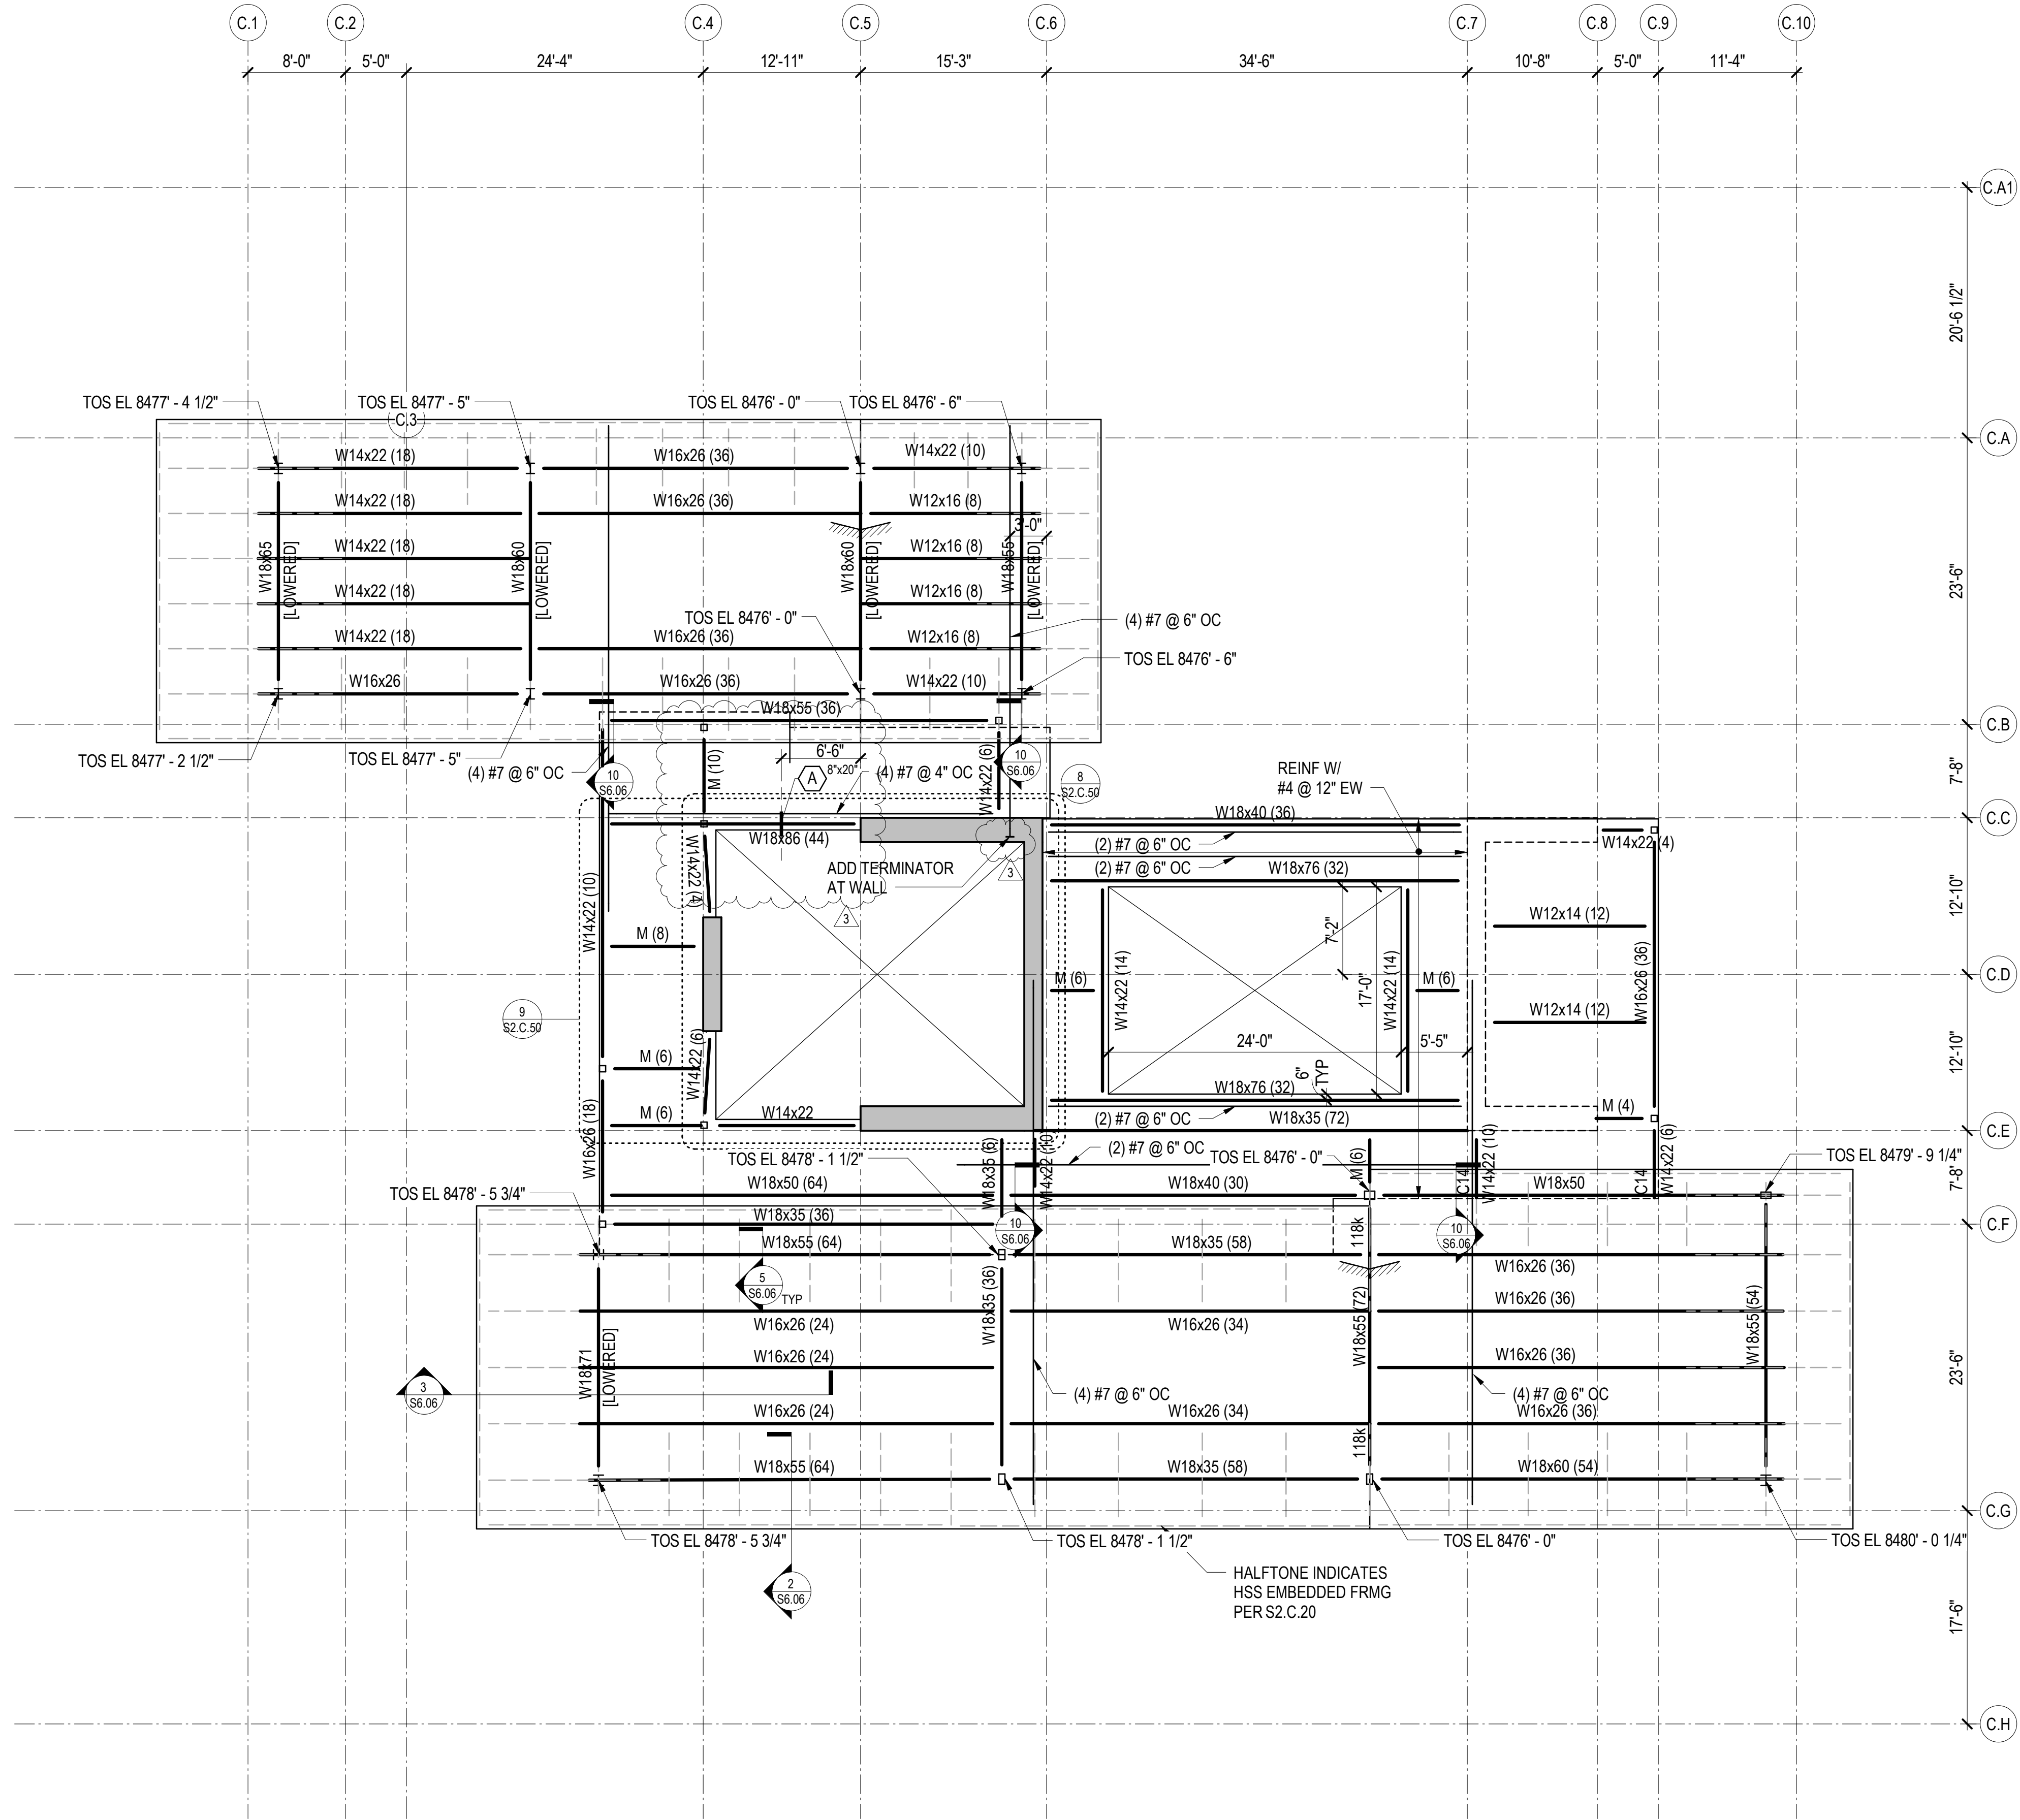



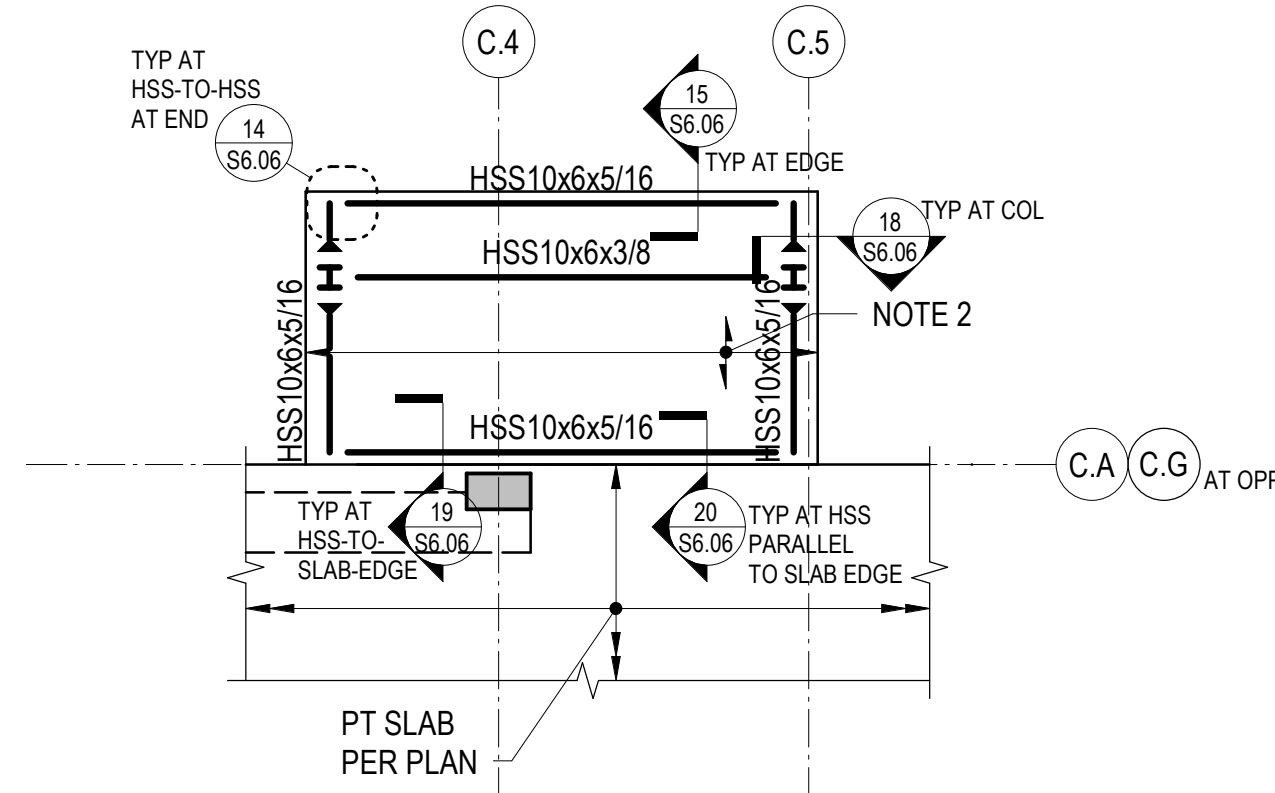


**NOTES:**

- SEE RELEVANT PLANS FOR REFERENCE ELEVATION. TOP OF STEEL IS AT BOTTOM OF DECK UNLESS NOTED OTHERWISE.
- STRUCTURAL SLAB IS 3-INCHES OF CONCRETE ON 3-INCH COMPOSITE STEEL DECK UNLESS NOTED OTHERWISE. REINFORCE WITH WWR 6x6-W2.9xW2.9. SEE TYPICAL SLAB ON STEEL DECK DETAILS FOR REINFORCING AND OTHER INFORMATION. REINFORCING SHOWN ON THE PLAN AND IN THE TYPICAL DETAILS IS IN ADDITION TO THIS REINFORCING.

**2 PARTIAL PLAN - TYPE 4 BALCONY**

1/8" = 1'-0"

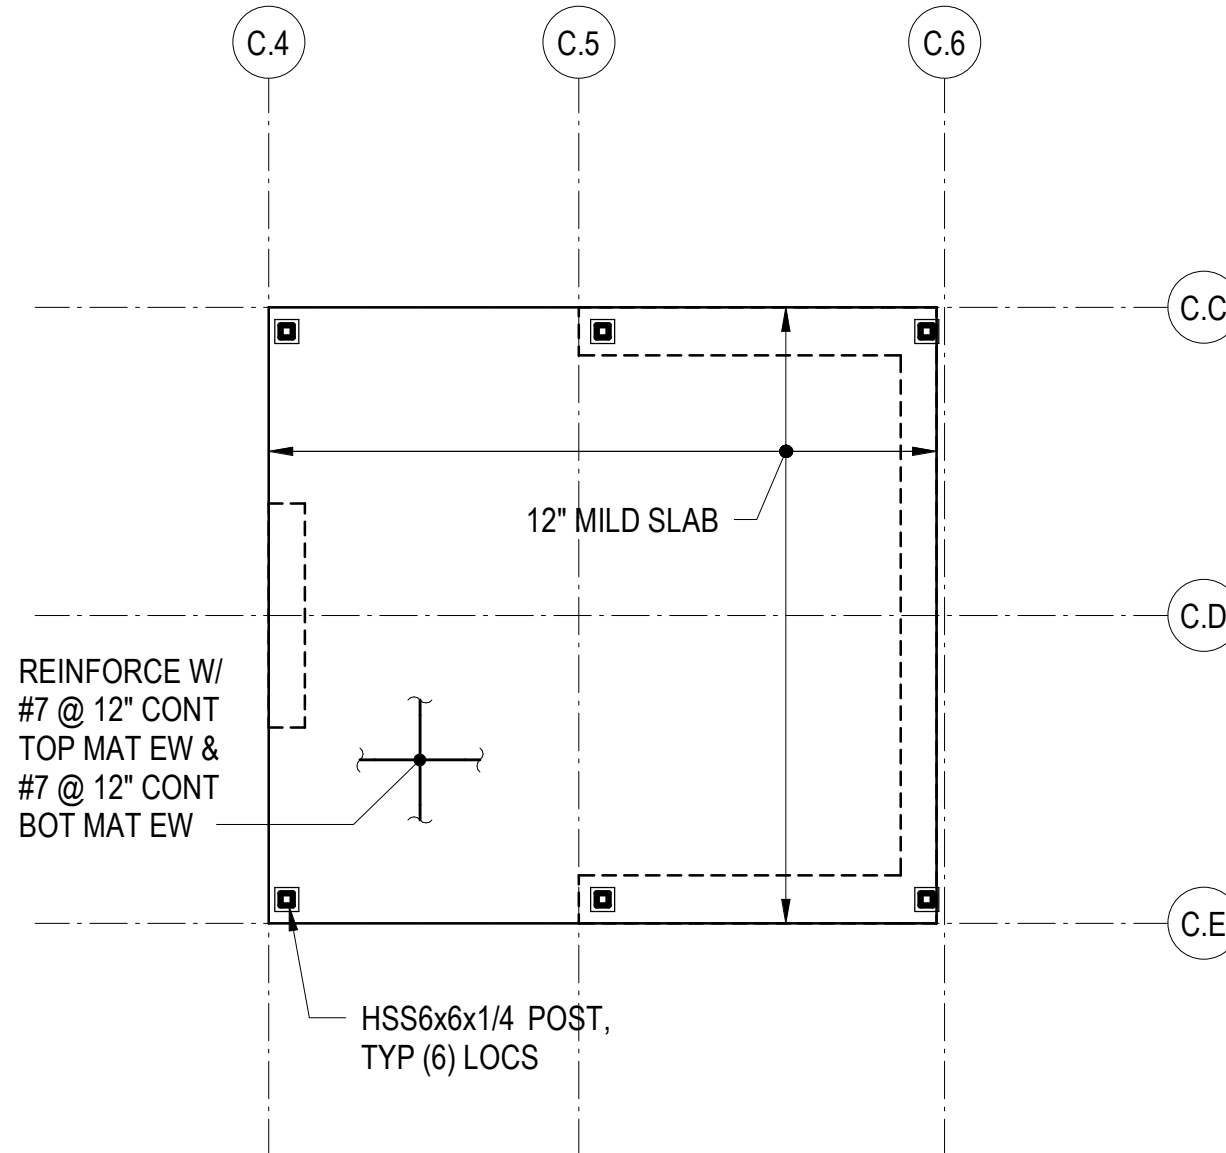


**NOTES:**

- REFERENCE FLOOR ELEVATION IS 8482'-2". TOP OF CONCRETE SLAB IS AT THE REFERENCE ELEVATION UNLESS NOTED OTHERWISE. SEE ARCHITECTURAL DRAWINGS FOR DRAINAGE SLOPES NOT SHOWN.
- THE STRUCTURAL SLAB IS A 12-INCH THICK MILD TWO-WAY SLAB UNLESS NOTED OTHERWISE. SEE THE TYPICAL MILD SLAB DETAILS.
- COORDINATE LOCATION OF ALL EMBEDS WITH MECHANICAL, ELECTRICAL, PLUMBING, AND EXTERIOR WALL SYSTEMS PRIOR TO CASTING THE SLAB.
- SEE ARCHITECTURAL, MECHANICAL, PLUMBING, ELECTRICAL, AND OTHER DISCIPLINES DRAWINGS FOR OPENING SIZES AND LOCATIONS NOT SHOWN ON PLAN. SEE "TYPICAL OPENINGS AND EMBEDMENTS IN CONCRETE" DETAILS FOR OPENING PLACEMENT CRITERIA. NOTIFY THE STRUCTURAL ENGINEER OF ANY OPENINGS NOT SHOWN ON THE STRUCTURAL DRAWINGS FOR WHICH THE TYPICAL DETAILS DO NOT APPLY.
- REFERENCE ALL CONSTRUCTION DOCUMENTS FOR SIZE, EXTENT, AND LOCATION OF CONCRETE CURBS, HOUSEKEEPING PADS, CMU WALLS, PLANTER WALLS, BOLLARDS, AND EDGE ANGLES. REINFORCE PER THE TYPICAL DETAILS.

**8 PARTIAL FRAMING PLAN - ELEVATOR OVERRUN**

1/8" = 1'-0"

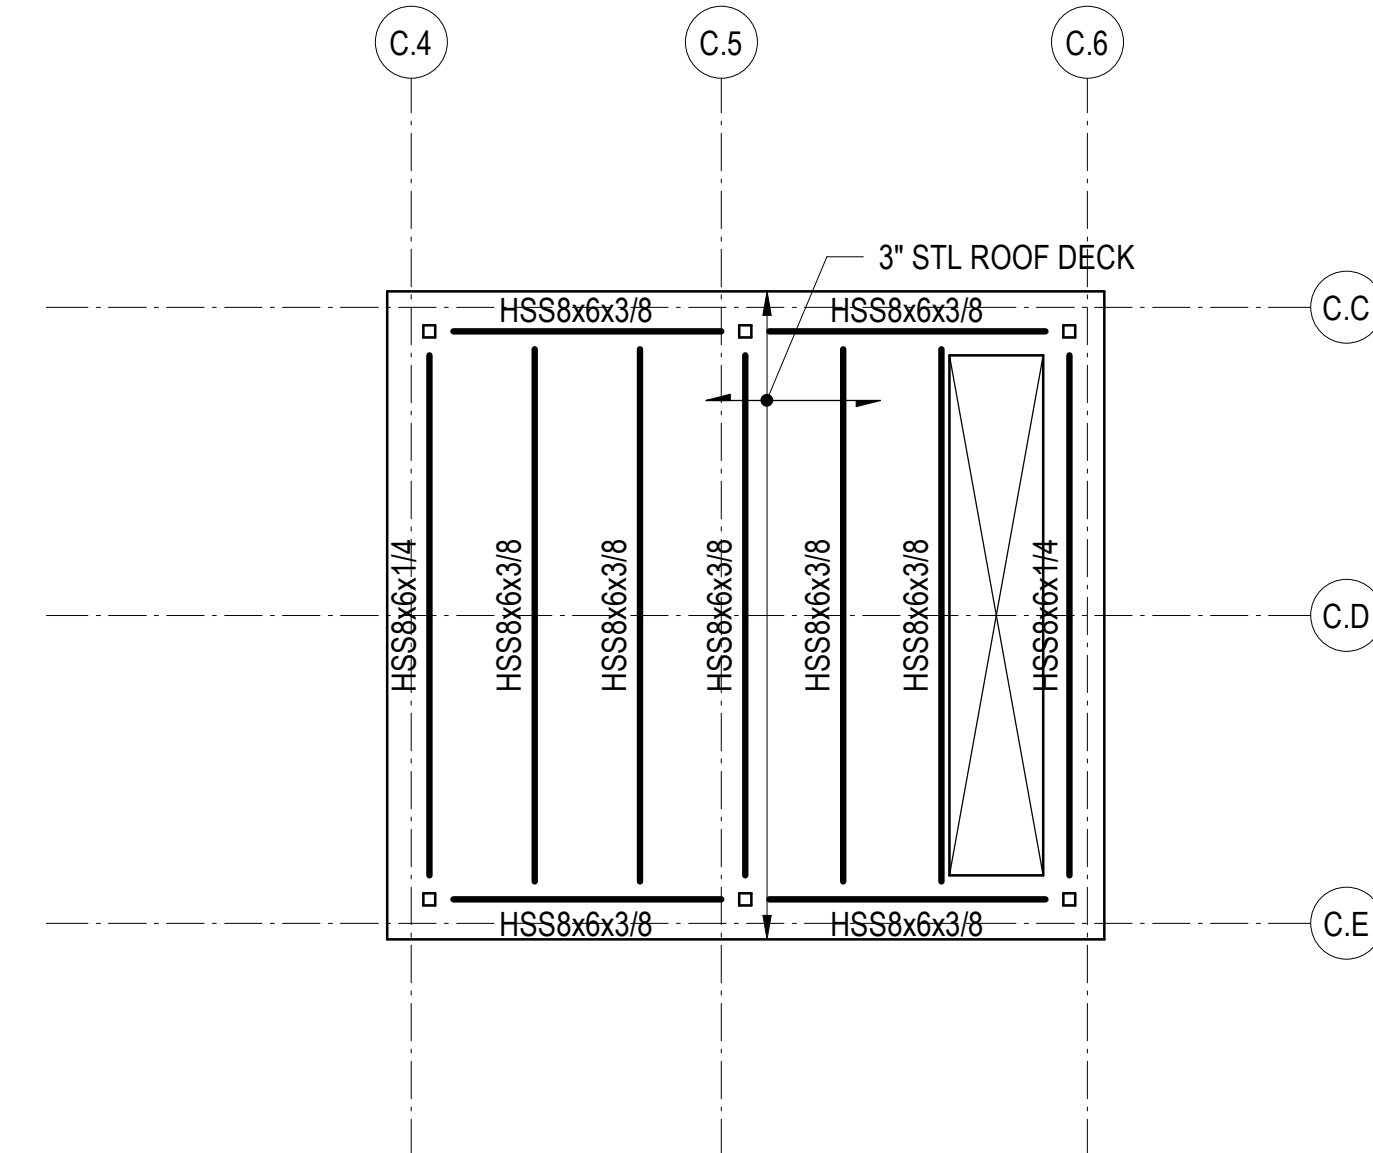


**NOTES:**

- REFERENCE FLOOR ELEVATION IS 8485'-3". REFERENCE TOP OF STRUCTURAL STEEL IS 3-INCHES BELOW THE REFERENCE FLOOR ELEVATION, TYPICAL UNLESS NOTED OTHERWISE.
- ROOF DECK IS MINIMUM 3-INCH x 20 GAUGE STEEL DECKING. DECKING IS TO BE INSTALLED IN MINIMUM THREE SPAN CONDITIONS WHERE POSSIBLE.

**9 PARTIAL PLAN - TOP OF CORE**

1/8" = 1'-0"

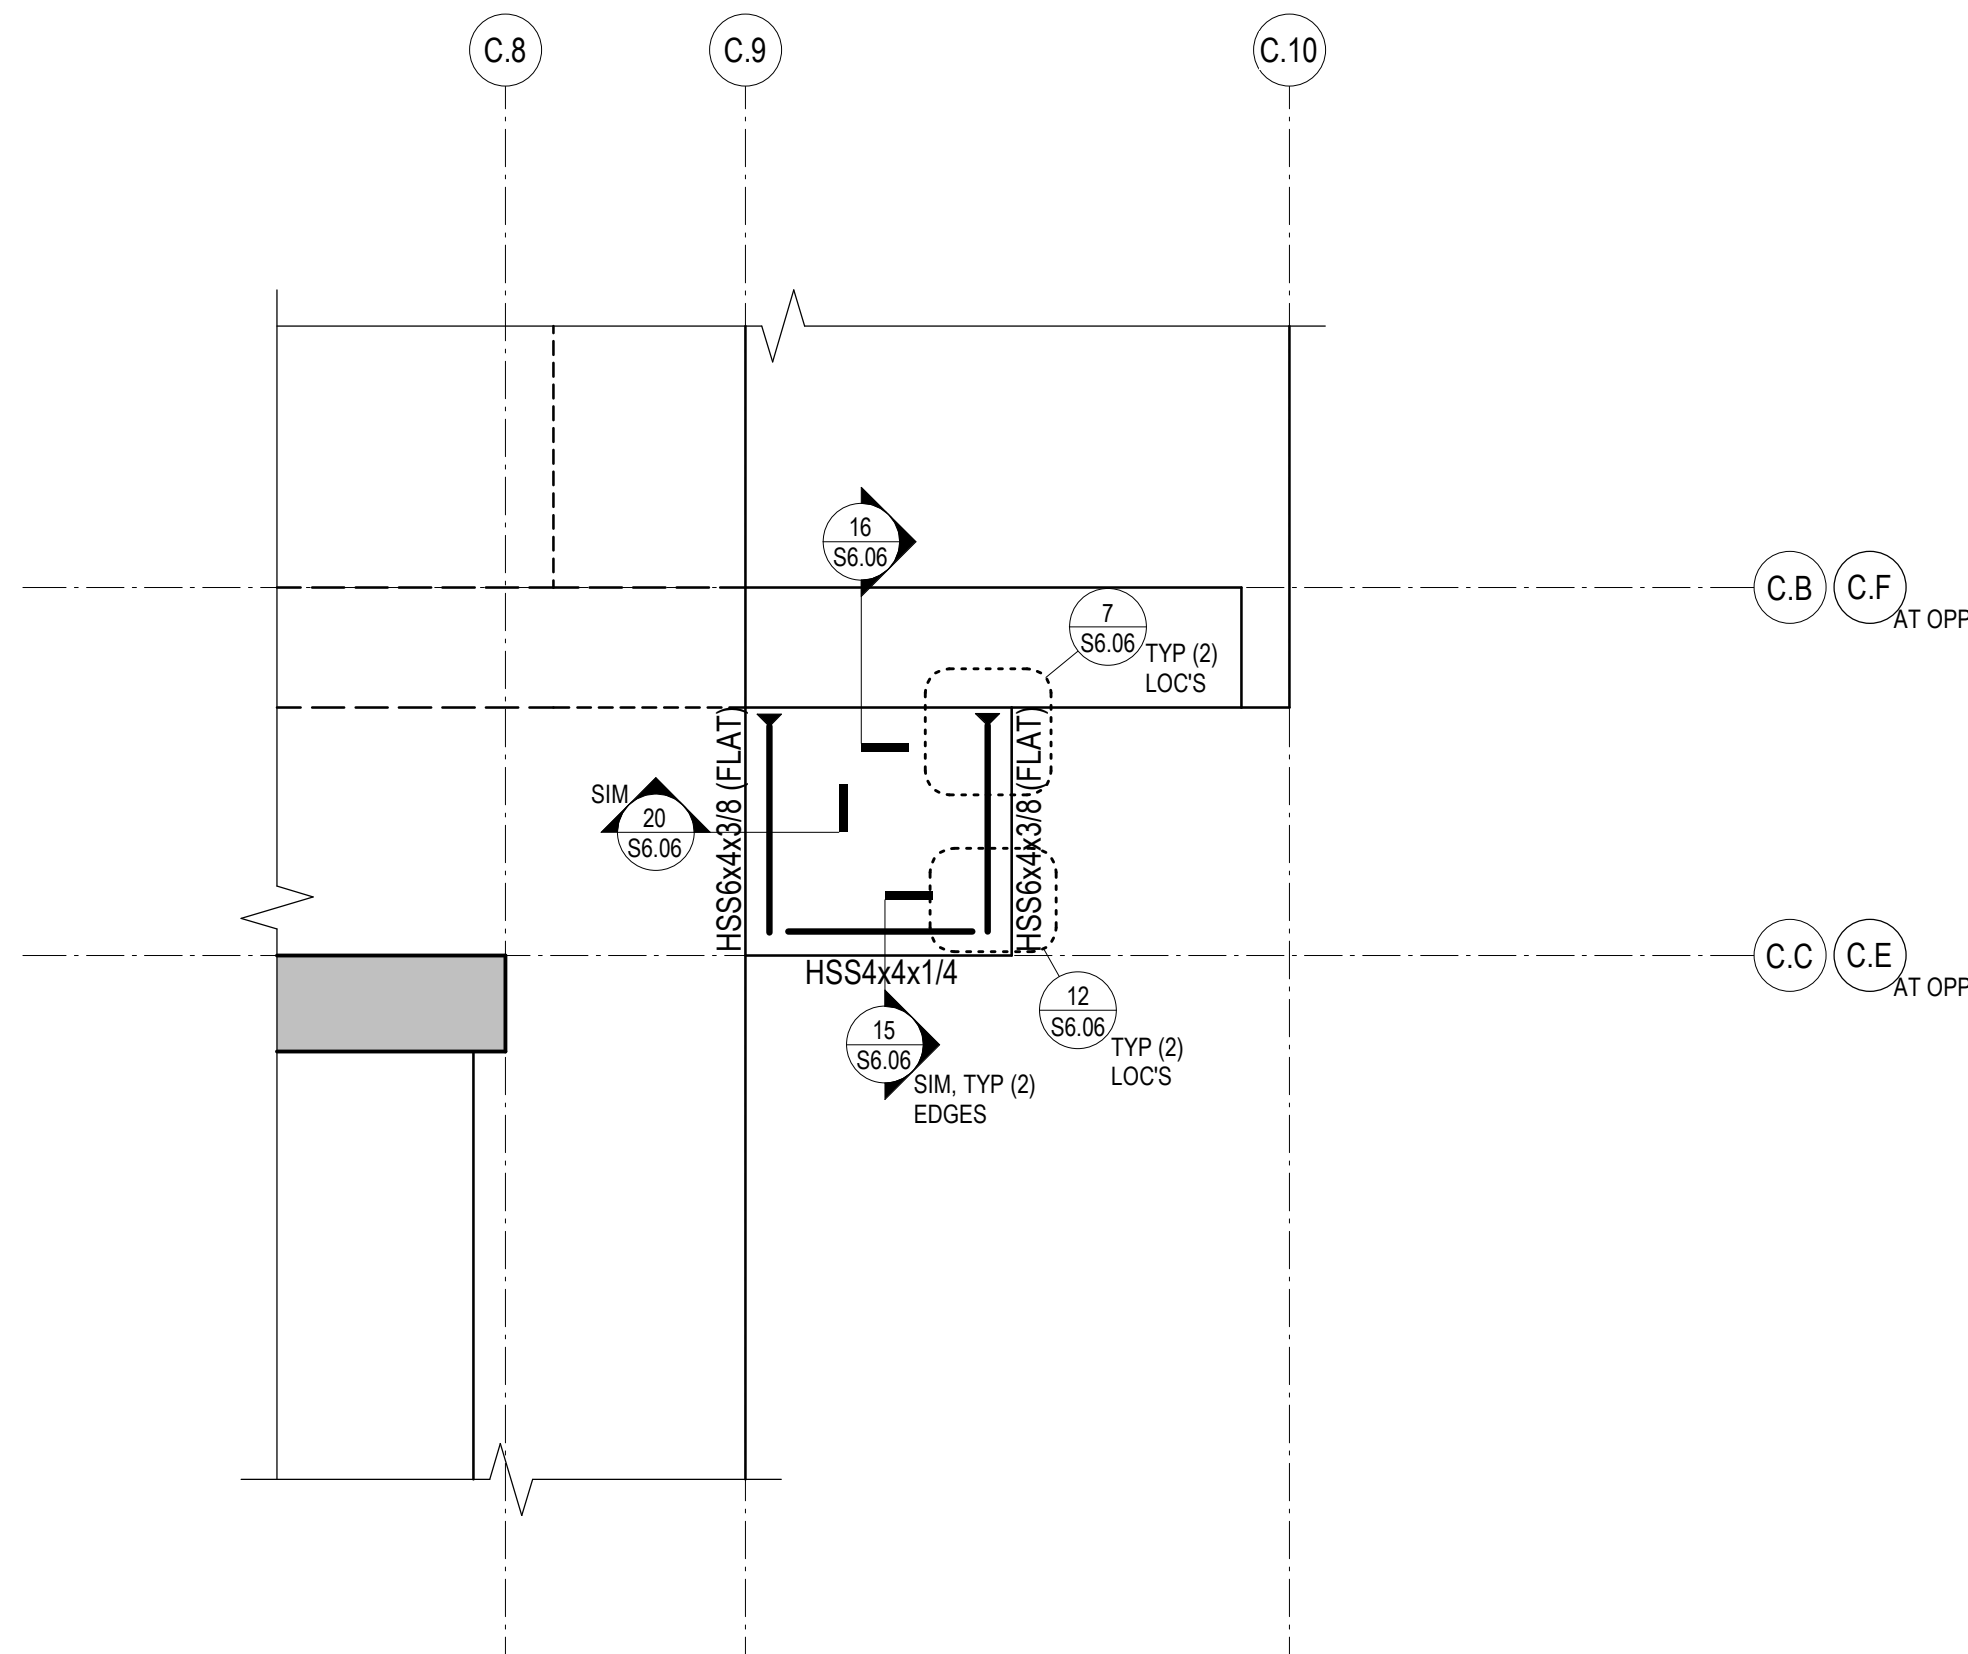


**NOTES:**

- SEE RELEVANT PLANS FOR REFERENCE ELEVATION. TOP OF STEEL IS AT BOTTOM OF DECK UNLESS NOTED OTHERWISE.
- STRUCTURAL SLAB IS 3-INCHES OF CONCRETE ON 3-INCH COMPOSITE STEEL DECK UNLESS NOTED OTHERWISE. REINFORCE WITH WWR 6x6-W2.9xW2.9. SEE TYPICAL SLAB ON STEEL DECK DETAILS FOR REINFORCING AND OTHER INFORMATION. REINFORCING SHOWN ON THE PLAN AND IN THE TYPICAL DETAILS IS IN ADDITION TO THIS REINFORCING.

**11 PARTIAL PLAN - TYPE 5 BALCONY**

1/4" = 1'-0"

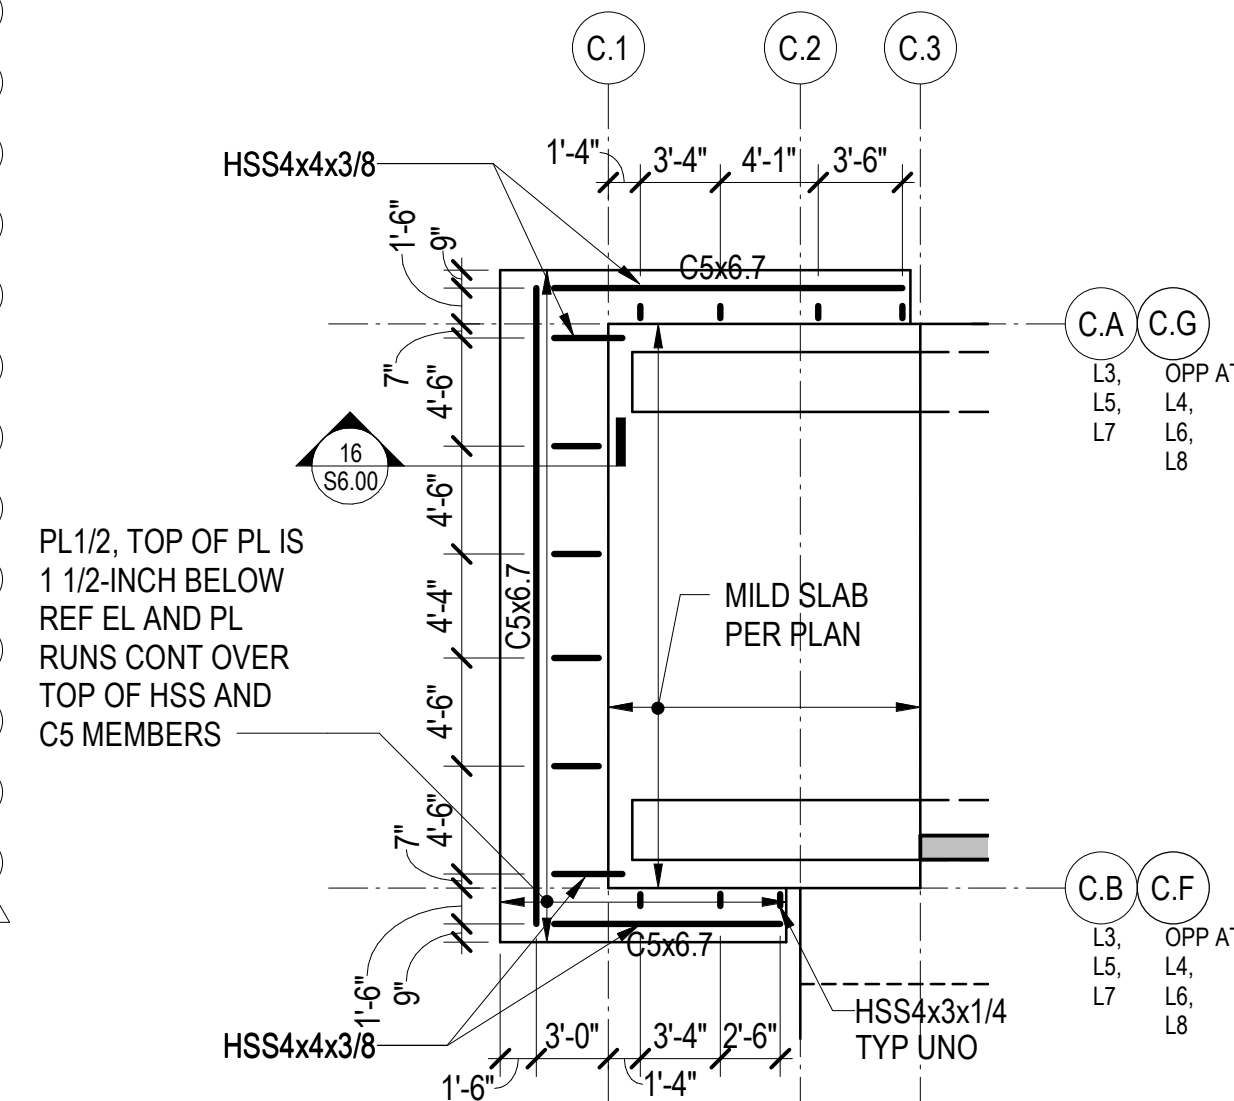

**NOTES:**

- REFERENCE FLOOR ELEVATIONS ARE:  
TOWER C LEVEL 3: 8402'-6"  
TOWER C LEVEL 4: 8414'-6"  
TOWER C LEVEL 5: 8426'-6"  
TOWER C LEVEL 6: 8438'-6"  
TOWER C LEVEL 7: 8450'-6"  
TOWER C LEVEL 8: 8463'-0"
- SEE ARCHITECTURAL DETAILS FOR ADDITIONAL INFORMATION.

**18 PARTIAL PLAN - TOWER C SUNSHADES**

1/8" = 1'-0"




**NOTES:**

- REFERENCE ELEVATION IS 8374'-6". SEE SECTIONS FOR ADDITIONAL INFORMATION.
- COORDINATE ALL DIMENSIONS WITH ARCHITECTURE.


**15 PARTIAL PLAN - TOWER C ENTRY CANOPY**

1/8" = 1'-0"

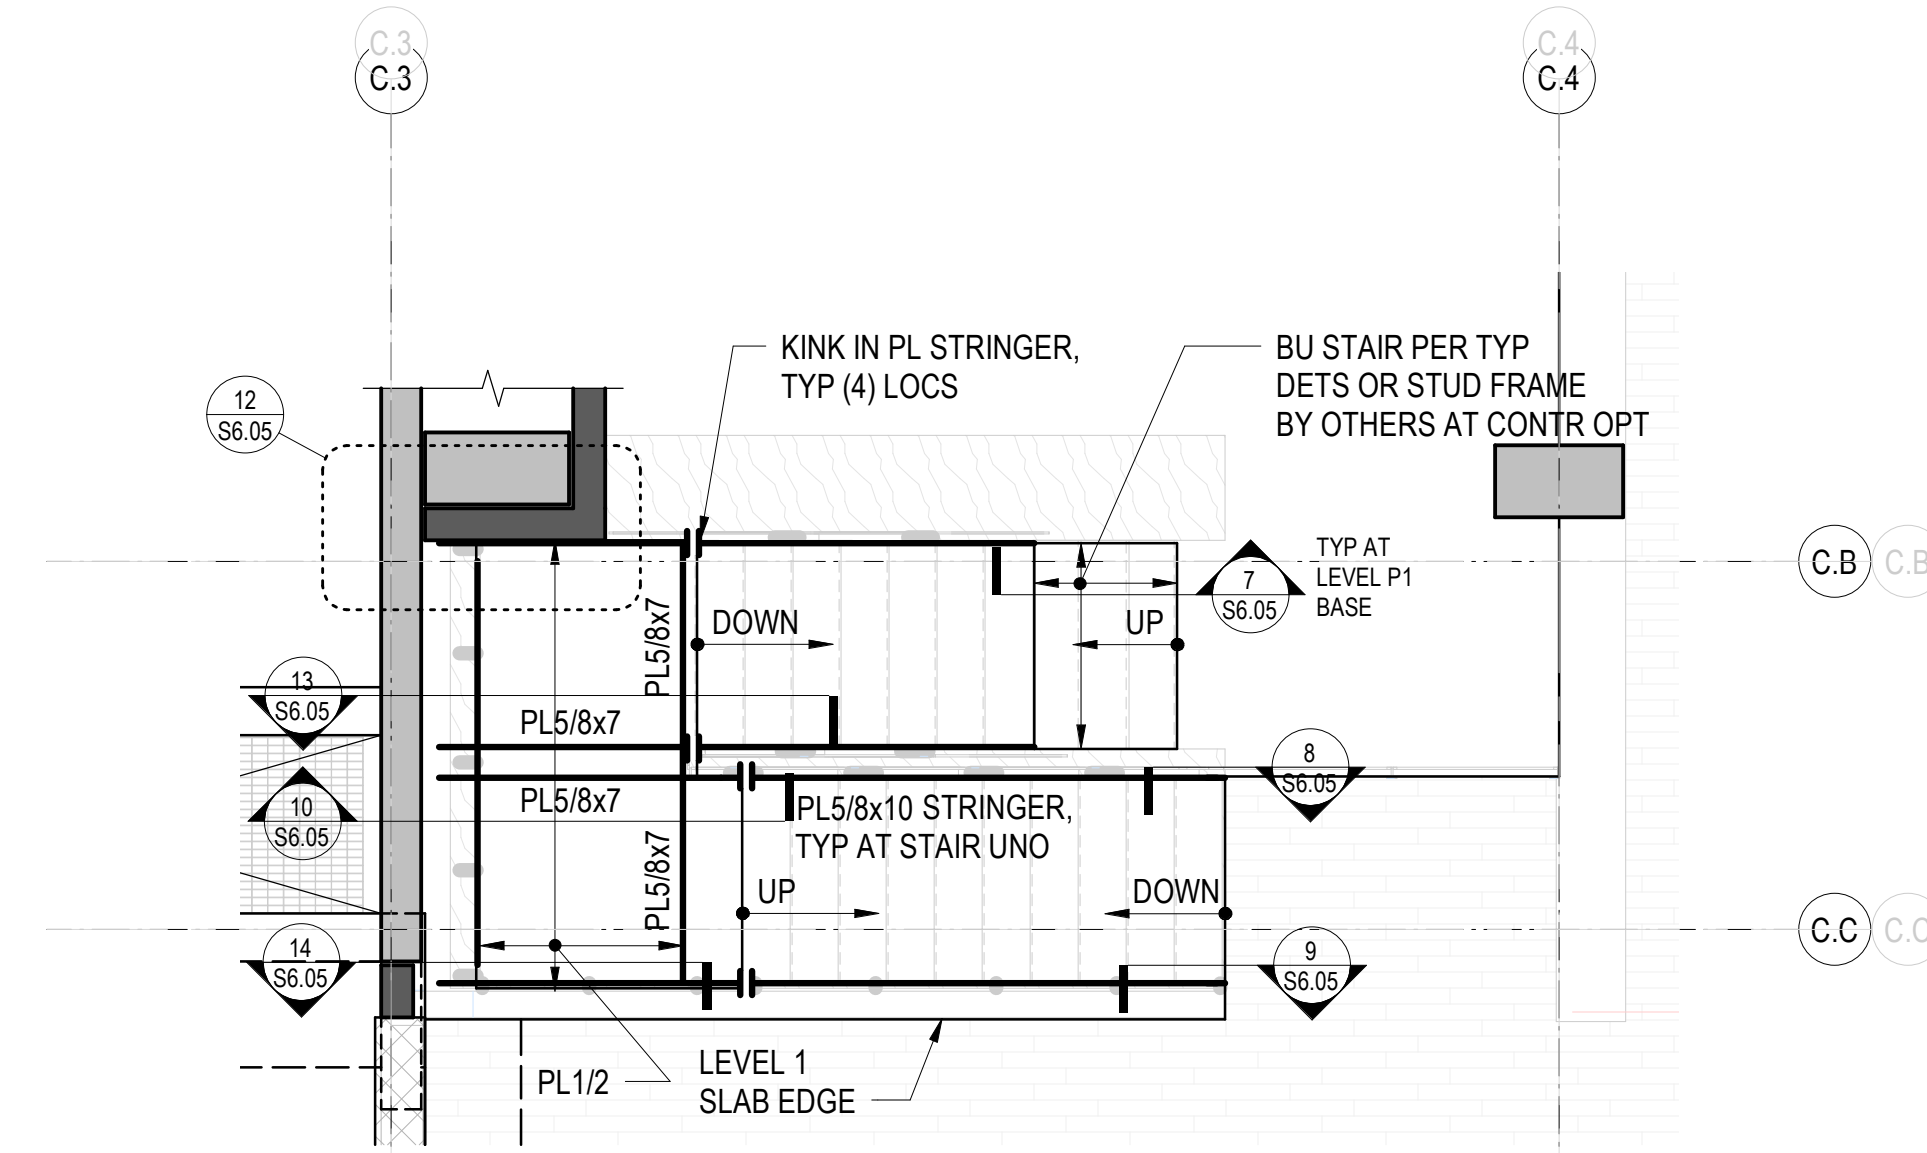

**20 PARTIAL PLAN - TOWER C FUTURE STAIR**

1/4" = 1'-0"



Reserved for permit stamp

150 South Jackson St., Suite 800  
Seattle, Washington 98104 USA  
+1 206 624 8700 olsonkundig.com

**Olson Kundig**

project:  
**SOMMET BLANC - ABC**  
DEER VALLEY, UTAH

**MAGNUSSON KLEMENCIC ASSOCIATES**

Structural + Civil Engineers

Seattle Chicago  
www.mka.com  
206.292.1200

principal architect \_\_\_\_\_  
project manager \_\_\_\_\_  
drawn by \_\_\_\_\_

checked by \_\_\_\_\_  
job no. 20052  
date 05/17/2024

revisions:

7 1/28/2025 ASI-007.1  
5 01/07/2025 ASI-007  
1 09/17/2024 IFC.2  
04/08/2024 IFC SET 1 OF 3  
11/18/2022 95% CD

no. date by



IFC SET 2 OF 3

05/17/2024

TOWER C PARTIAL PLANS


**S2.C.50**



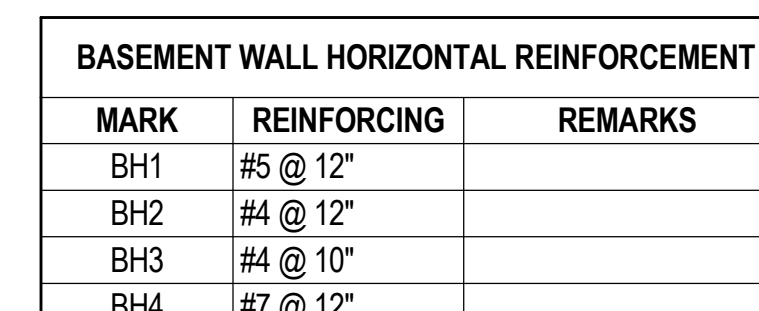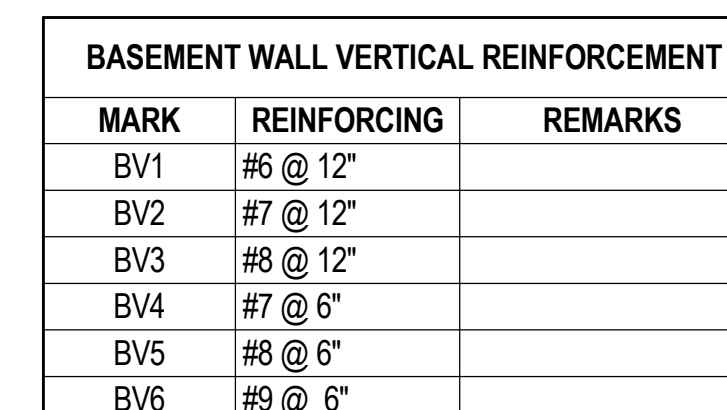


LEVEL B1 - KEY PLAN




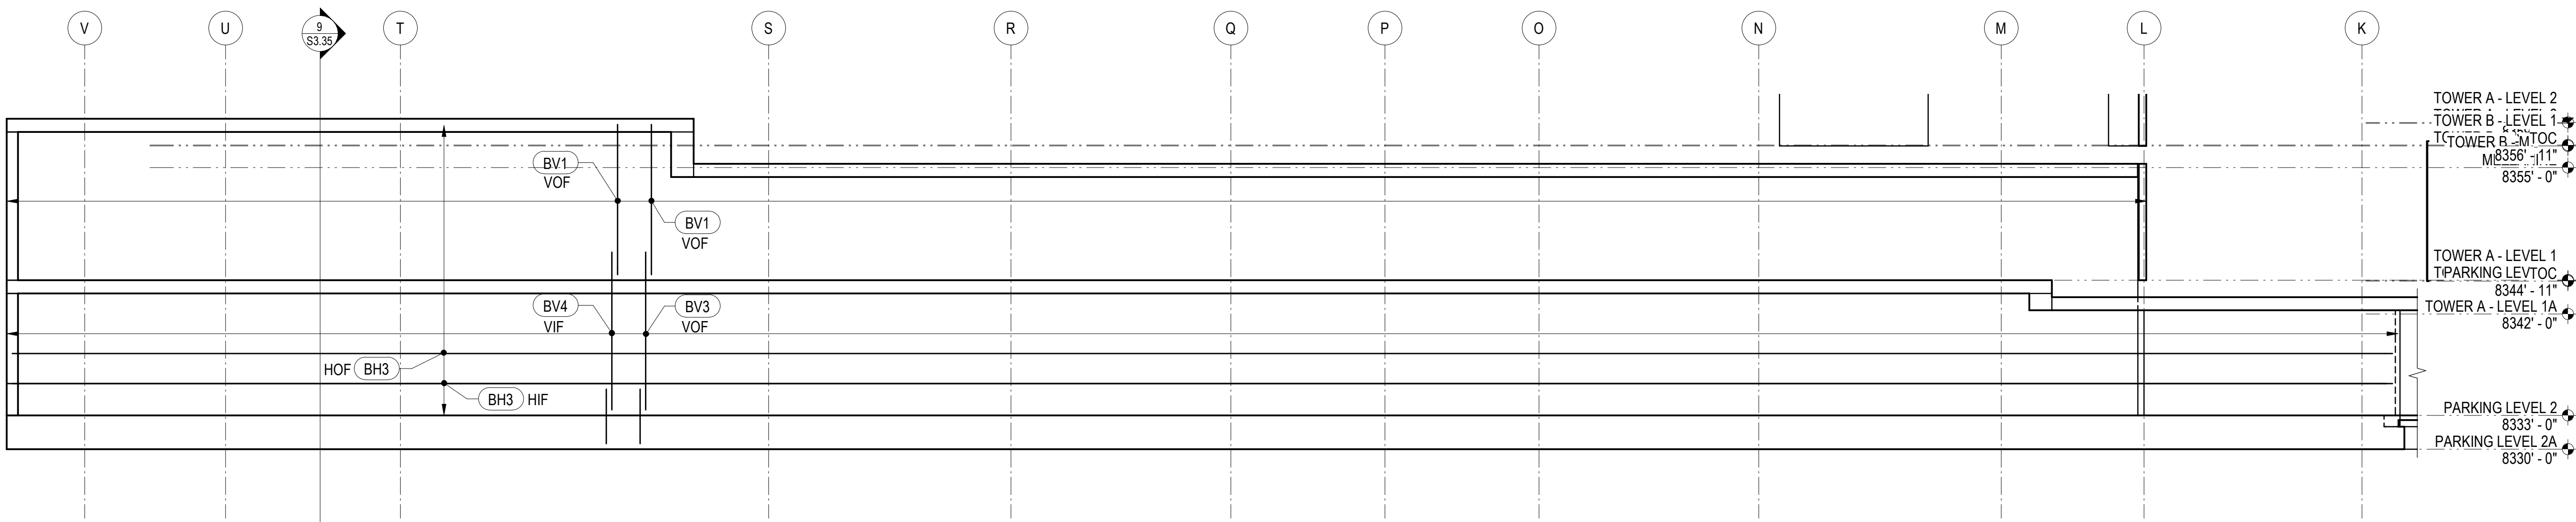


26 BASEMENT WALL ELEVATION  
1/8" = 1'-0"

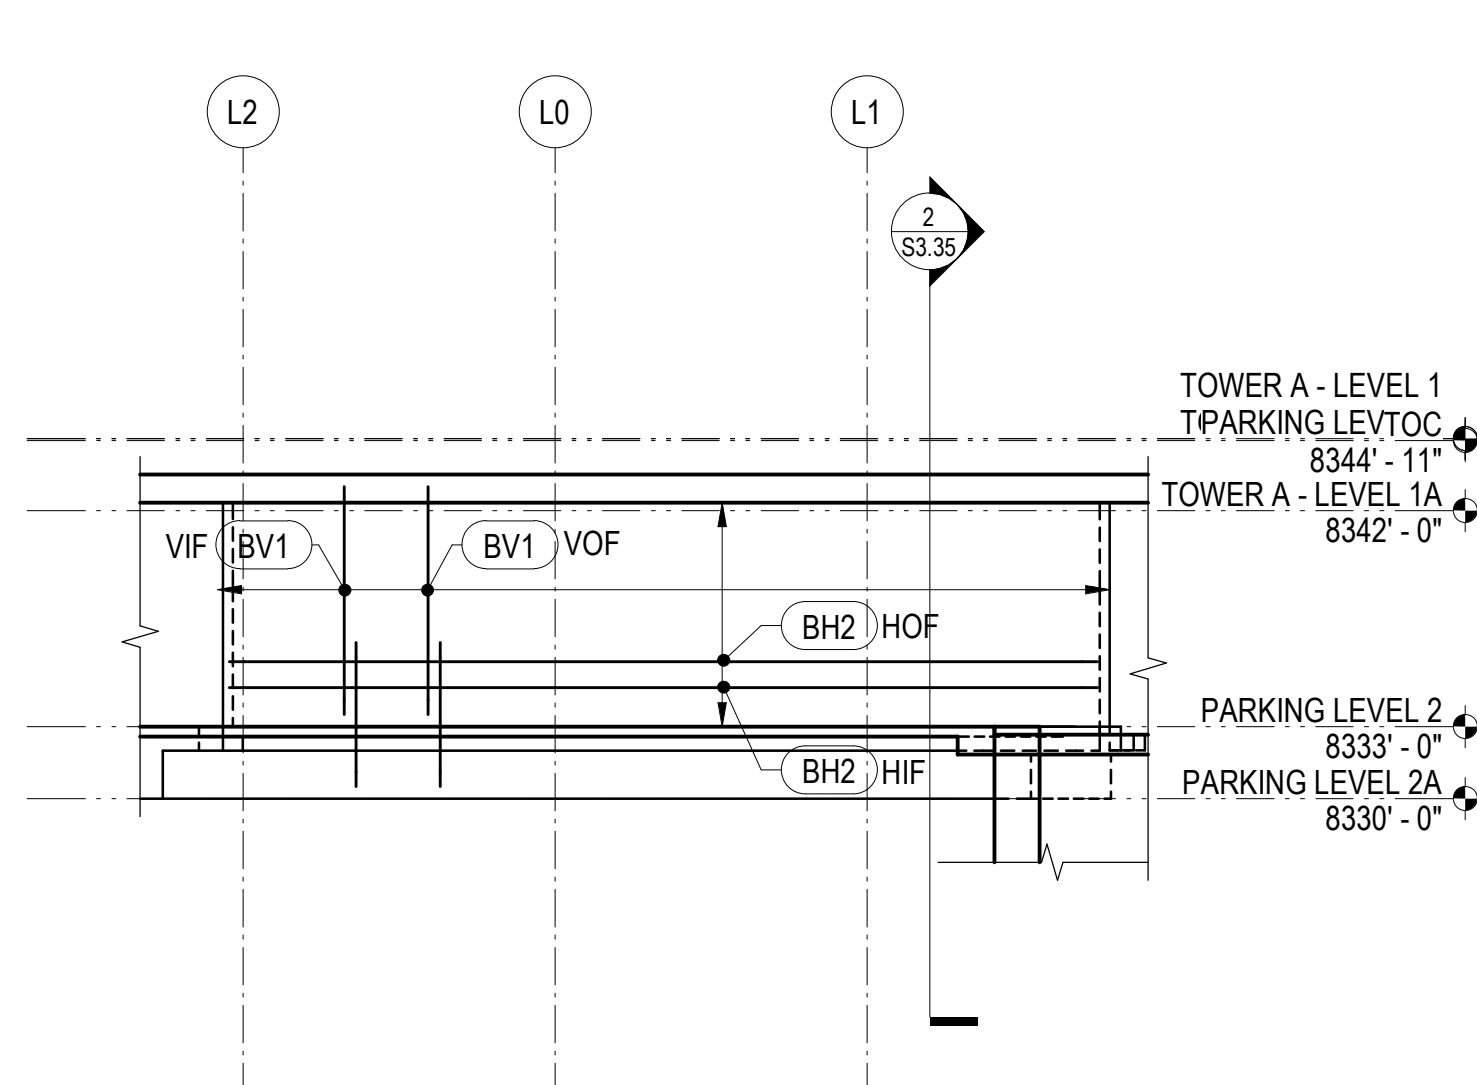


27 BASEMENT WALL ELEVATION  
1/8" = 1'-0"

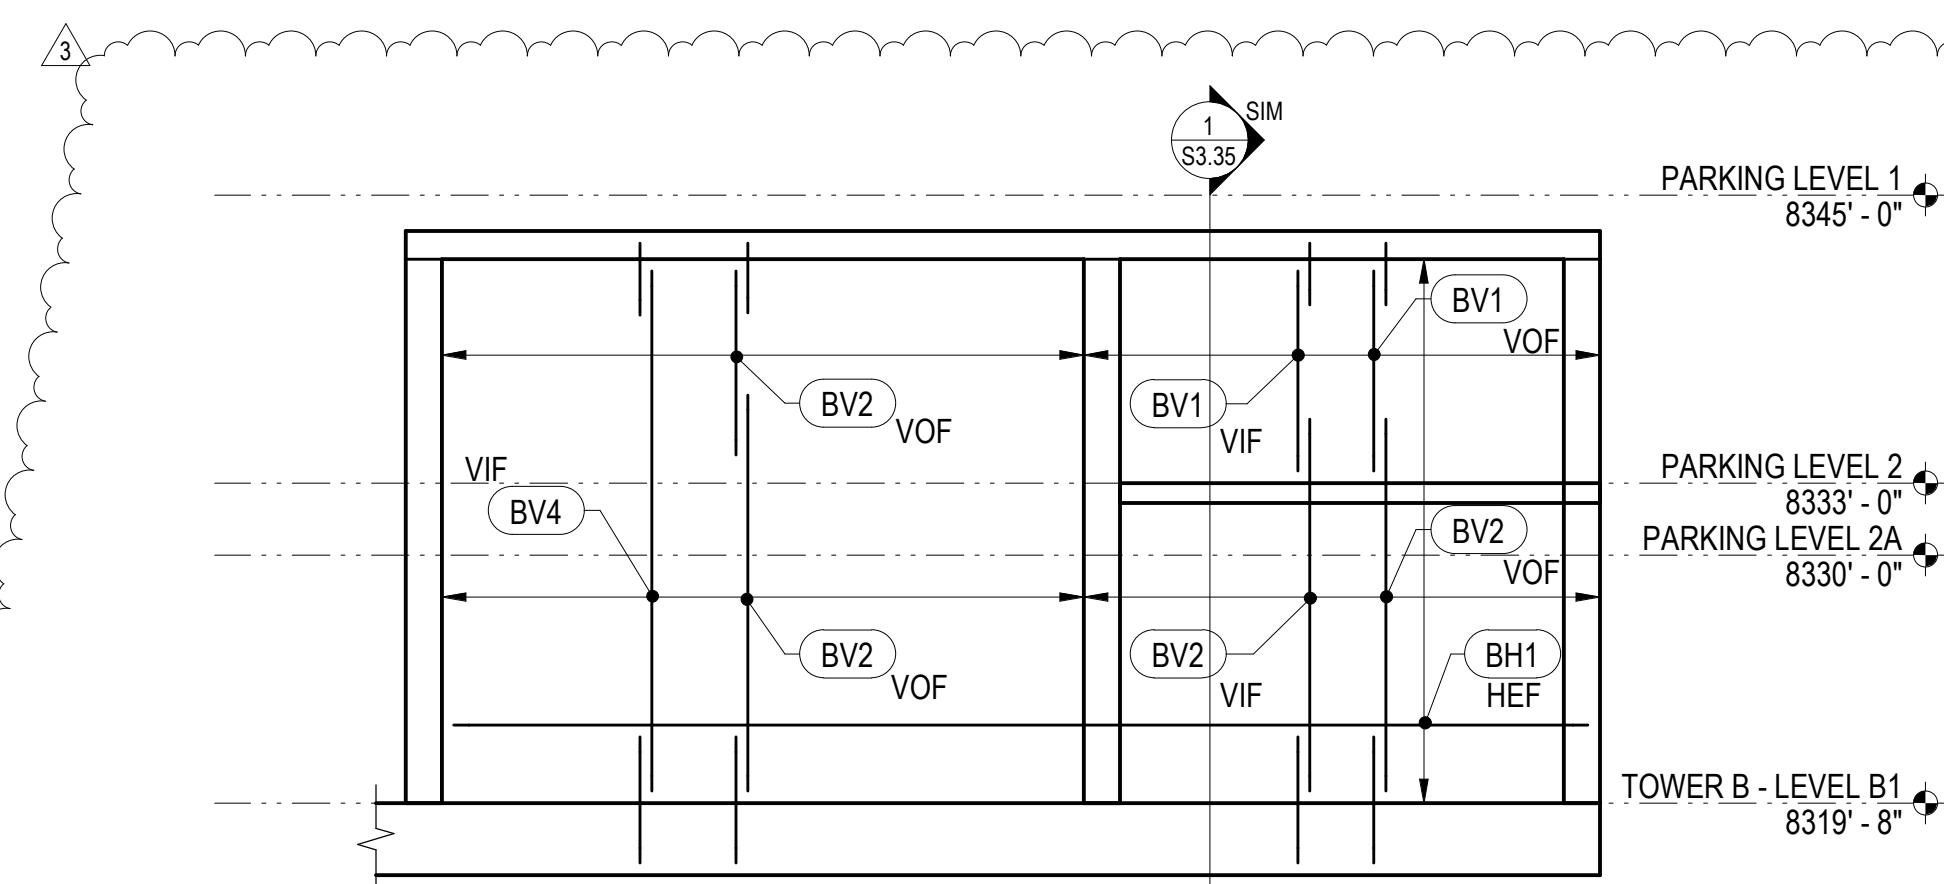


28 BASEMENT WALL ELEVATION  
1/8" = 1'-0"

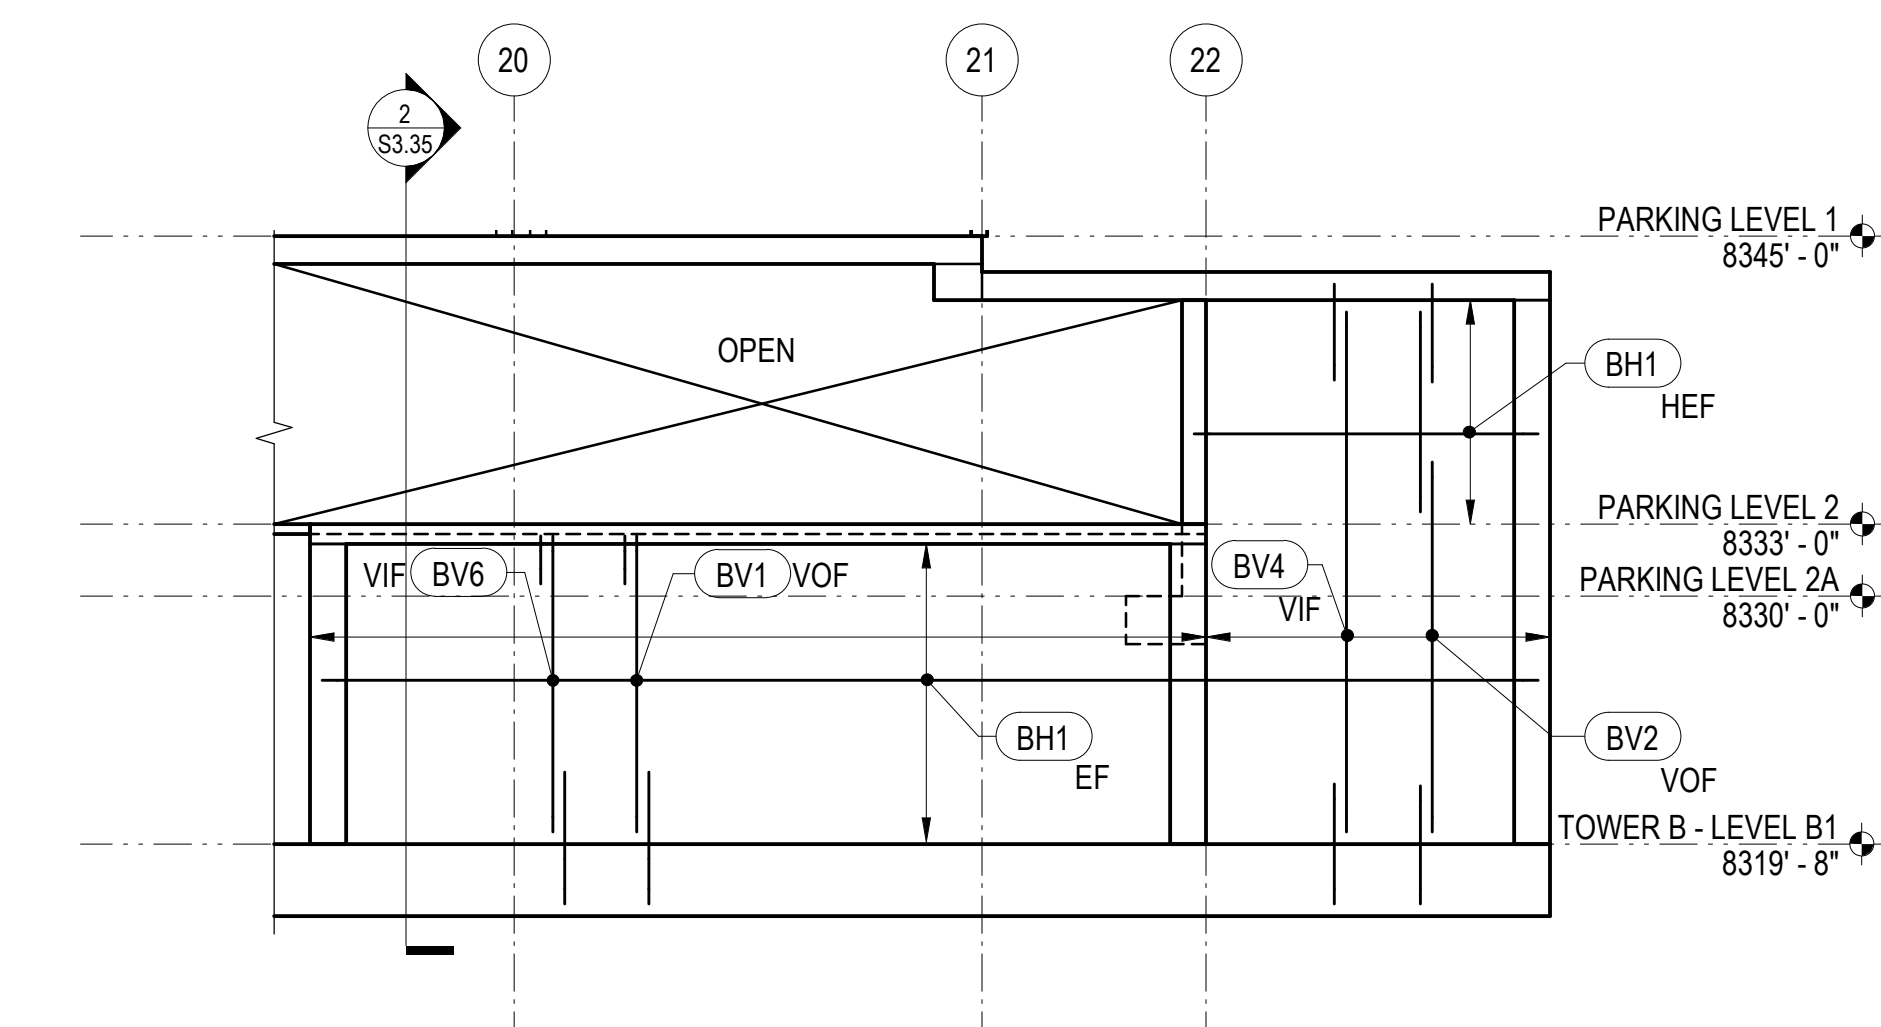

29 BASEMENT WALL ELEVATION  
1/8" = 1'-0"

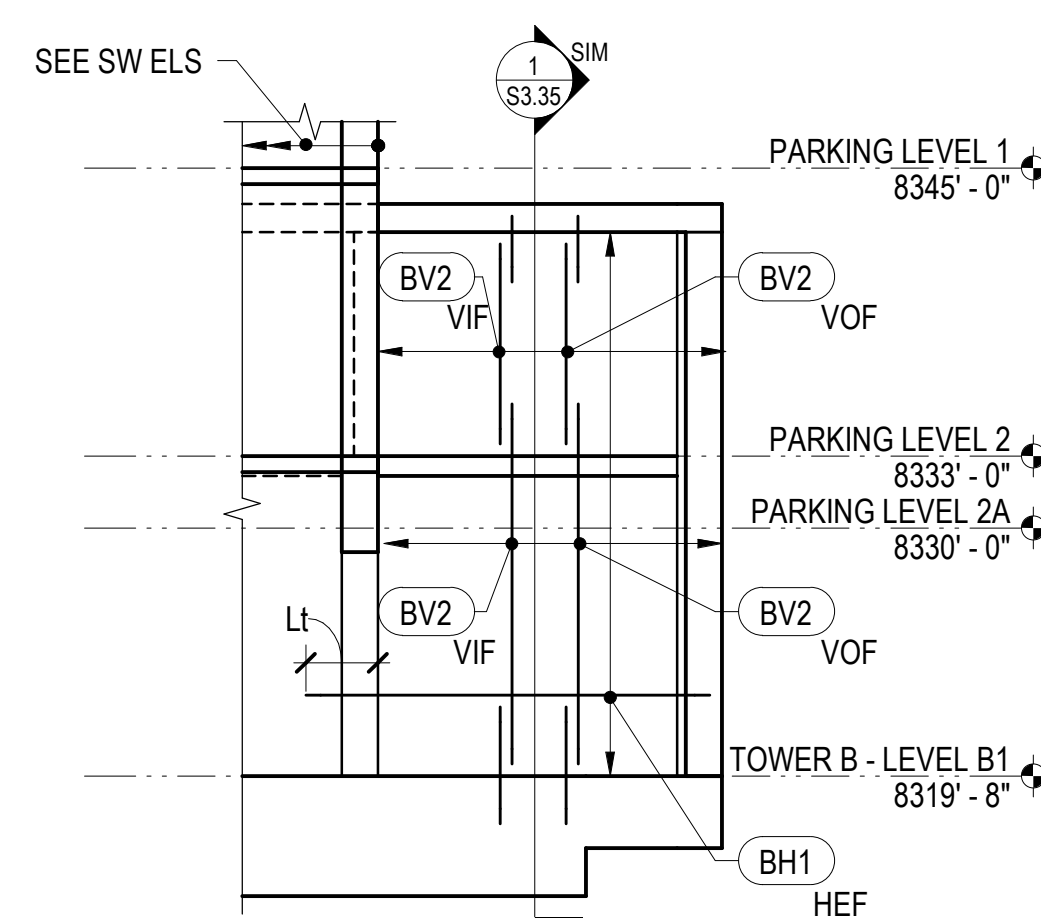


30 BASEMENT WALL ELEVATION  
1/8" = 1'-0"

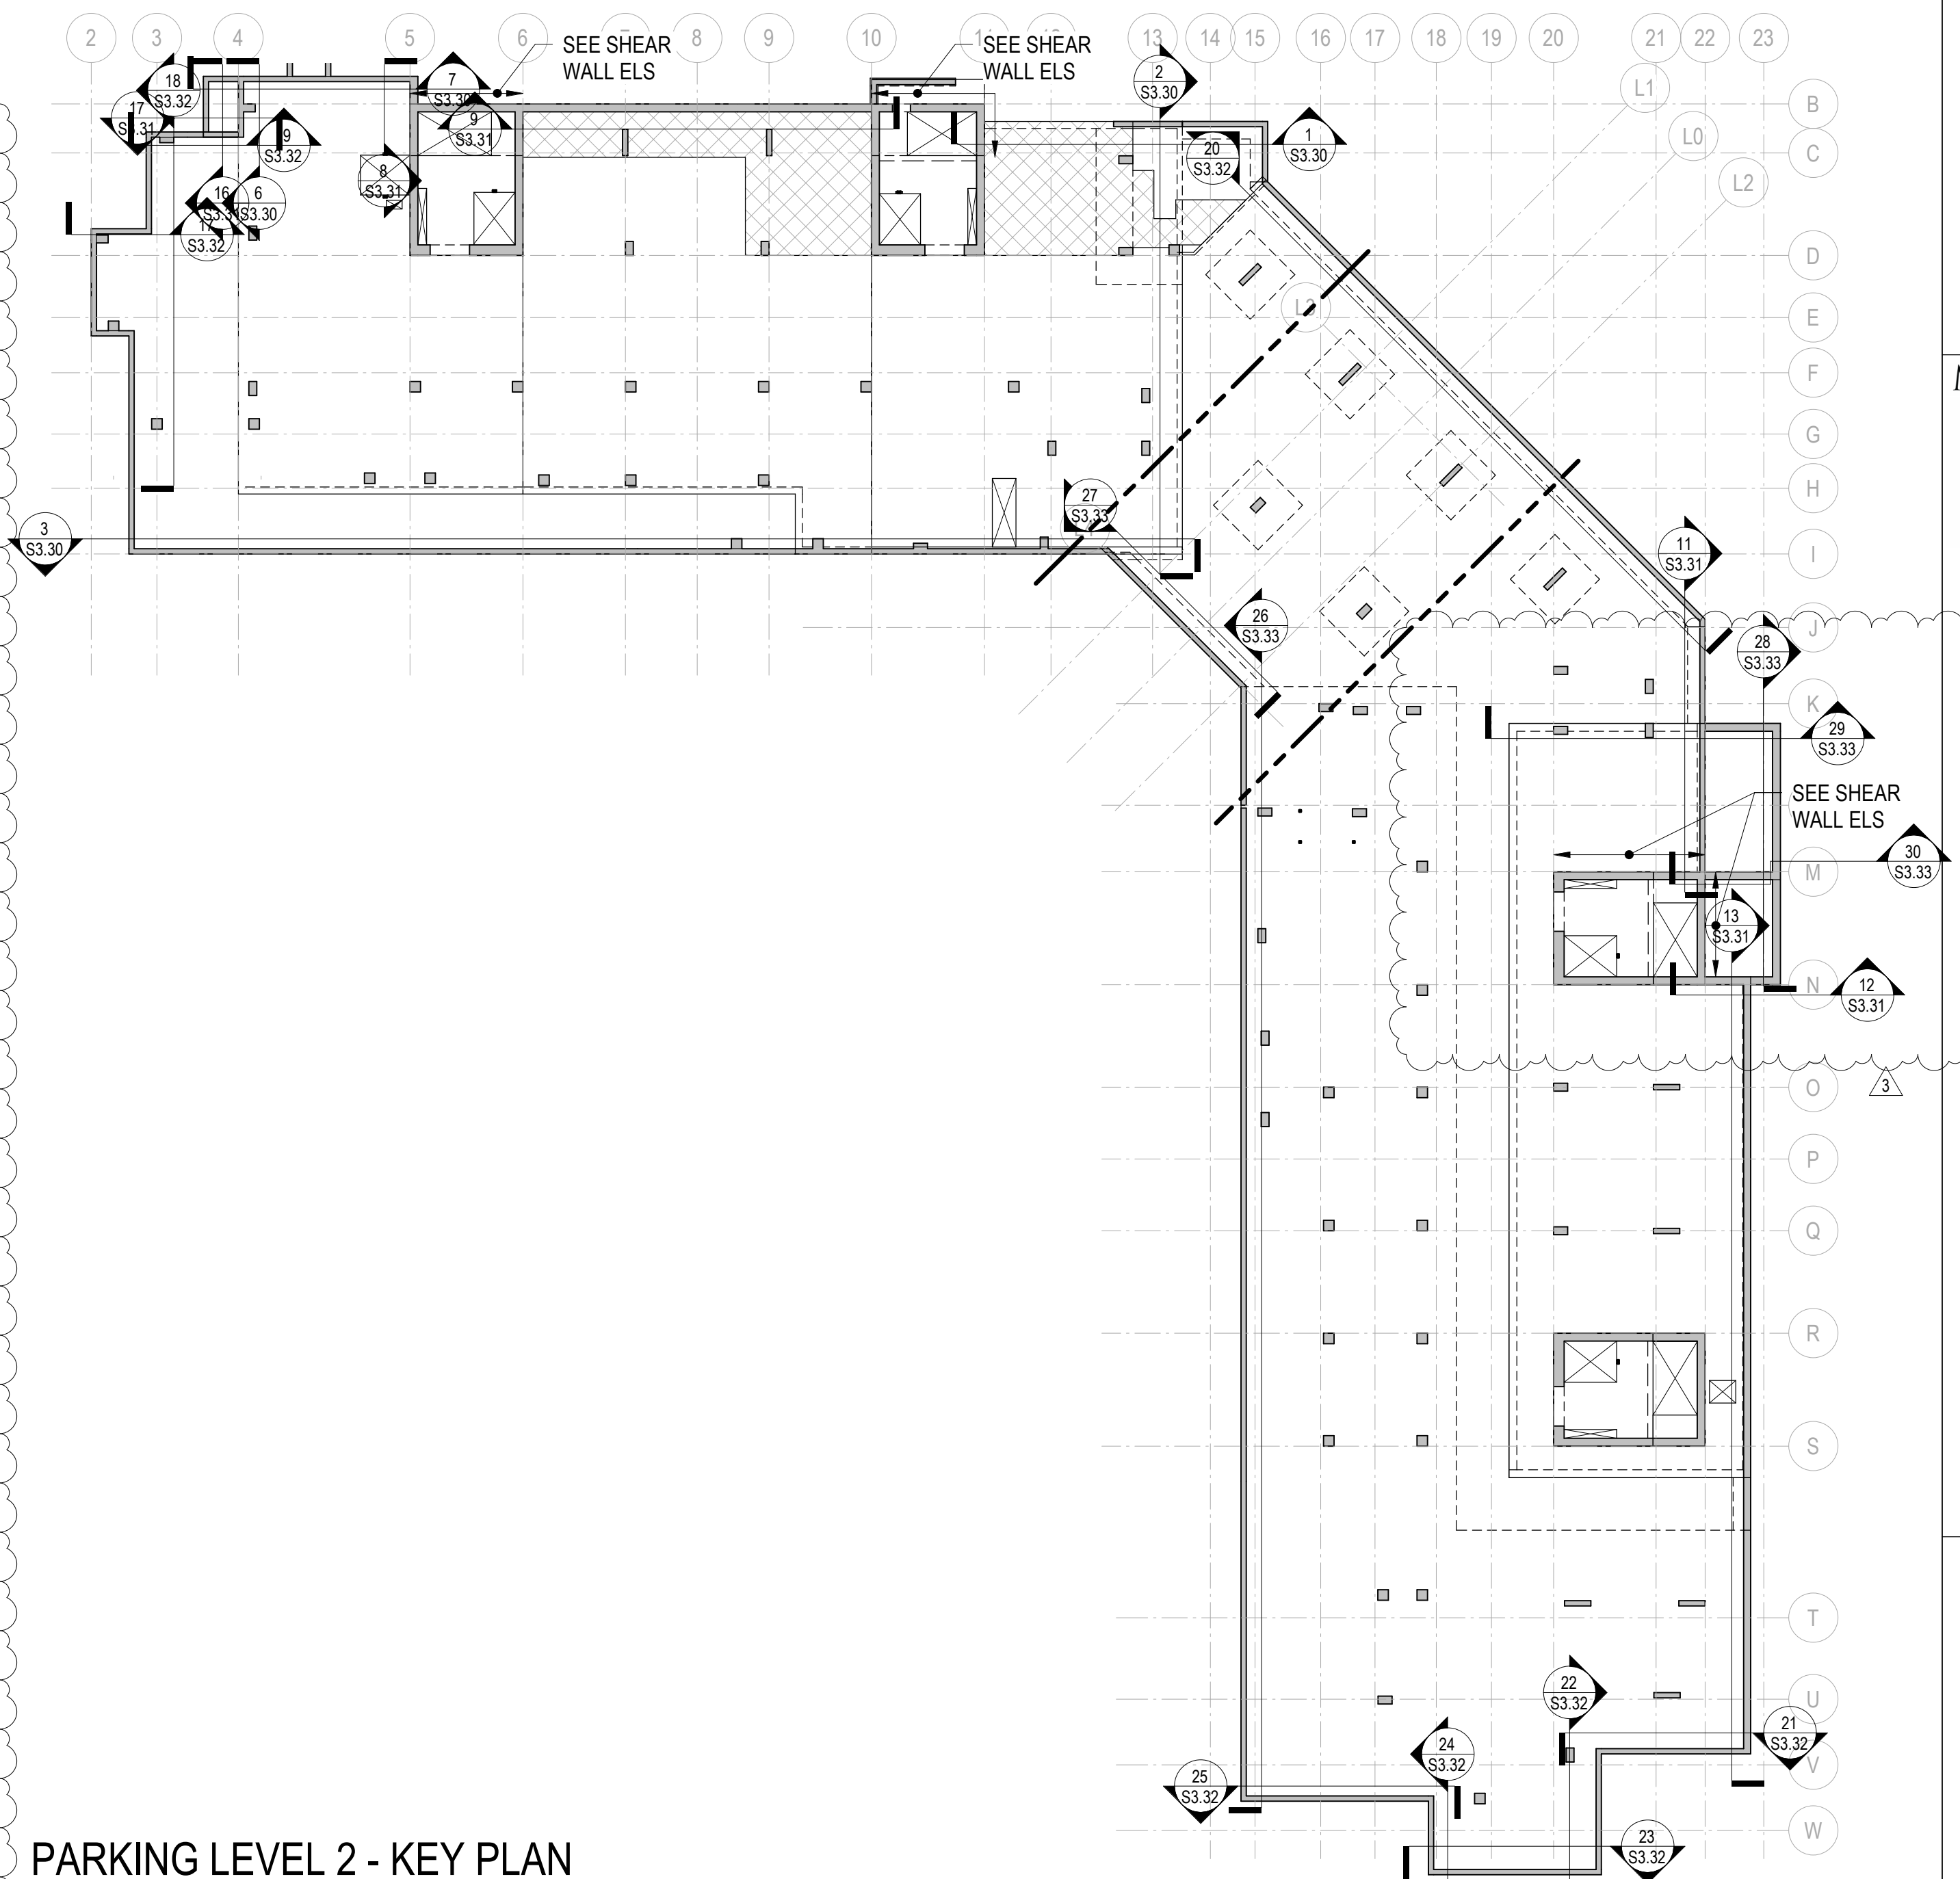

PARKING LEVEL 2 - KEY PLAN

BASEMENT WALL VERTICAL REINFORCEMENT		
MARK	REINFORCING	REMARKS
BV1	#6 @ 12"	
BV2	#7 @ 12"	
BV3	#8 @ 12"	
BV4	#7 @ 6"	
BV5	#8 @ 6"	
BV6	#9 @ 6"	

BASEMENT WALL HORIZONTAL REINFORCEMENT		
MARK	REINFORCING	REMARKS
BH1	#5 @ 12"	
BH2	#4 @ 12"	
BH3	#4 @ 10"	
BH4	#7 @ 12"	



Reserved for permit stamp

150 South Jackson St., Suite 800  
Seattle, Washington 98104 USA  
+1 206 624 8970 olsonkundig.com

Olson Kundig

project  
SOMMET BLANC - ABC  
DEER VALLEY, UTAH

MAGNUSSON  
KLEMENCIC  
ASSOCIATES

Structural + Civil Engineers  
Seattle, Chicago  
www.mka.com  
206.292.1200

principal architect \_\_\_\_\_  
project manager \_\_\_\_\_  
drawn by \_\_\_\_\_

checked by \_\_\_\_\_  
job no. 20052  
date 05/17/2024

revisions:

3 8/19/2024 ASI-004  
2 7/26/2024 ASI-002  
04/06/2024 IFC SET 1 OF 3  
11/18/2022 95% CD

no. date by


IFC SET 2 OF 3

05/17/2024

TOWER A & B  
BASEMENT WALL  
ELEVATIONS

S3.33










Reserved for permit stamp

150 South Jackson St., Suite 800  
Seattle, Washington 98104 USA  
+1 206 624 9707 olsonkundig.com

Olson Kundig


project:  
SOMMET BLANC - ABC  
DEER VALLEY, UTAH

MAGNUSSON  
KLEMENCIC  
ASSOCIATES  
Structural + Civil Engineers  
Seattle, Chicago  
www.mka.com  
206.292.1200

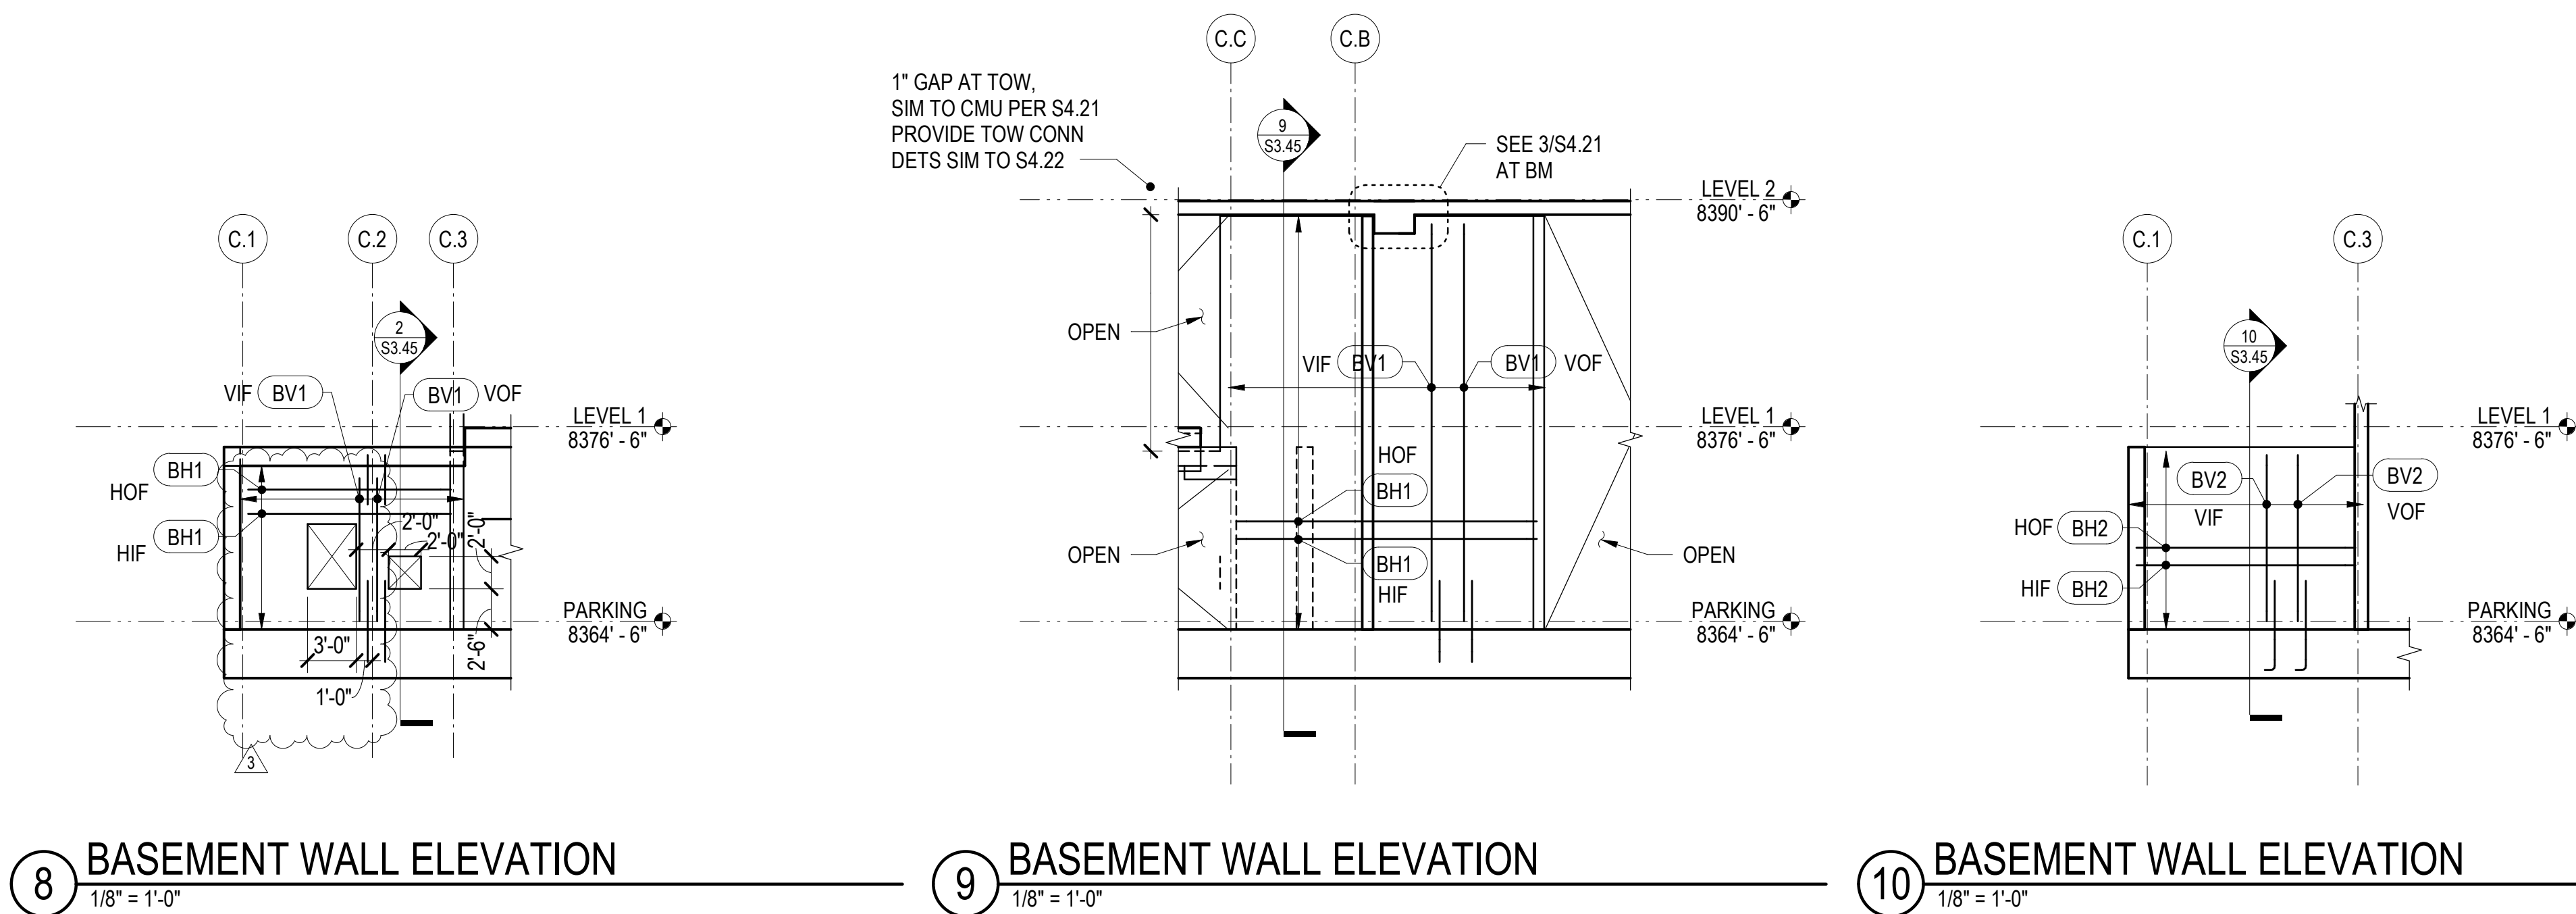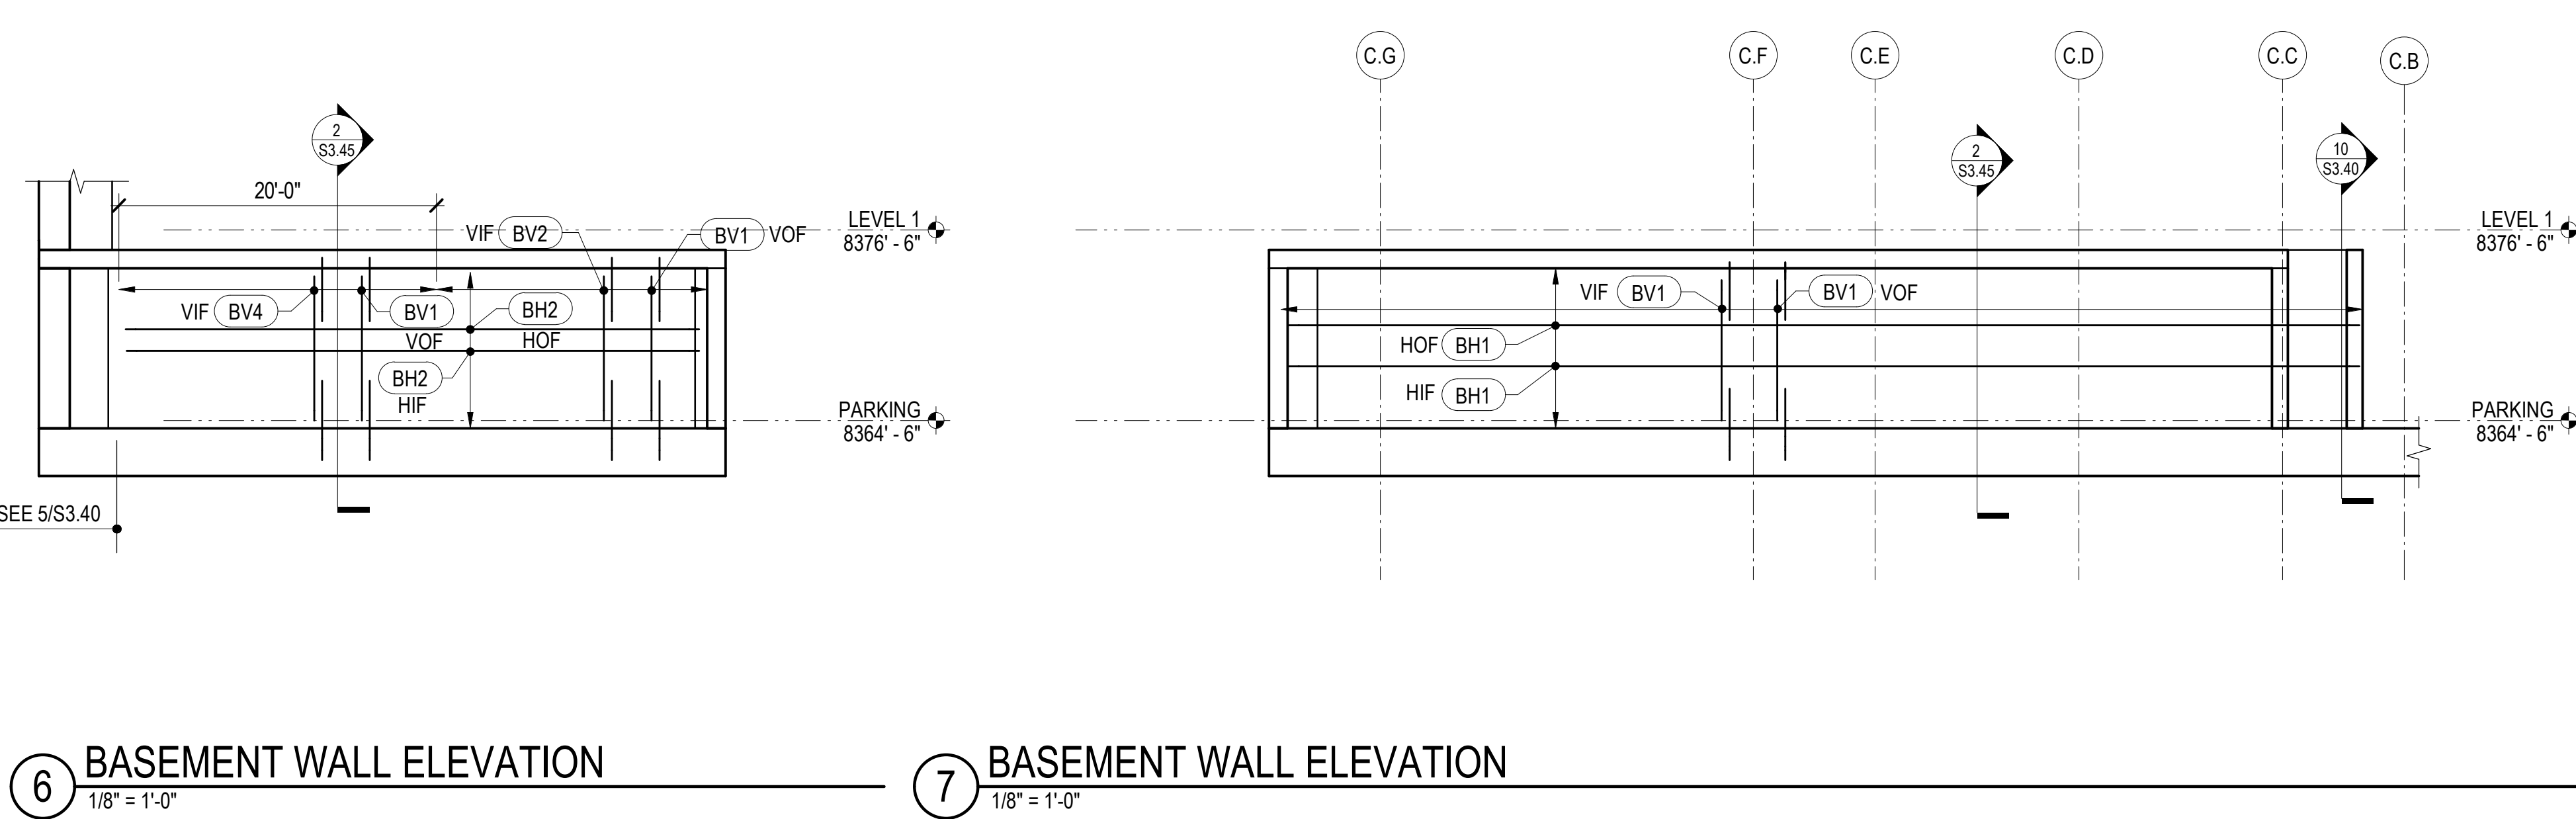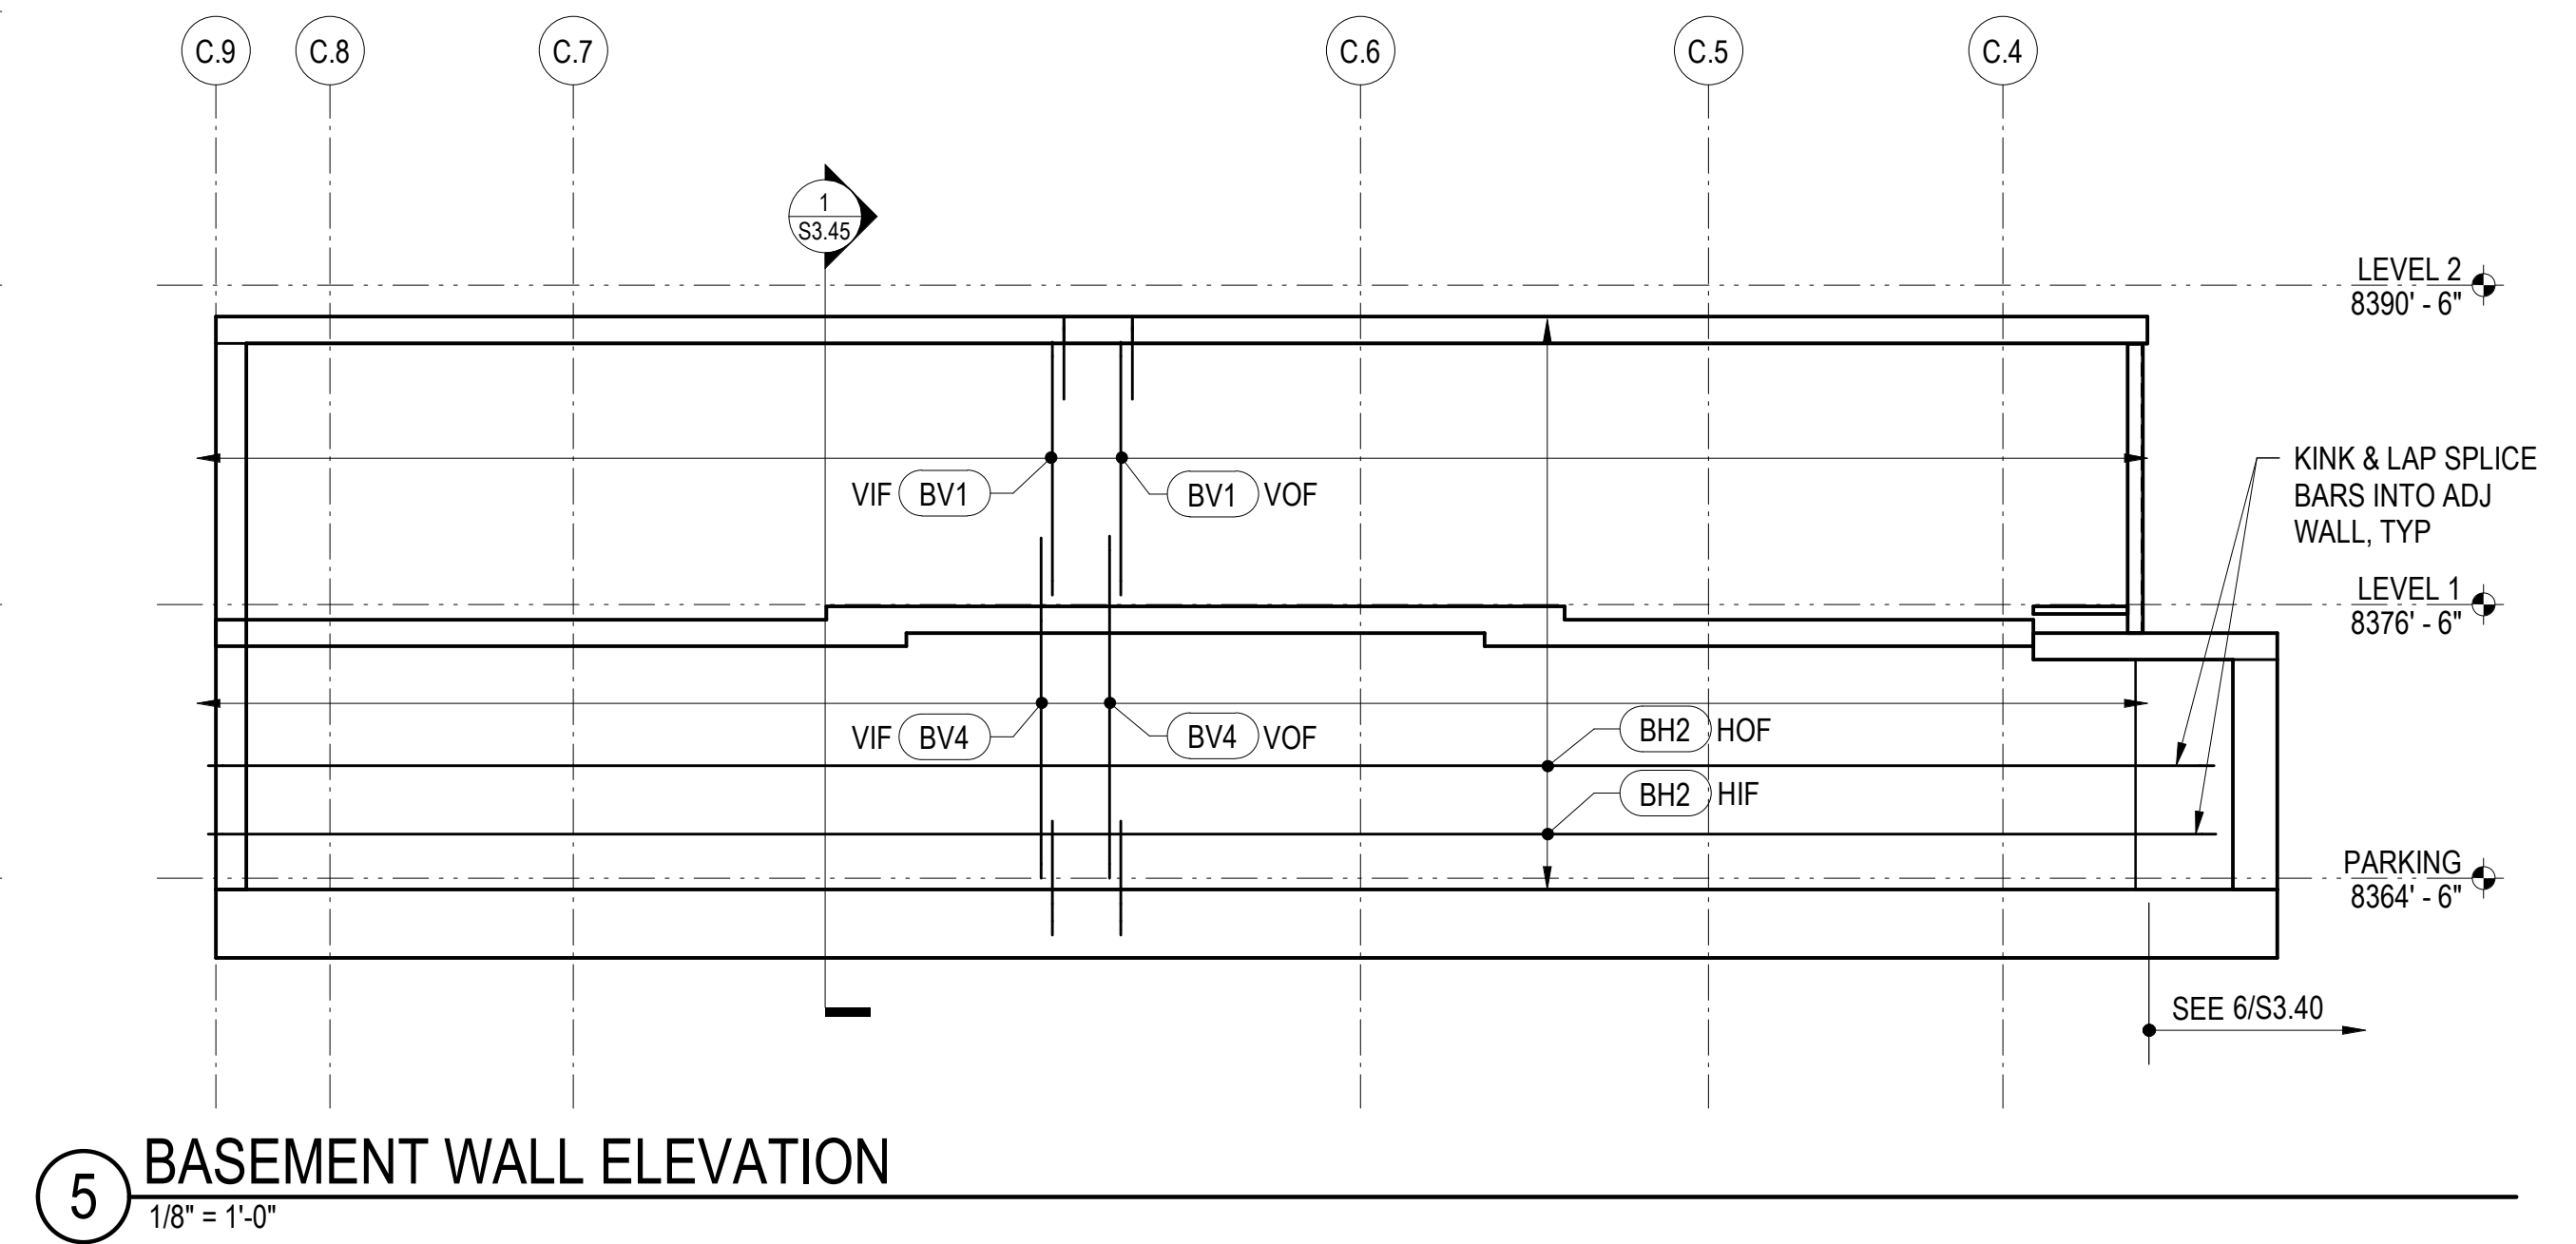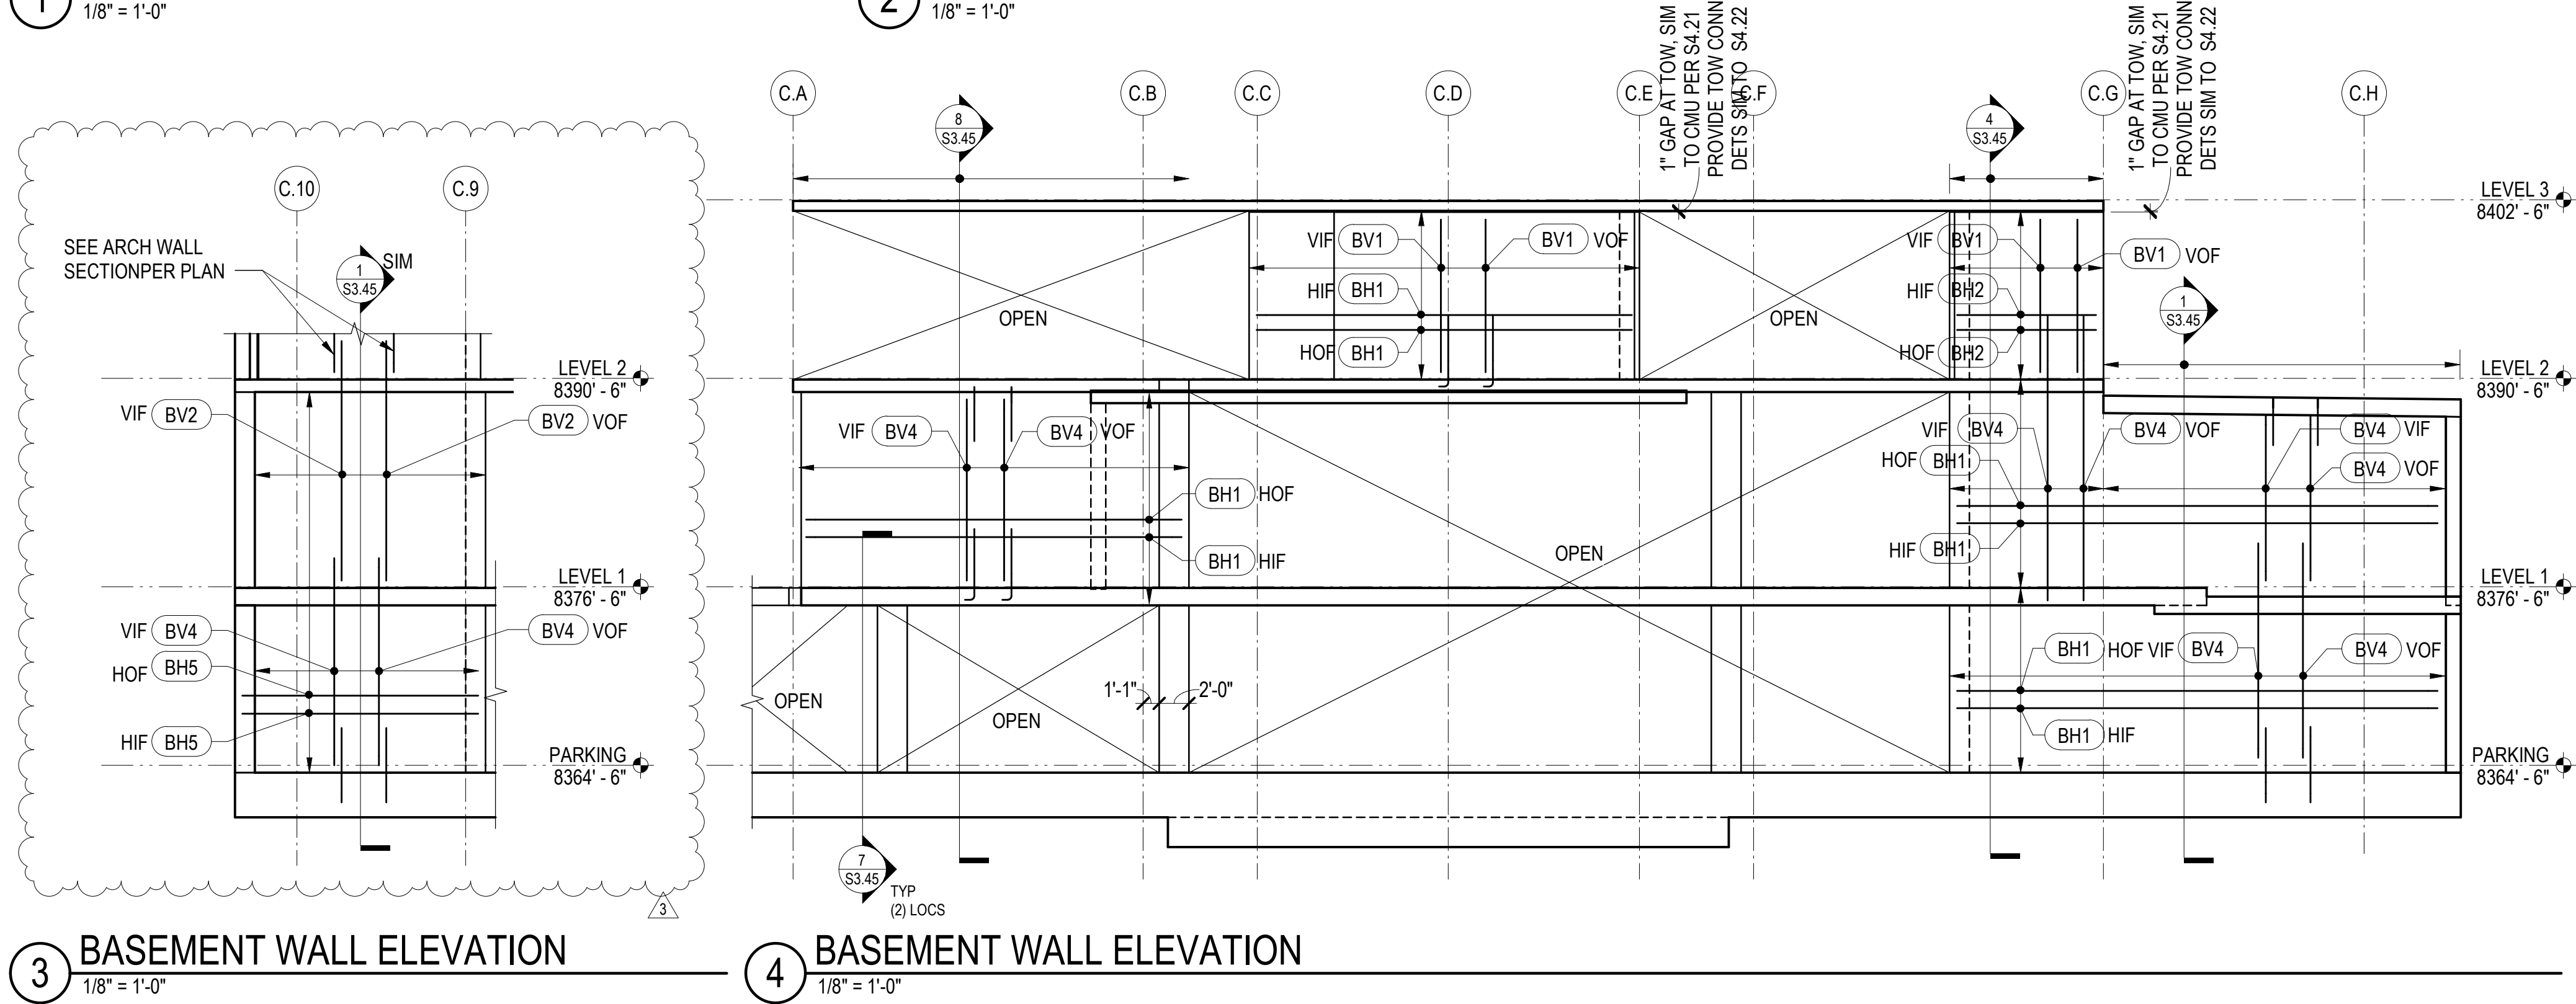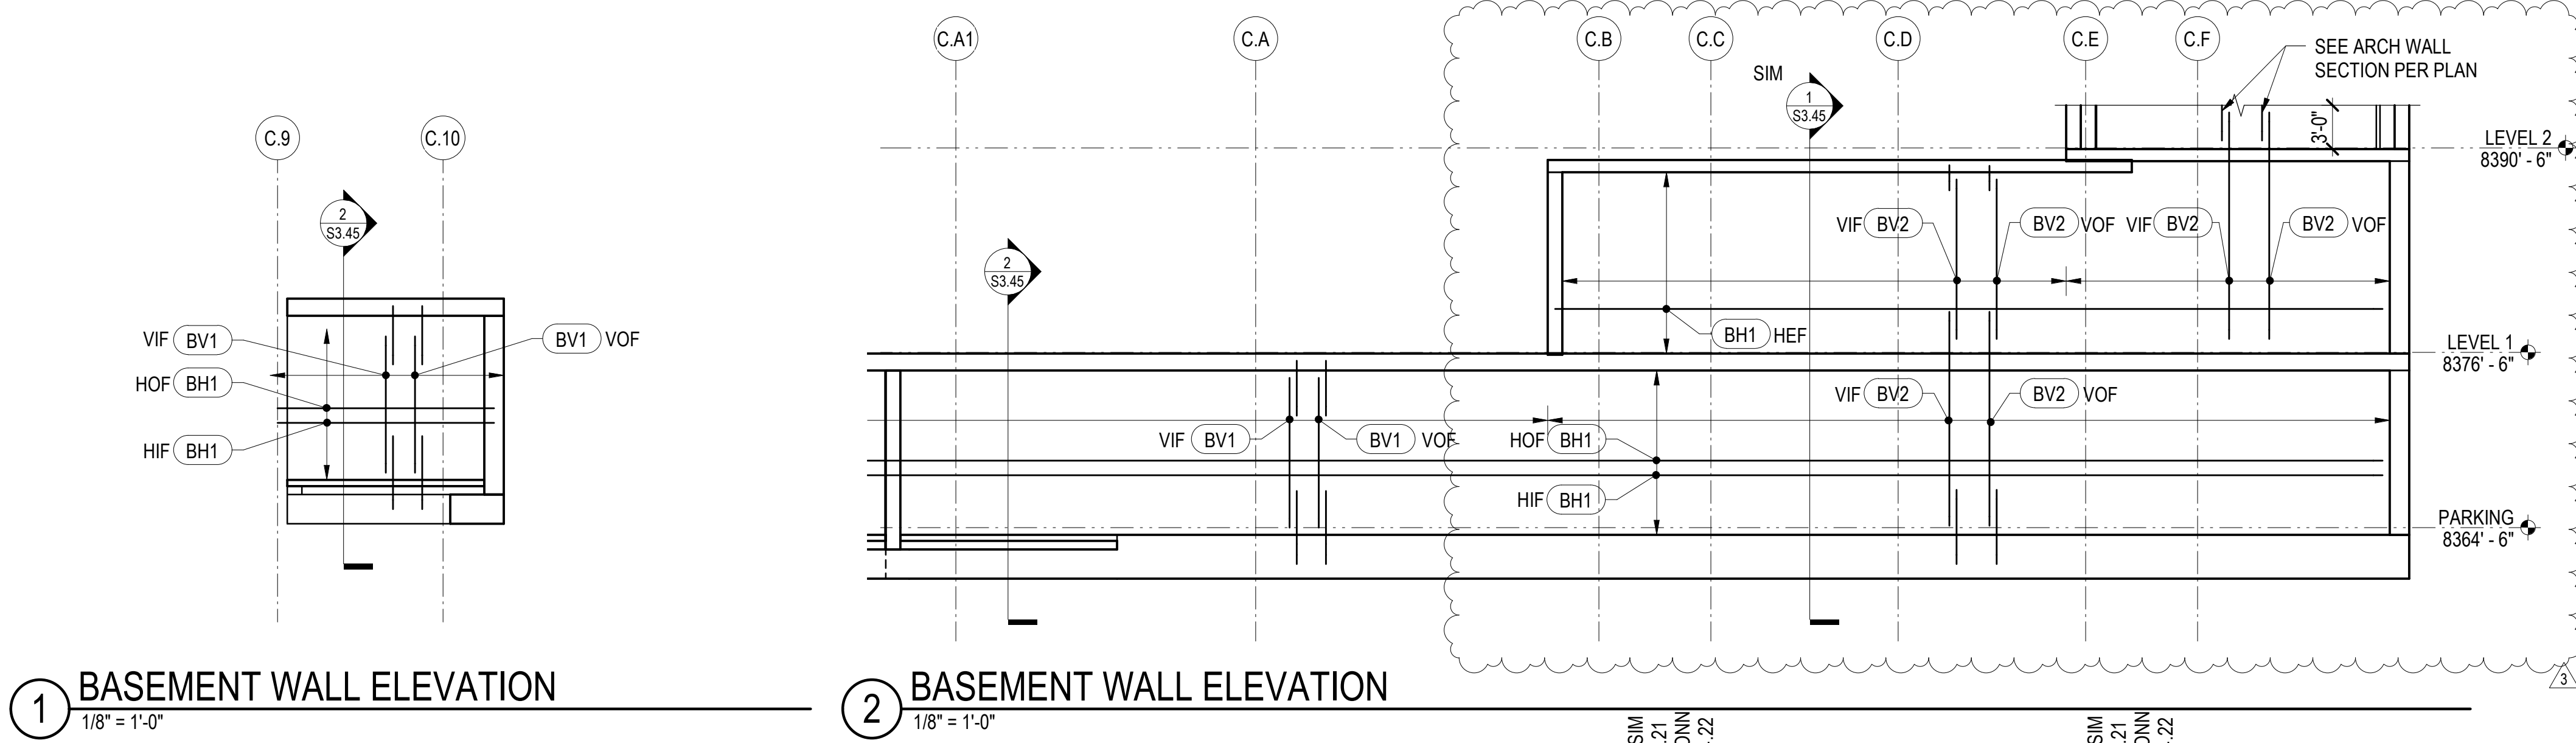

BASEMENT WALL HORIZONTAL REINFORCEMENT		
MARK	REINFORCING	REMARKS
BH1	#5 @ 12"	
BH2	#4 @ 12"	
BH5	#7 @ 6"	

BASEMENT WALL VERTICAL REINFORCEMENT		
MARK	REINFORCING	REMARKS
BV1	#6 @ 12"	
BV2	#7 @ 12"	
BV4	#7 @ 6"	

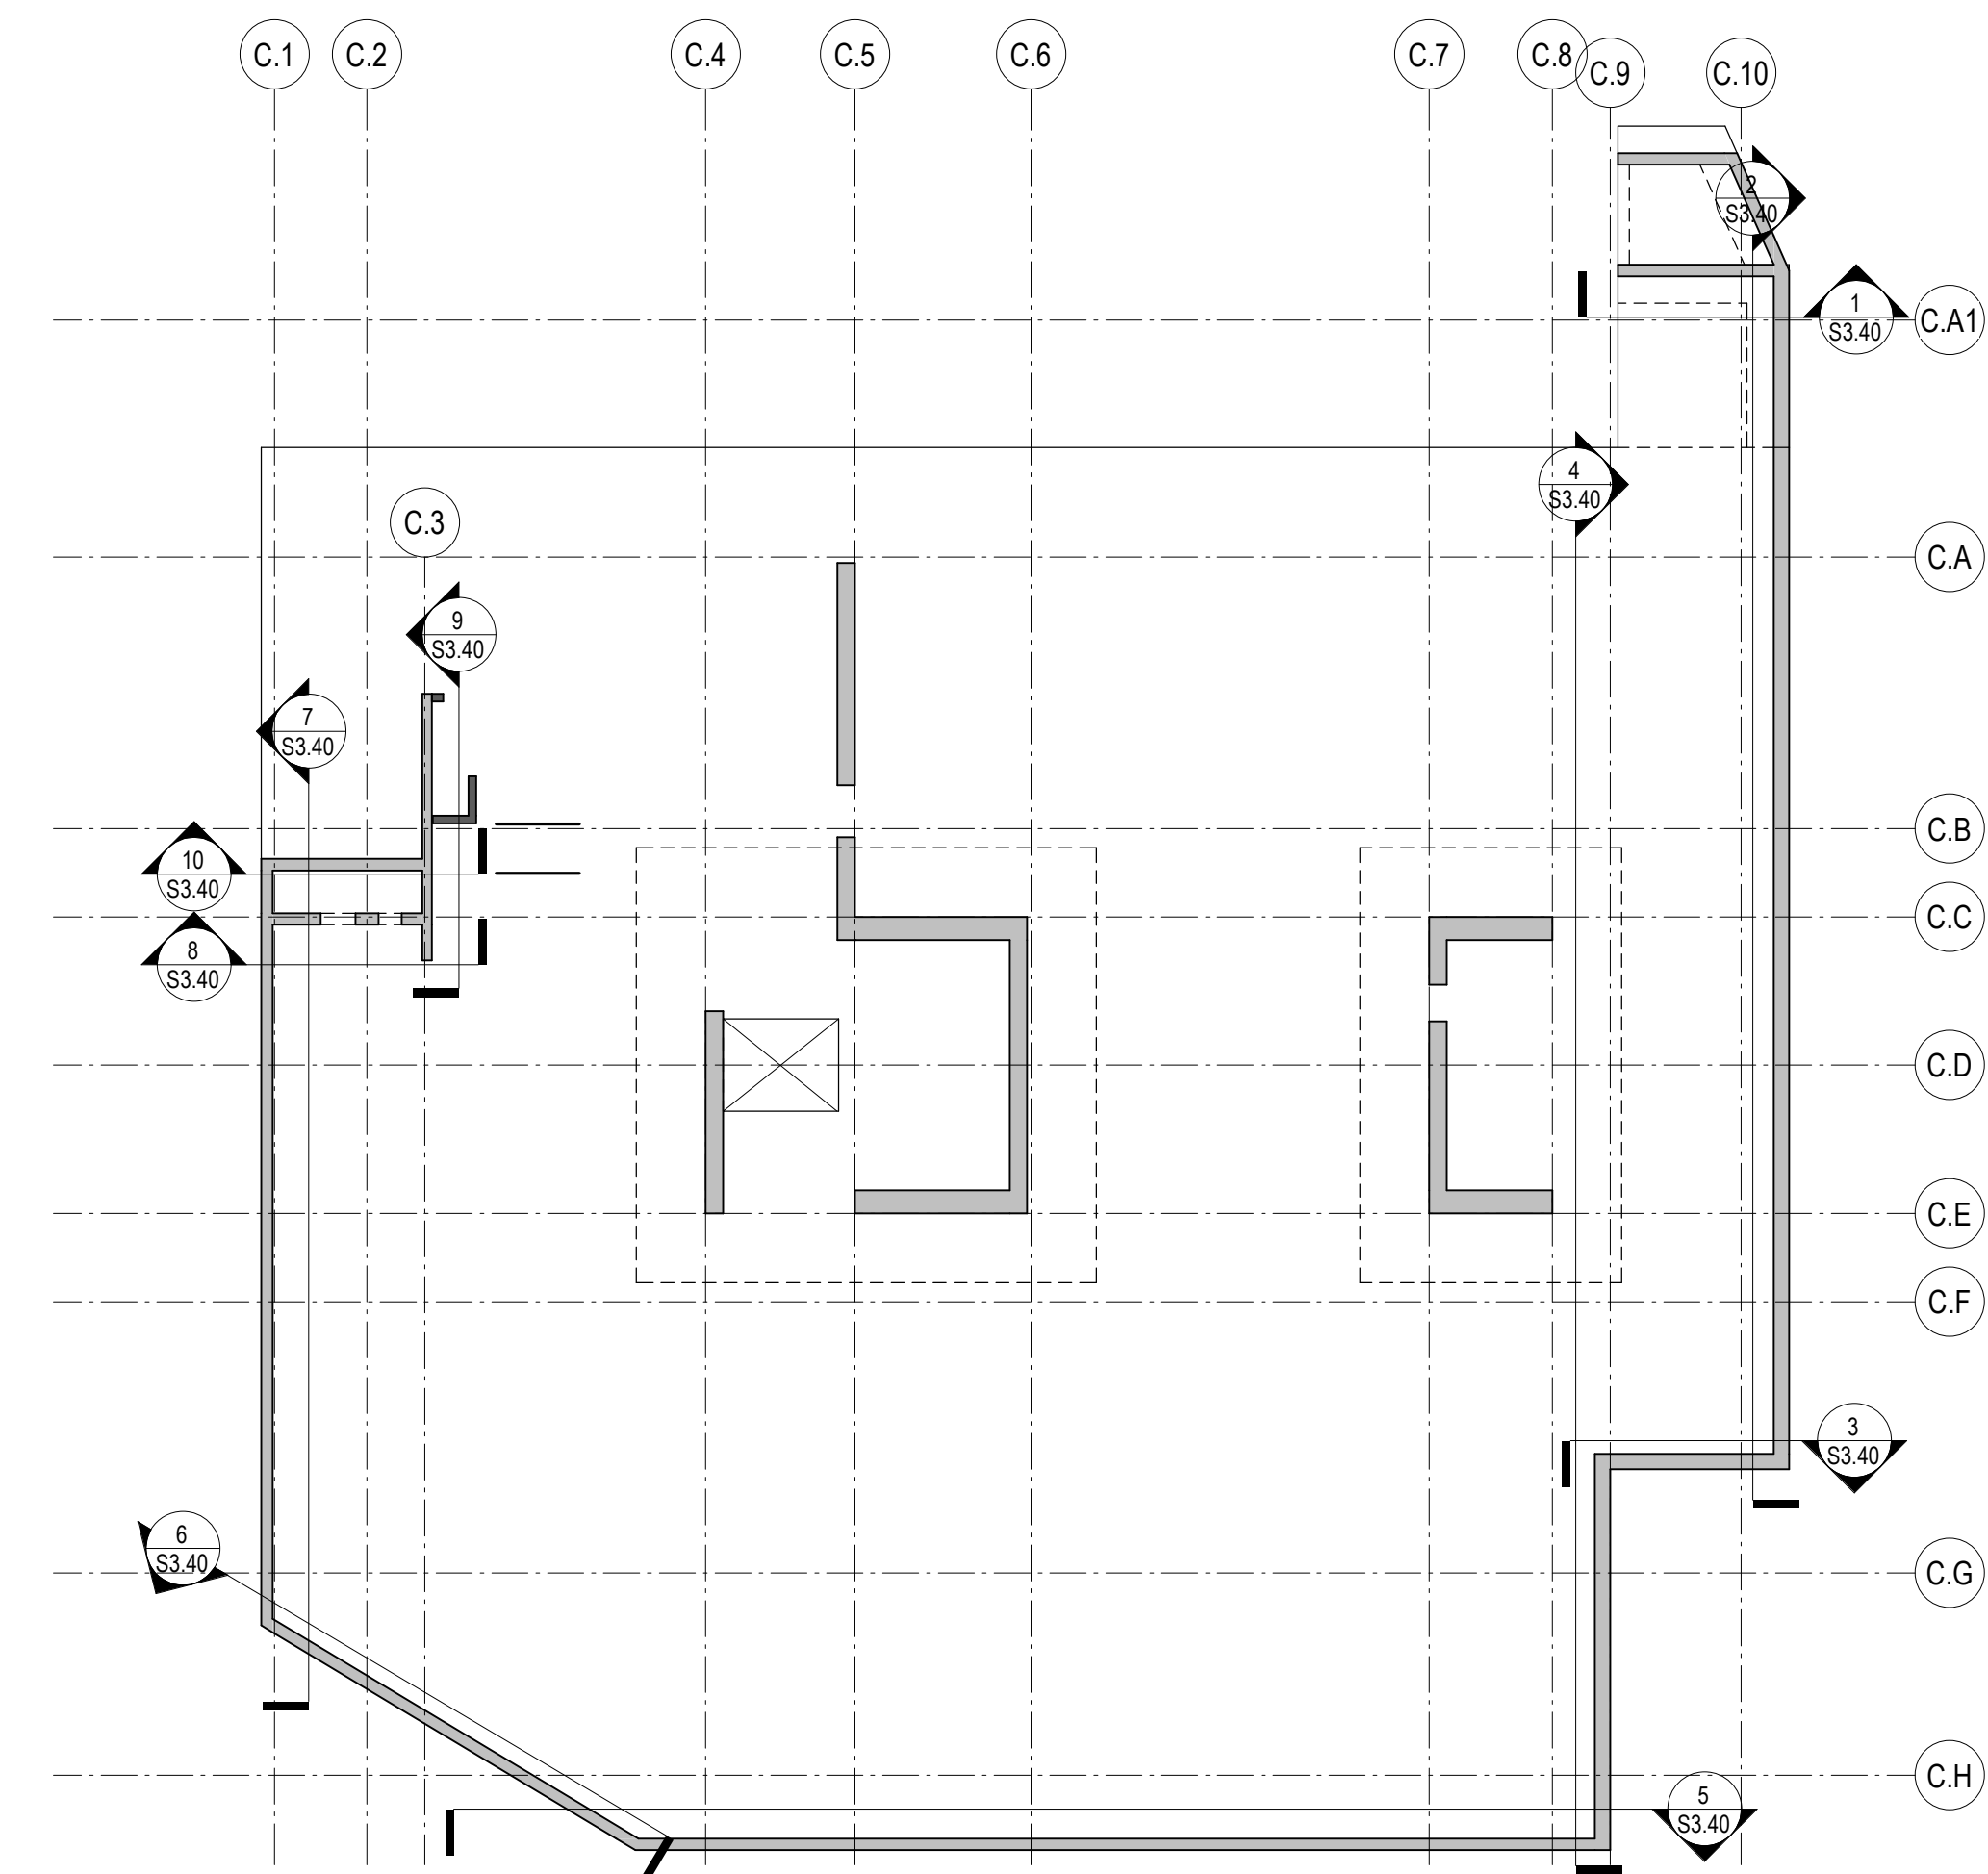

principal architect \_\_\_\_\_  
project manager \_\_\_\_\_  
drawn by \_\_\_\_\_  
checked by \_\_\_\_\_  
job no. 20052  
date 05/17/2024  
revisions:  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
3 8/19/2024 ASI/004  
04/08/2024 IFC SET 1 OF 3  
11/18/2022 95% CD  
no. date by

IFC SET 2 OF 3  
05/17/2024


TOWER C  
BASEMENT WALL  
ELEVATIONS

S3.40








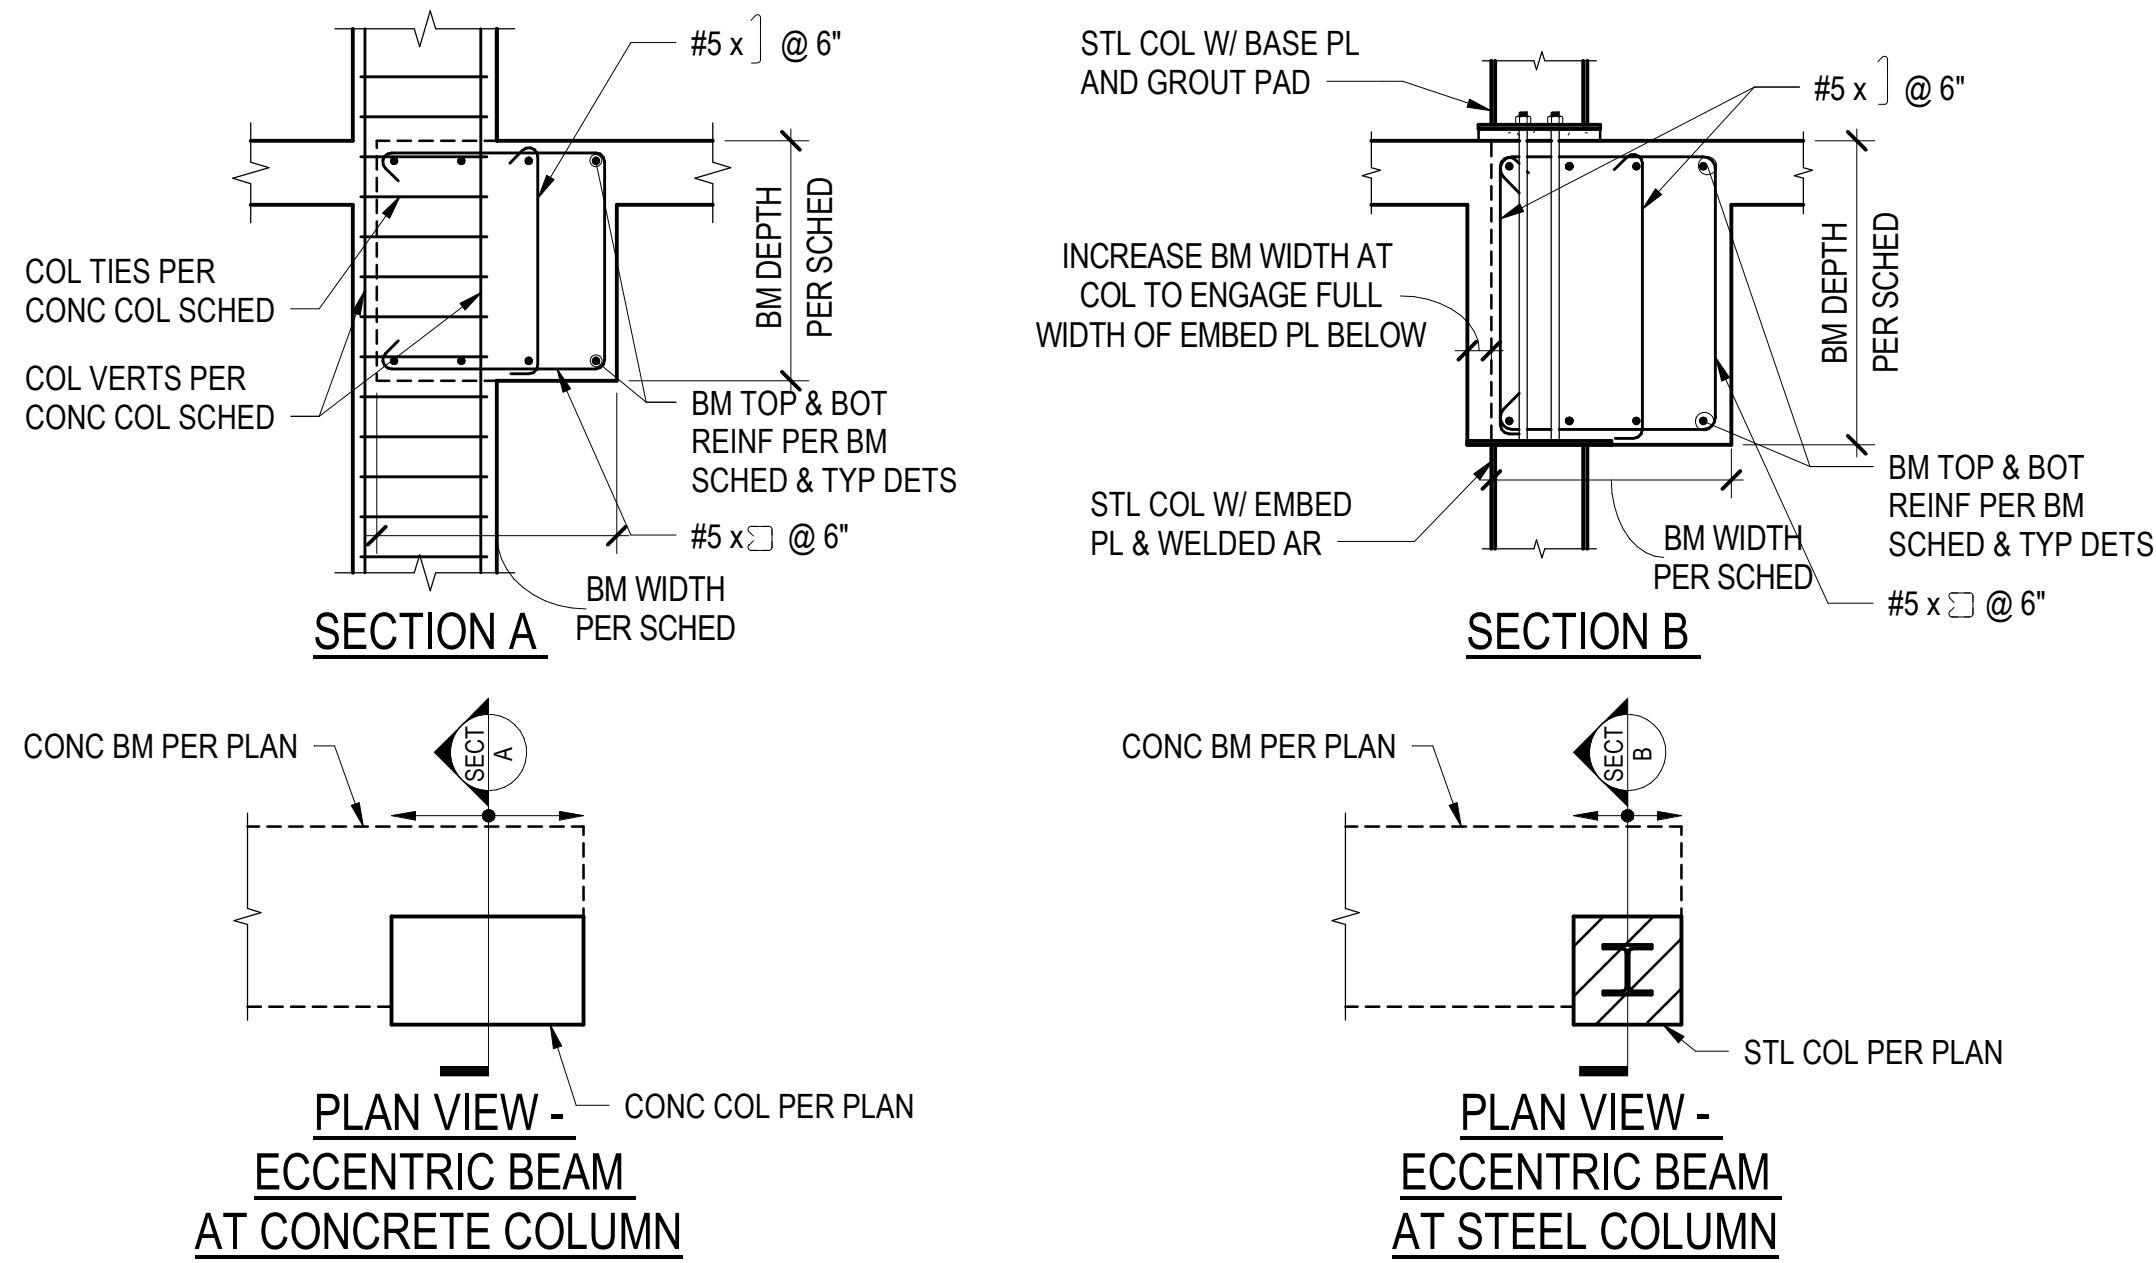

1 ECCENTRIC BEAM AT COLUMN

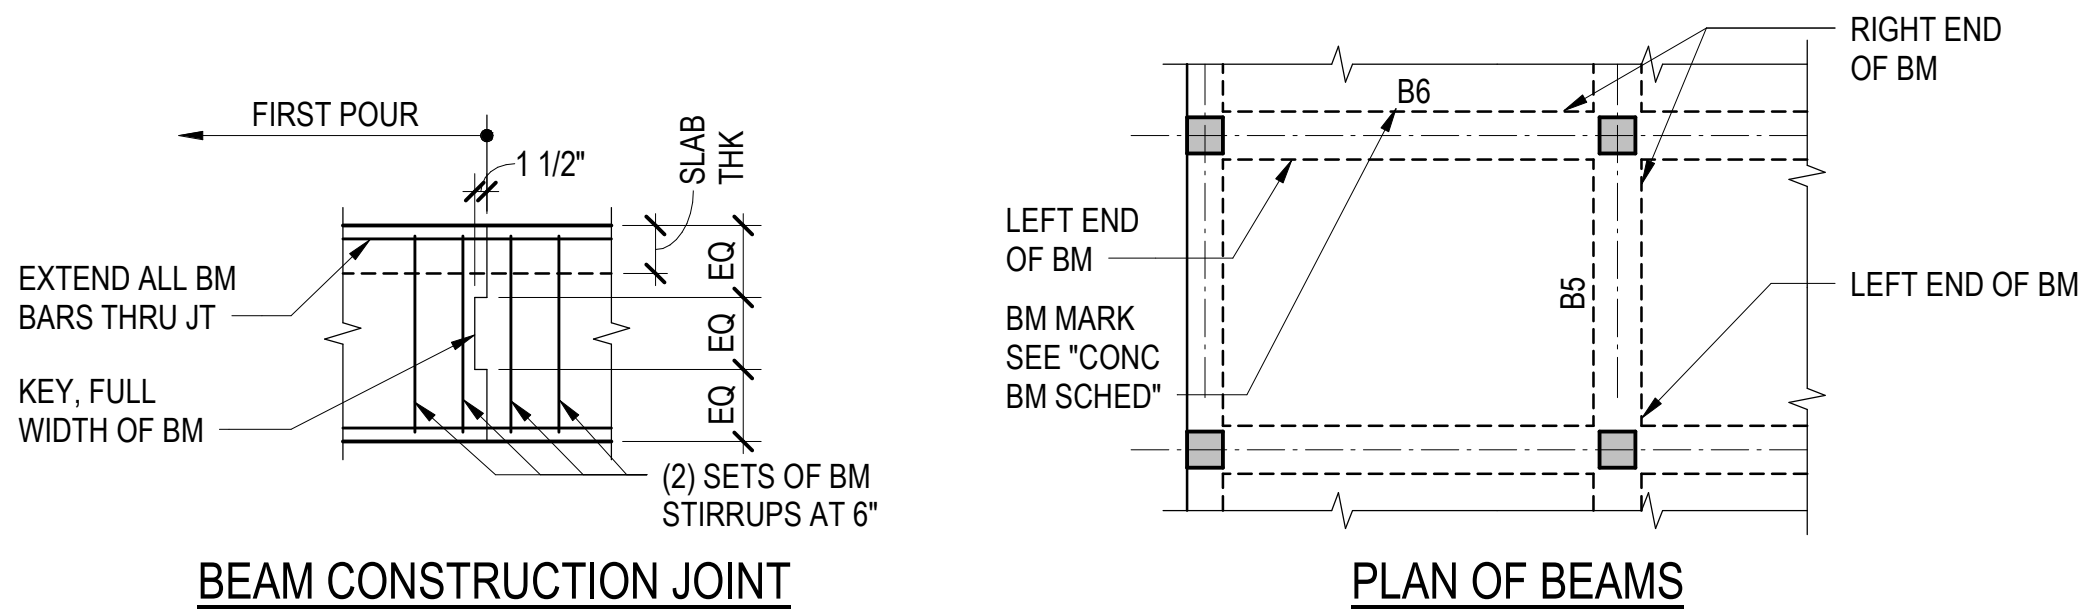

NOTES:

- AT CONTRACTOR'S OPTION, WHERE REQUIRED TO RELIEVE BAR CONGESTION, NOT MORE THAN 50 PERCENT OF THE AREA OF THE STRAIGHT BOTTOM BARS MAY BE TERMINATED AS SHOWN UNLESS NOTED OTHERWISE.
- BEAM SCHEDULES DO NOT INDICATE REQUIREMENTS FOR ARRANGING BARS. THE CONTRACTOR SHALL DETAIL AND PLACE REINFORCING STEEL IN A SINGLE LAYER WHENEVER POSSIBLE. A SECOND LAYER MAY BE USED ONLY WHERE REQUIRED TO PROVIDE PROPER CLEARANCES BETWEEN BARS IN A LAYER AND WHERE REQUIRED IN ORDER TO PROPERLY CLEAR COLUMN VERTICALS AND SIMILAR REINFORCING.
- EITHER 90 OR 180 DEGREE STANDARD HOOK BARS MAY BE USED FOR LONGITUDINAL BARS.
- WHERE TOP BARS ARE INDICATED AS CONTINUOUS AND RUN OVER 60 FEET IN LENGTH, BARS MAY BE LAPPED  $L_d$  IN THE MIDDLE THIRD OF THE BEAM SPAN UNLESS NOTED OTHERWISE. CONTINUOUS TOP BARS SHALL NOT BE LAPPED IN THE SPAN ADJACENT TO A CANTILEVER, UNLESS NOTED OTHERWISE. WHERE BOTTOM BARS ARE SHOWN AS CONTINUOUS AND RUN IN EXCESS OF 60 FEET, A LAP SPlice MAY BE USED EQUAL TO  $L_{sb}$  AND SHALL BE OUTSIDE THE MIDDLE THIRD OF THE BEAM SPAN. SIDE BAR SPLICES MAY BE MADE WHERE CONVENIENT.
- LOCATE ALL CONSTRUCTION JOINTS WITHIN THE MIDDLE THIRD OF SPAN. JOINTS SHALL BE OFFSET AT A MINIMUM DISTANCE OF TWO TIMES THE WIDTH OF INTERSECTING BEAMS. SUBMIT LOCATION OF ALL CONSTRUCTION JOINTS TO ENGINEER FOR REVIEW AND ACCEPTANCE BEFORE FORMING.
- ALL BARS IN SAME LAYER UNLESS NOTED OTHERWISE.


3 TYPICAL CONCRETE BEAM NOTES

CONCRETE BEAM SCHEDULE										
MARK	SIZE (WIDTHxDEPTH)	CAMBER	BOTTOM BARS	TOP BARS			STIRRUPS		REMARKS	
				LEFT	CONTINUOUS	RIGHT	LEFT	RIGHT		
B1	12"x18"		(2) #7	(2) #7	(2) #7	(2) #7	#4 @ 6" [2C]		SEE 1/S4.03	
B2	24"x24"		(3) #8	(7) #8	(7) #8	(7) #8	#5 @ 9" [2C]		SEE 1/S4.03	
B3	24"x24"		(4) #8	(4) #8	(3) #8	(4) #8	#5 @ 9" [2C]		SEE SECTION PER PLAN FOR DEPTH:SEE 1/S4.03	
B5	24"x22" MIN		(3) #8	(9) #9	(9) #9	(9) #9	#5 @ 9" [2C]		SEE SECTION PER PLAN FOR DEPTH:SEE 1/S4.03	
B6	24"x26 1/2"		(3) #8	(5) #9	(4) #9	(5) #9	#5 @ 9" [2C]		SEE 1/S4.03	
B7	24"x24"		(3) #8	(10) #9	(10) #9	(10) #9	#5 @ 9" [3C]		SEE 1/S4.03	
B8	24"x24"		(8) #10	(5) #10	(5) #10	(5) #10	#6 @ 5" [3C]		ADD (2) #4 SIDE BAR EA SIDE: SEE 1/S4.03	
B9	30"x24"		(4) #7	(7) #9	(7) #9	(7) #9	#5 @ 9" [3C]		ADD (3) #4 SIDE BAR EA SIDE:SEE 1/S4.03	
B10	30"x24"		(4) #7	(7) #9	(7) #9	(7) #9	#5 @ 9" [3C]		ADD (2) #4 SIDE BAR EA SIDE - SEE SECTION PER PLAN FOR DEPTH; SEE 1/S4.03	
B12	30"x22" MIN		(4) #7	(9) #10	(9) #10	(9) #10	#5 @ 9" [3C]		ADD (2) #4 SIDE BAR EA SIDE - SEE SECTION PER PLAN FOR DEPTH; SEE 1/S4.03	
B13	30"x26 1/2"		(5) #7	(10) #10	(10) #10	(10) #10	#5 @ 9" [3C]		ADD (2) #4 SIDE BAR EA SIDE - SEE SECTION PER PLAN FOR DEPTH; SEE 1/S4.03	
B16	30"x24"		(4) #7	(6) #8	(6) #8	(6) #8	#5 @ 6" [3C]		ADD (3) #5 SIDE BAR EA SIDE: SEE 1/S4.03	
B17	30"x24"		(4) #7	(9) #8	(9) #8	(9) #8	#4 @ 9" [4C]		ADD (3) #4 SIDE BAR EA SIDE: SEE 1/S4.03	
B21	30"x22" MIN		(4) #7	(10) #10	(10) #10	(10) #10	#6 @ 6" [3C]		ADD (2) #4 SIDE BAR EA SIDE - SEE SECTION PER PLAN FOR DEPTH; SEE 1/S4.03	
B22	30"x26 1/2"		(6) #8	(10) #10	(10) #10	(10) #10	#6 @ 6" [3C]		ADD (2) #4 SIDE BAR EA SIDE - SEE SECTION PER PLAN FOR DEPTH; SEE 1/S4.03	
B23	30"x26 1/2"		(4) #7	(8) #9	(8) #9	(8) #9	#5 @ 8" [3C]		ADD (2) #4 SIDE BAR EA SIDE - SEE SECTION PER PLAN FOR DEPTH; SEE 1/S4.03	
B26	30"x30"		(3) #7	(4) #7	(4) #7	(4) #7	#5 @ 9" [3C]		SEE 1/S4.03	
B27	30"x30"		(3) #7	(4) #7	(4) #7	(4) #7	#6 @ 6" [2C]		SEE 1/S4.03	
B28	18"x24"		(3) #7	(3) #7	(3) #7	(3) #7	#5 @ 5" [2C]			
B29	30"x24"		(4) #7	(6) #8	(6) #8	(6) #8	#5 @ 9" [2C]		SEE 1/S4.03	
B30	30"x24"		(4) #7	(9) #8	(9) #8	(9) #8	#5 @ 10" [2C]		SEE 1/S4.03	
B33	24"x32"		(4) #8	(3) #7	(3) #7	(3) #7	#5 @ 14" [2C]			
B34	24"x24"		(4) #8	(4) #8	(4) #8	(4) #8	#5 @ 10" [2C]		SEE 1/S4.03	
B35	24"x24"		(5) #8	(5) #8	(5) #8	(5) #8	#5 @ 10" [2C]		SEE 1/S4.03	
B37	18"x32"		(3) #7	(3) #7	(3) #7	(3) #7	#5 @ 5" [2C]			
B38	24"x32"		(4) #7	(4) #8	(4) #8	(4) #8	#5 @ 14" [2C]			
B39	24"x32"		(4) #8	(4) #8	(4) #8	(4) #8	#5 @ 9" [3C]			
B40	24"x32"		(6) #9	(4) #8	(4) #8	(4) #8	#5 @ 9" [3C]			
B41	34"x30"		(6) #8	(6) #8	(6) #8	(6) #8	#5 @ 9" [3C]			
B42	32"x32"		(4) #9	(4) #9	(4) #9	(4) #9	#4 @ 14" [4C]			
B44	24"x48"		(3) #7	(3) #7	(3) #7	(3) #7	#4 @ 14" [3C]			
B45	24"x48"		(3) #8	(3) #8	(3) #8	(3) #8	#4 @ 14" [3C]			
B46	24"x32"		(3) #8	(3) #8	(3) #8	(3) #8	#4 @ 14" [3C]			
B47	24"x32"		(3) #9	(5) #9	(5) #9	(5) #9	#4 @ 14" [3C]			
B48	24"x50"		(3) #9	(3) #9	(3) #9	(3) #9	#4 @ 14" [3C]			
B49	24"x32"		(3) #9	(3) #9	(3) #9	(3) #9	#4 @ 14" [3C]			
B50	12"x39"		(3) #7	(3) #7	(3) #7	(3) #7	#4 @ 14" [3C]			
B51	18"x32"		(4) #8	(4) #8	(4) #8	(4) #8	#4 @ 10 [4C]			
B52	32"x72"		(14) #11	(4) #10	(3) #10	(3) #10	#5 @ 6" [4C]			
B53	18"x36"		(4) #8	(2) #8	(3) #8	(2) #8	#5 @ 12" [2C]			
B54	24"x32"		(3) #7	(3) #7	(3) #7	(3) #7	#4 @ 14" [3C]			
B56	18"x38"		(3) #9	(3) #9	(3) #9	(3) #9	#4 @ 14" [3C]			
B57	24"x33"		(3) #9	(3) #9	(3) #9	(3) #9	#4 @ 14" [3C]			
B58	30"x36"		(4) #9	(3) #7	(4) #9	(3) #7	(13) #5 @ 6" [4C]	(13) #5 @ 6" [3C]		
B59	24"x62"		(4) #9	(4) #9	(4) #9	(4) #9	#4 @ 12" [4C]			
B61	24"x39"		(6) #10	(6) #8	(6) #8	(6) #8	#4 @ 14" [4C]			
B62	24"x74"		(3) #8	(3) #8	(3) #8	(3) #8	#4 @ 14" [3C]			
B63	24"x72"		(5) #11	(5) #11	(5) #11	(5) #11	#4 @ 14" [3C]			
B64	32"x72"		(8) #11	(8) #11	(8) #11	(8) #11	#5 @ 8" [4C]			
B65	24"x60"		(6) #11	(6) #9	(6) #9	(6) #9	#5 @ 14" [4C]			
B66	24"x74"		(5) #11	(5) #11	(5) #11	(5) #11	#4 @ 14" [3C]			
B67	24"x26"		(3) #8	(3) #8	(3) #8	(3) #8	#4 @ 14" [3C]			
B68	24"x61"		(4) #9	(4) #9	(4) #9	(4) #9	#4 @ 14" [4C]			
B69	30 1/2"x48"		(4) #11	(4) #11	(4) #11	(4) #11	#4 @ 14" [4C]			
B71	40"x42"		(11) #18	(6) #11	(6) #11	(6) #11	#6 @ 4" [4C]			
B72	60"x42"		(14) #11	(8) #9	(8) #9	(8) #9	#5 @ 6" [7C]			
B73	38 1/2"x24"		(3) #7	(3) #8	(3) #8	(3) #8	#5 @ 6" [2C]		SEE DETAIL 18/S5.05	
B74	24"x67"		(5) #9	(5) #9	(5) #9	(5) #9	#5 @ 9" [3C]			
B75	36"x30"		(5) #8	(6) #10	(6) #10	(6) #10	#6 @ 6" [5C]		SEE 1/S4.03	
B76	24"x29" MIN		(4) #9	(4) #8	(4) #8	(4) #8	#5 @ 9" [3C]		25" MINIMUM DEPTH; BOTTOM OF BEAM FLAT AT ELEVATION 8373'-9"; TOP OF BEAM STEPS WITH SLAB	
B77	72"x18"		(6) #6	(2) #6	(2) #6	(2) #6	#5 @ 18" [2]		REINF SIM TO 18/S4.05. SEE PLAN FOR ADDED TOP BAR AT END	
B78	32"x20"		(4) #9	(5) #9	(5) #9	(5) #9	#5 @ 6" [3C]			
B79	12" MIN x 33"		(3) #9	(3) #9	(3) #9	(3) #9	#5 @ 6" [2C]		CLOSED STIRRUPS ARE TO BE CONTINUOUS, NO CAP/TIE PER [2C ALT] ALLOWED. SEE DETAIL 08/S5.02	

NOTES:


- SEE "TYPICAL CONCRETE BEAM" DETAIL.
- [ ] DENOTES TYPE OF REINFORCING CONFIGURATION. SEE "TYPICAL CONCRETE BEAM SECTION AND STIRRUPS" DETAIL FOR STIRRUP TYPE.

13 CONCRETE BEAM SCHEDULE

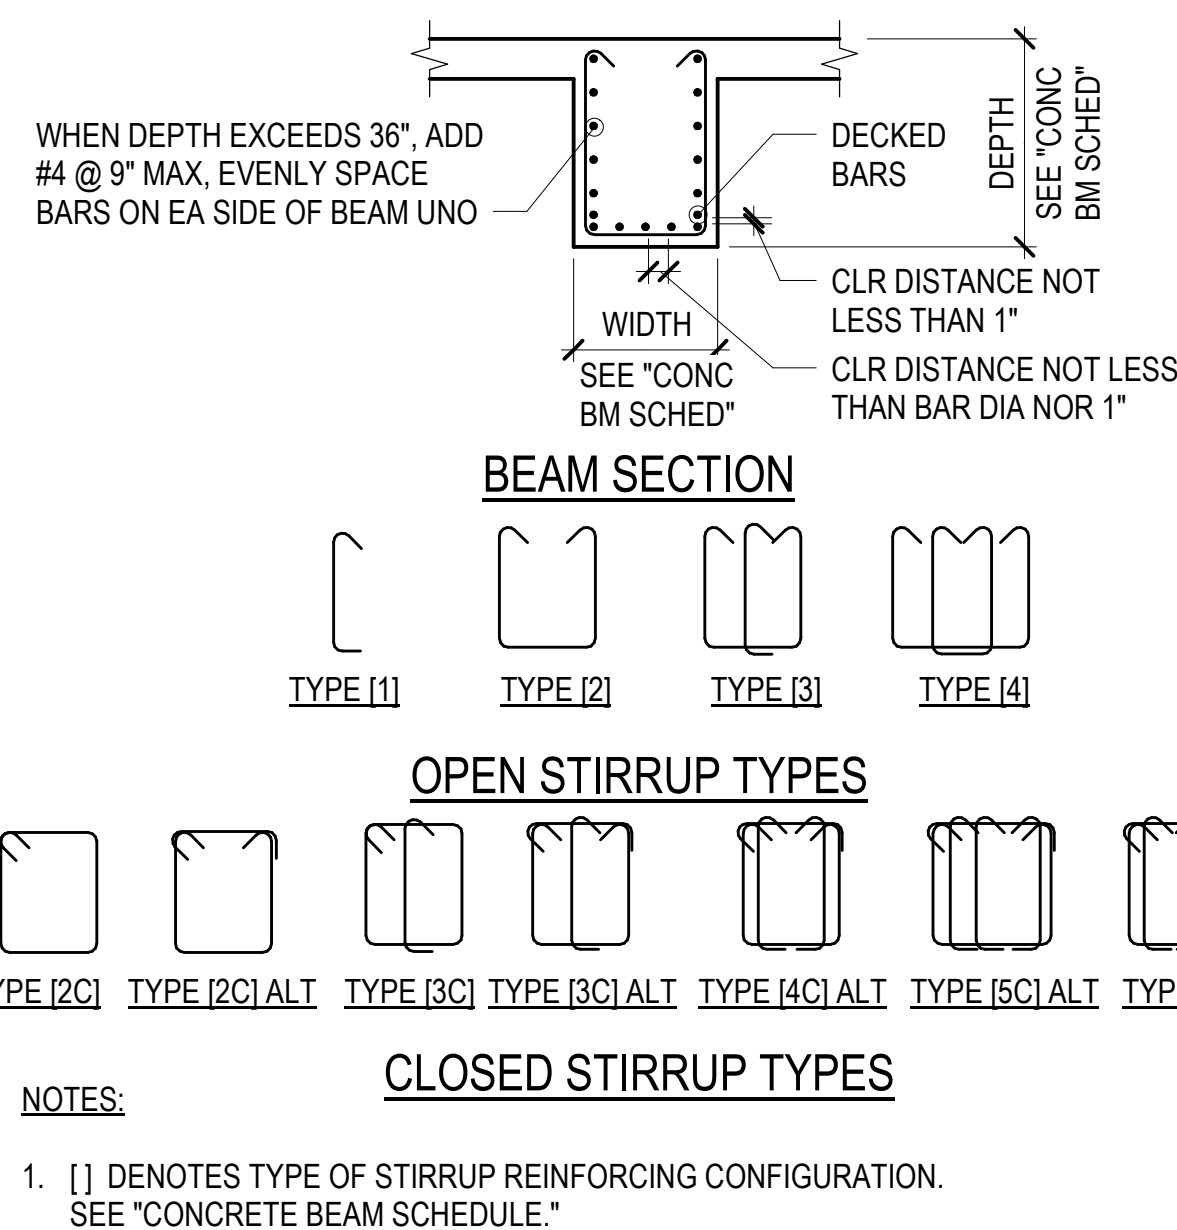


19 TYP CONC BEAM SECTION AND STIRRUPS

11 TYPICAL CONCRETE BEAM

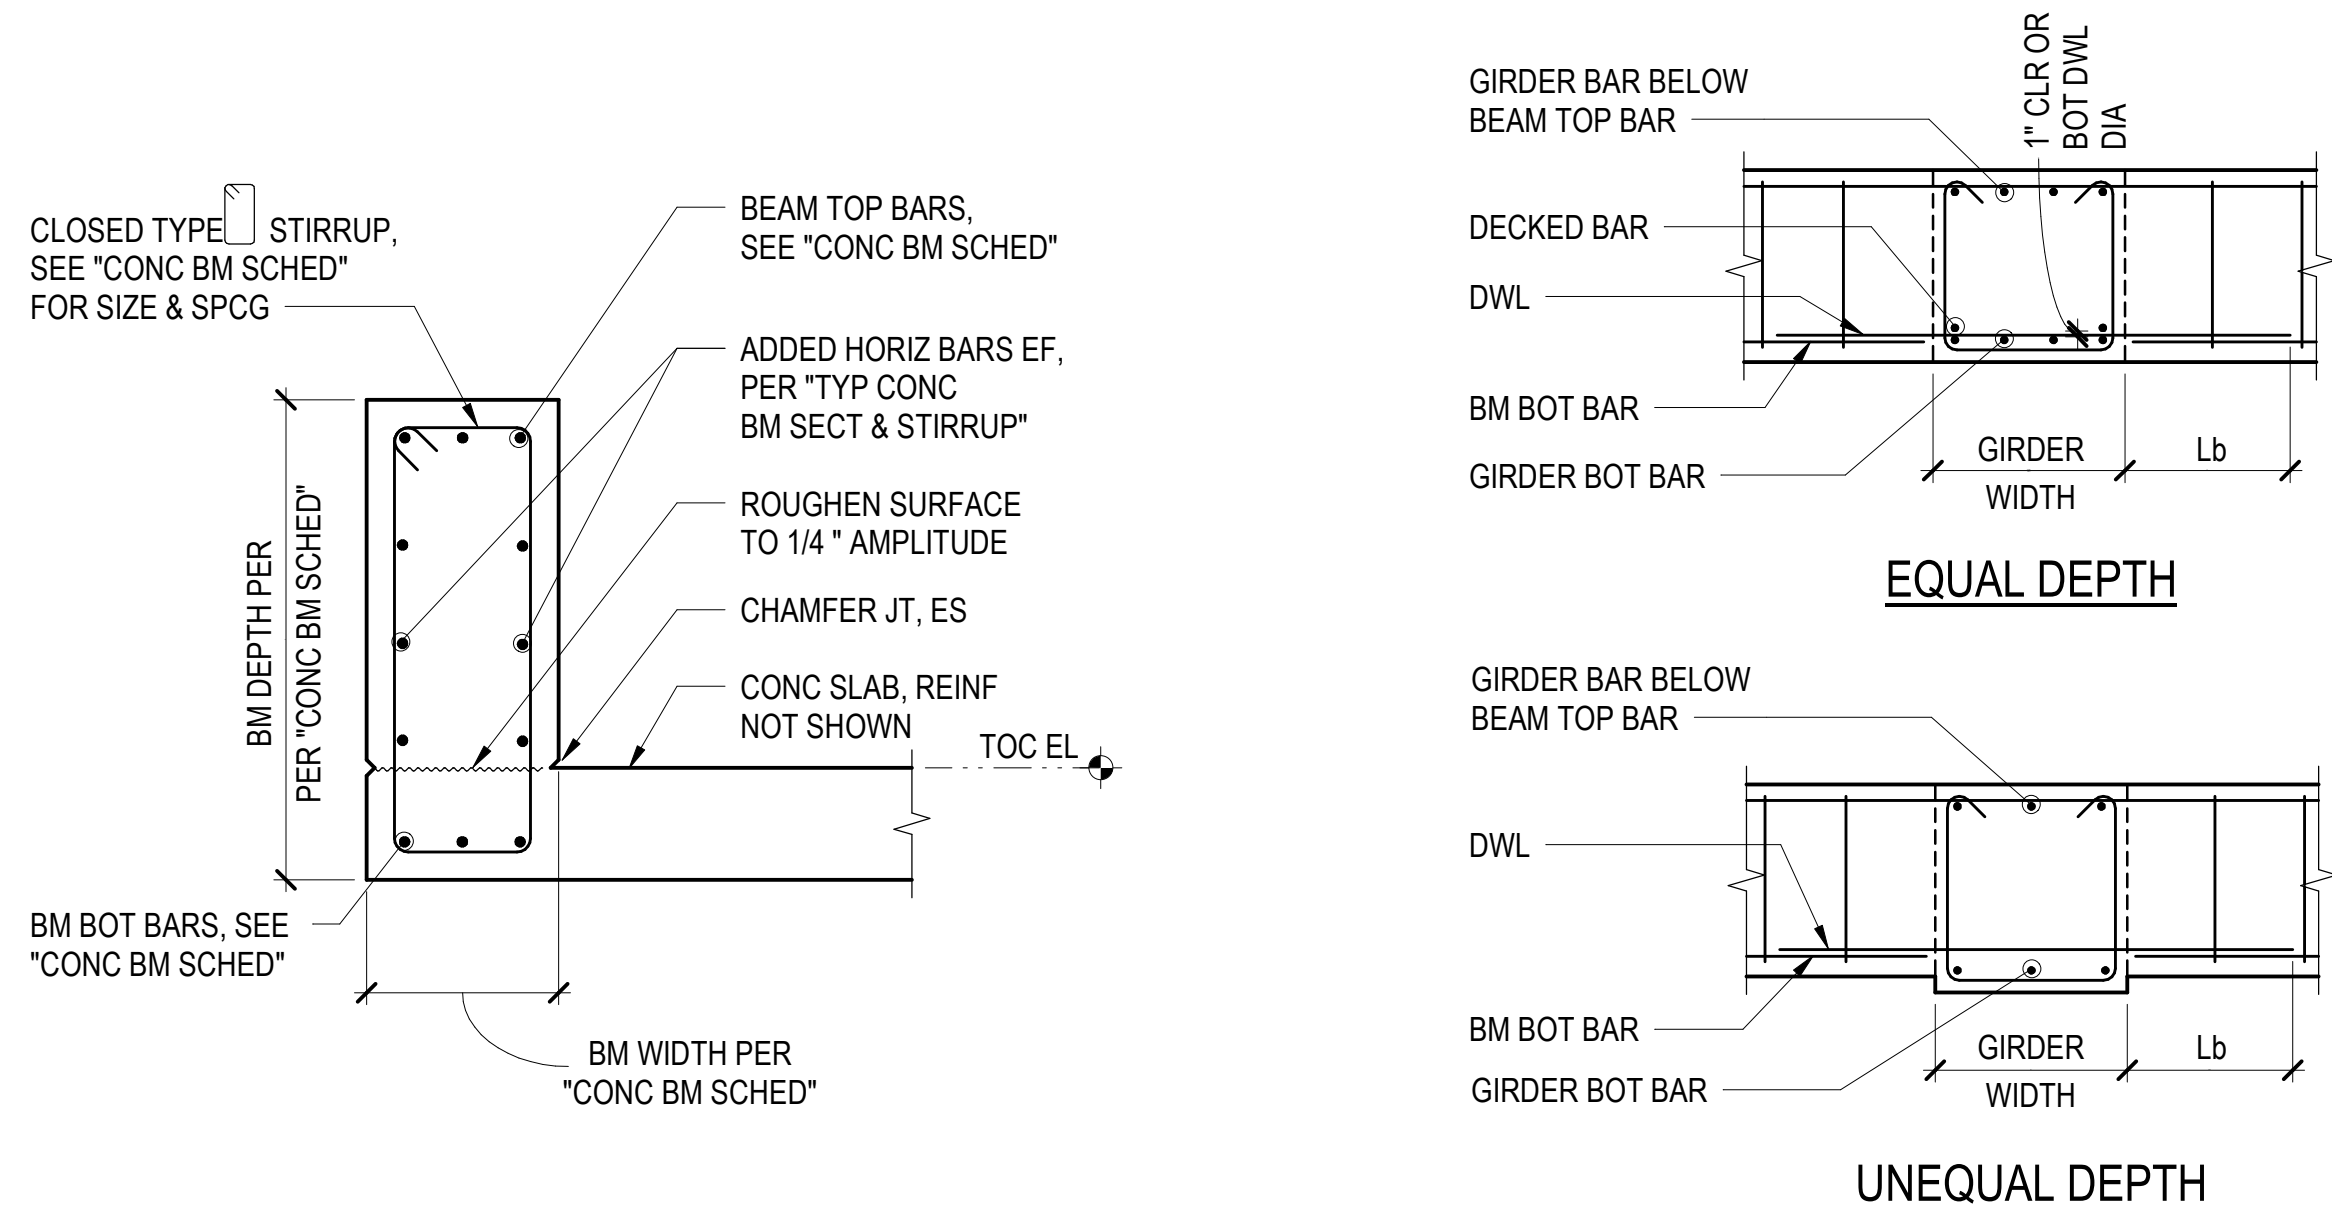


16 TYPICAL CONCRETE UPTURNED BEAM

17 TYP CONC BM AND GIRDER INTERSECTION

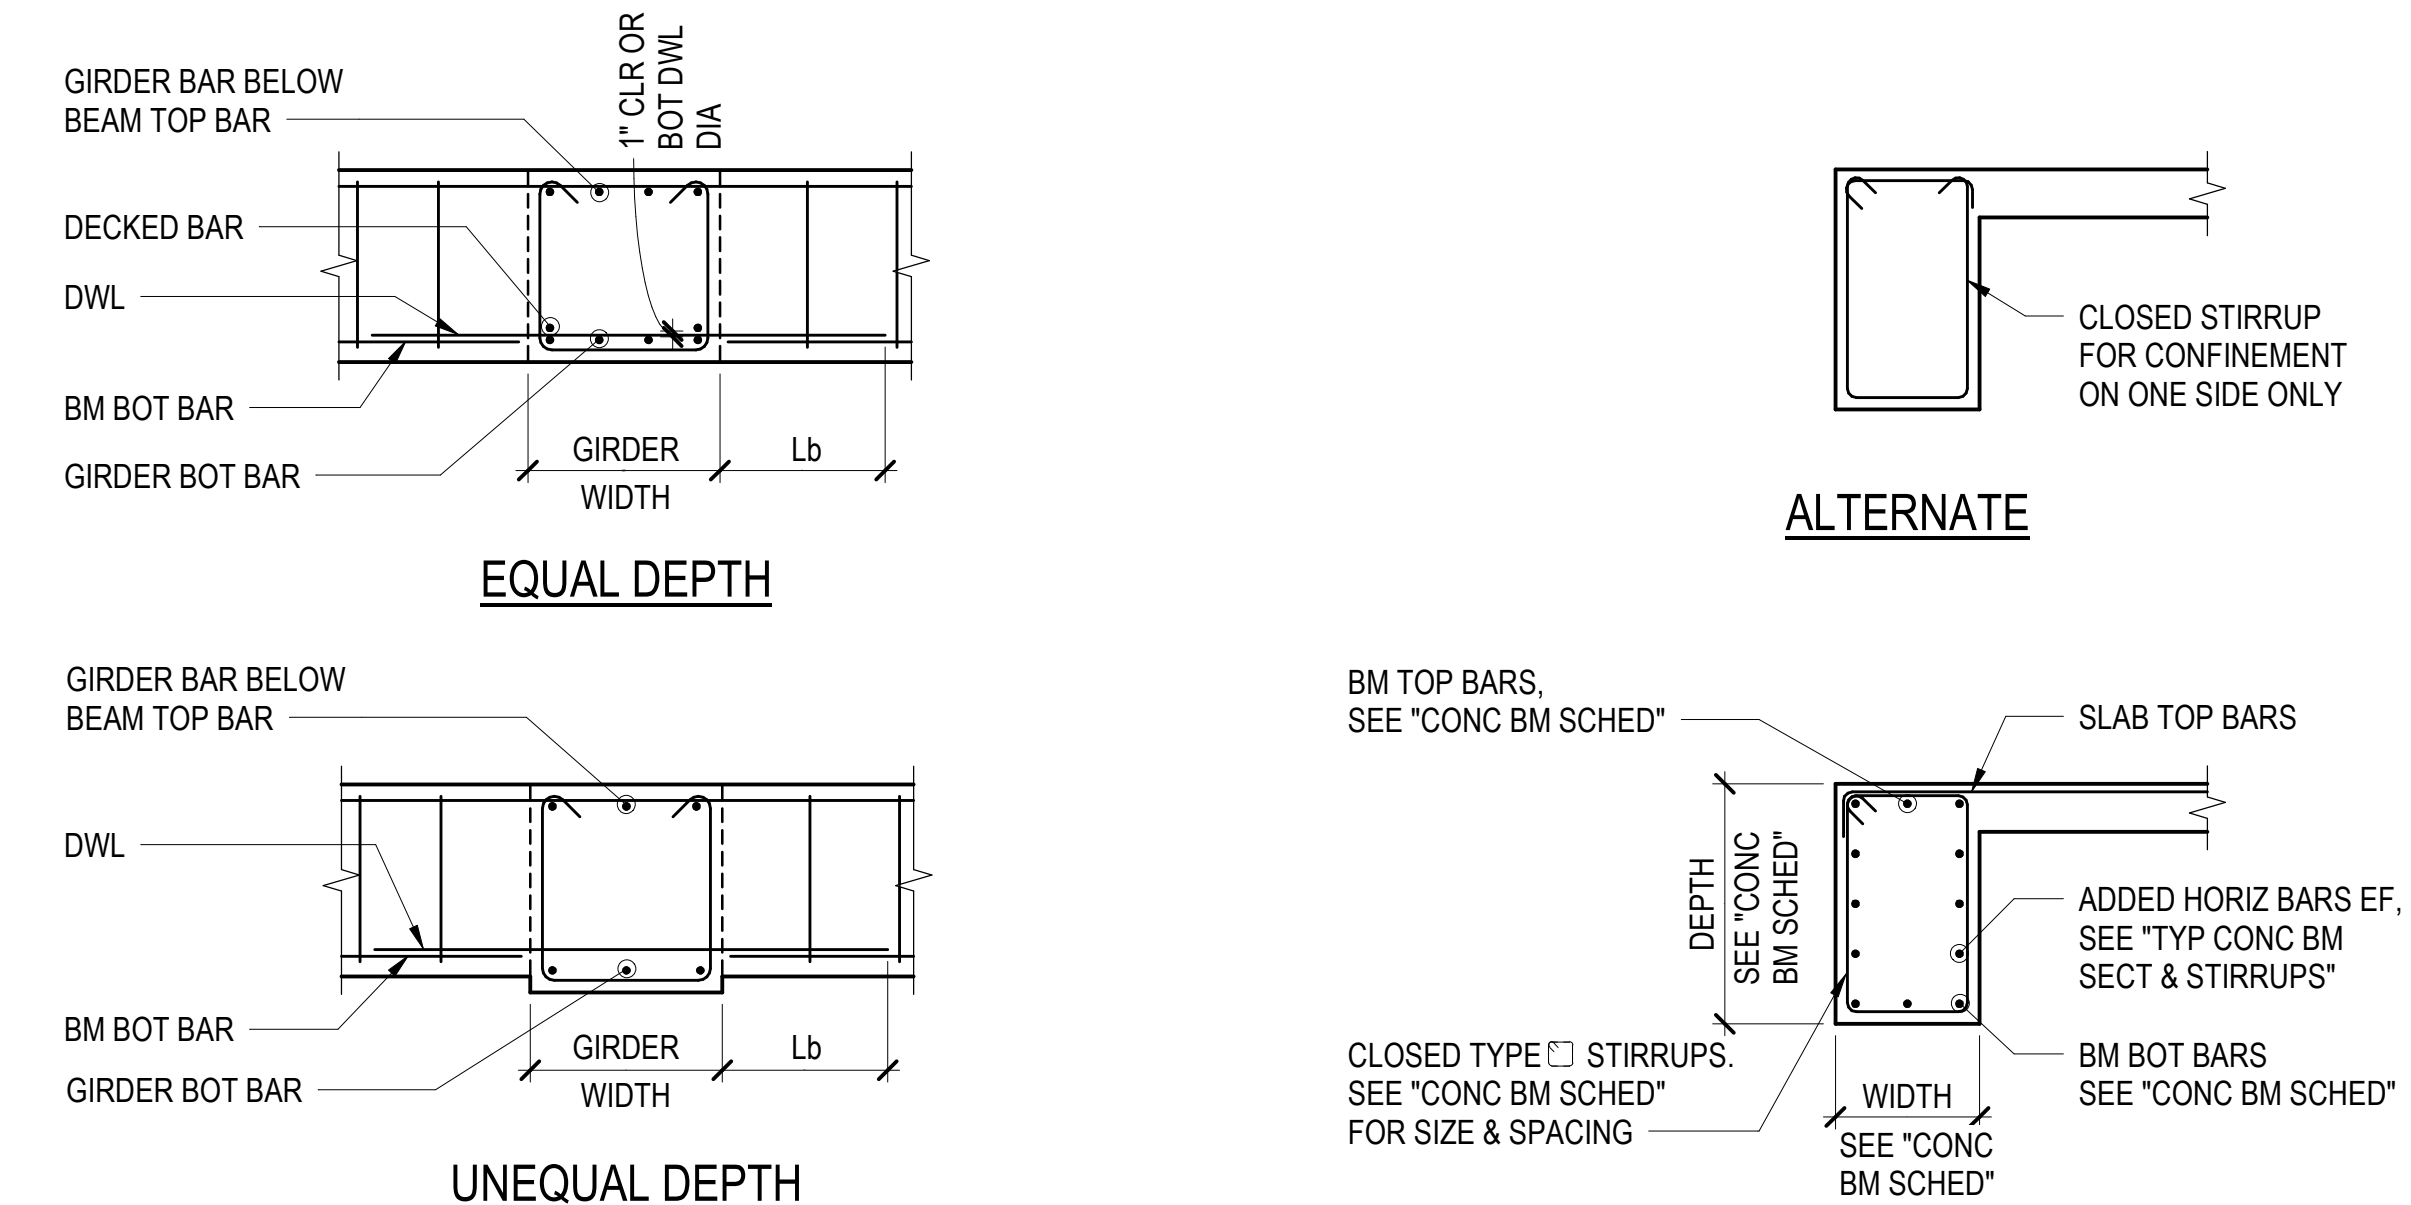


18 TYPICAL CONCRETE EDGE BEAM



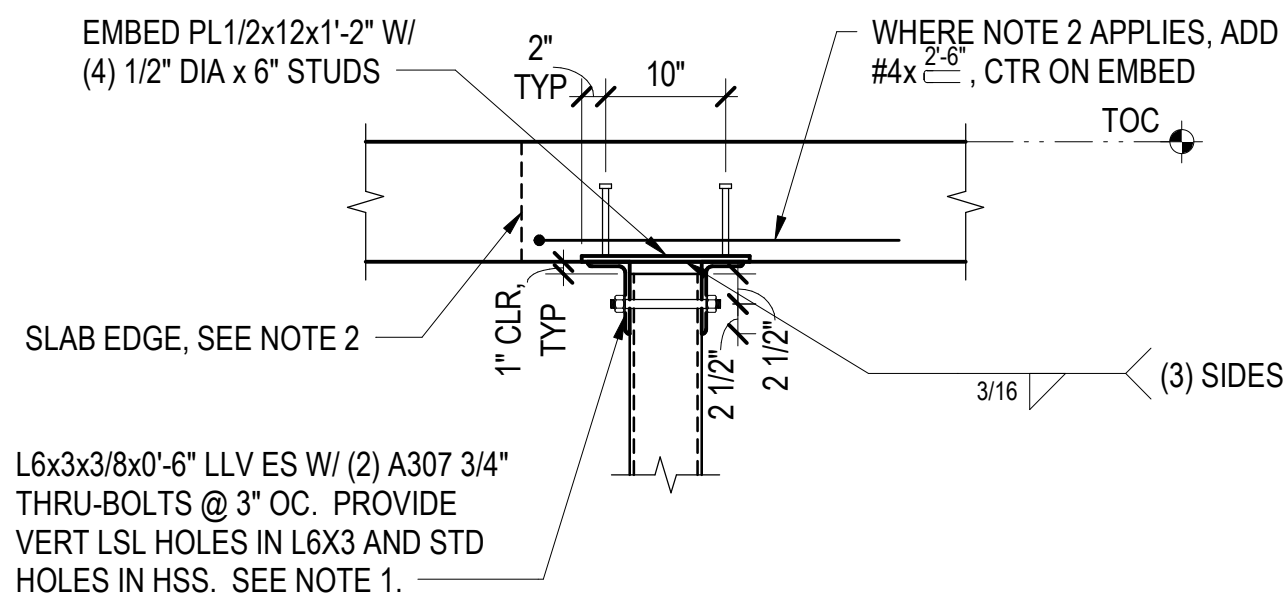

#### NOTES:


- WHERE NOTE APPLIES, BOLT TO BE CENTERED IN SLOTTED HOLE IN ANGLE. NUTS TO BE FINGER TIGHT. DAMAGE THREADS OF BOLT TO PREVENT BACK-OFF OF NUT.
- PROVIDE U-BAR REINFORCEMENT PERPENDICULAR TO SLAB EDGE WHERE EMBED IS LOCATED 6\"/>

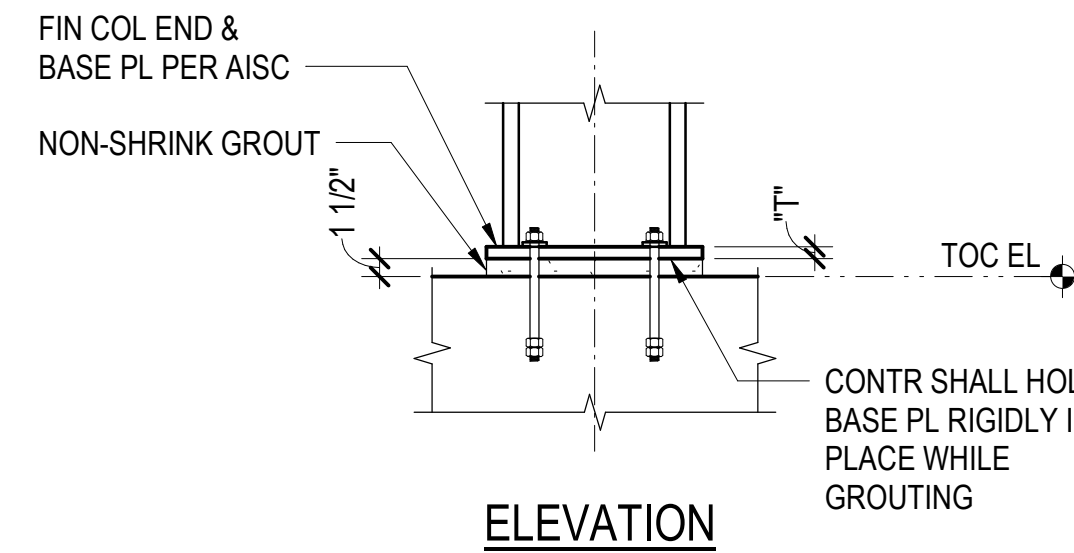

#### NOTES:


- TIGHTEN ANCHOR RODS SNUG TIGHT AND SCORE ROD THREADS TO PREVENT LOOSENING.
- BASE PLATE HOLE DIAMETER AND PLATE WASHER SHALL BE SIZED PER \"AISC MANUAL - TABLE 14-2\", UNLESS NOTED OTHERWISE.
- ANCHOR ROD GAGE SHALL BE AS FOLLOWS:  
W10: 5 INCHES  
W12: 6 INCHES  
W14: 8 INCHES

CONTRACTOR TO COORDINATE ANCHOR ROD GAGE WITH CONCRETE REINFORCING.

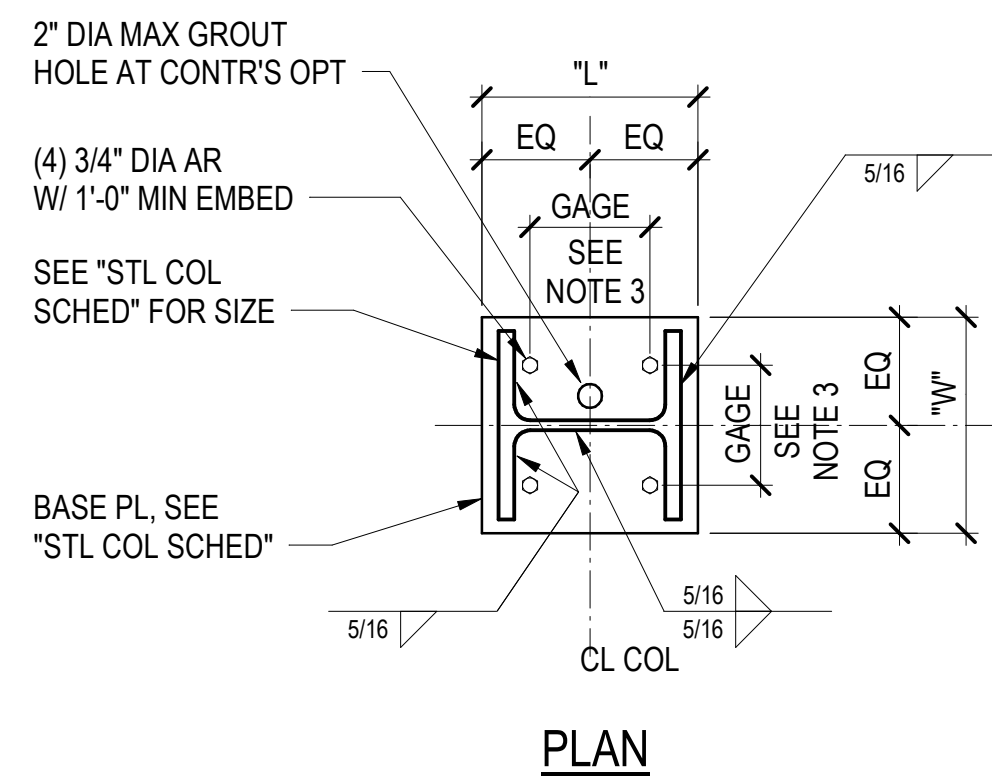

#### NOTES:

- TIGHTEN ANCHOR RODS SNUG TIGHT AND SCORE ROD THREADS TO PREVENT LOOSENING.
- BASE PLATE HOLE DIAMETER AND WASHER DIAMETER SHALL BE SIZED PER \"AISC MANUAL-TABLE 14-2\" UNLESS NOTED OTHERWISE.
- DIMENSION \"L\" IS PARALLEL TO WIDE FACE OF HSS UNLESS NOTED OTHERWISE.
- WHERE EDGE OF BASE PLATE IS LESS THAN 9/16 INCH FROM THE FACE OF THE HSS, PROVIDE A PARTIAL PENETRATION GROOVE WELD OF THE HSS TO THE BASE PLATE IN LIEU OF FILLET WELD ON THAT FACE OF THE HSS. GROOVE WELD SIZE SHALL BE THE THICKNESS OF THE HSS WALL OR 5/16 INCH, WHICHEVER IS LESS.

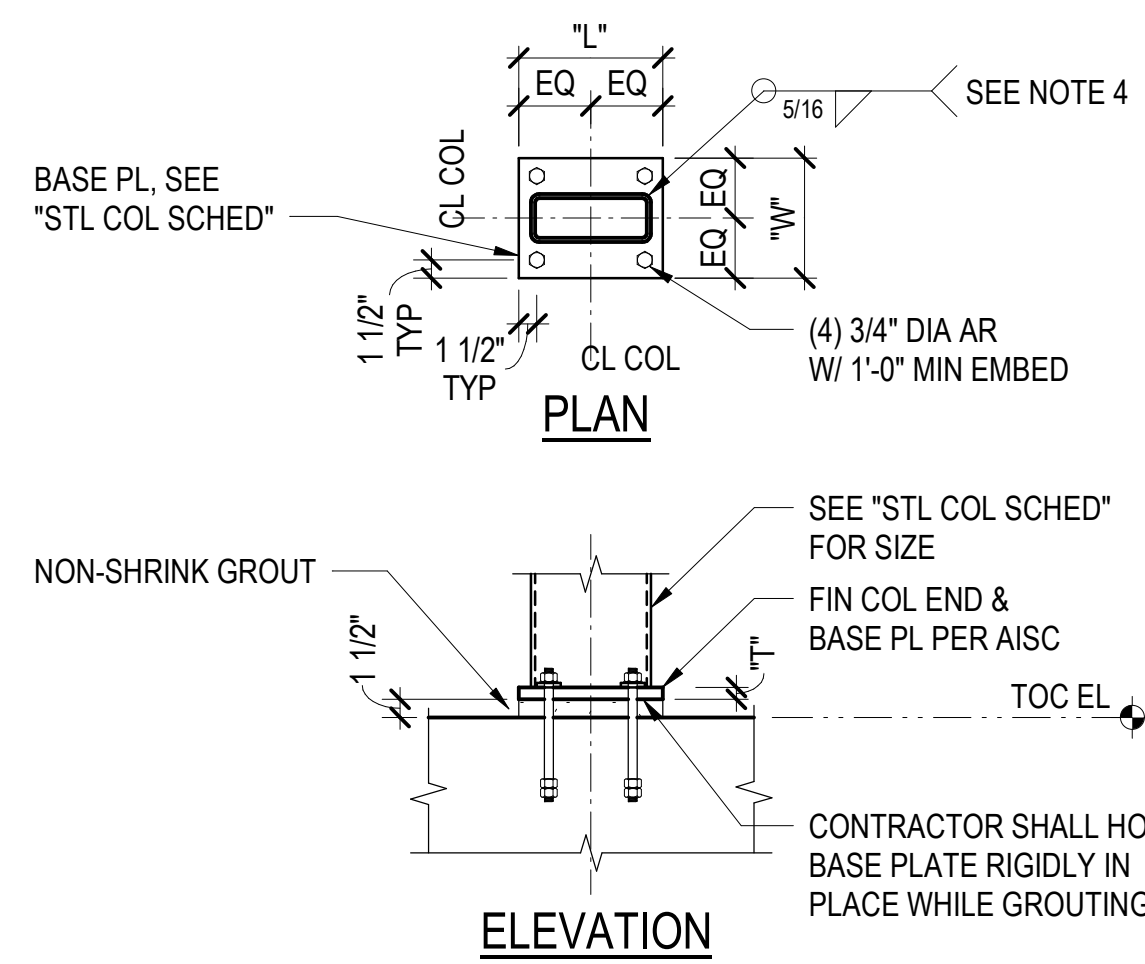


### 1 TYPICAL HSS POST TOP SLIP CONNECTION

TYPE	STEEL COLUMN SLAB PLATE SCHEDULE					
	BASE PLATE			EMBED PLATE		
	T1	L1	W1	T2	L2	W2
1	-	-	-	3/4	18	1'-6"
2	-	-	-	1	18	1'-6"
3	-	-	-	1 1/4	18	1'-6"
4	-	-	-	1 1/2	18	2'-0"
5	3/4	12	1'-0"	3/4	18	1'-6"
6	3/4	12	1'-0"	1 1/4	18	1'-6"
7	3/4	12	1'-0"	1	18	1'-6"
8	3/4	12	1'-2"	1 1/4	18	1'-6"
9	3/4	12	1'-0"	1 1/2	18	1'-6"
10	1	12	1'-2"	1 1/4	18	1'-6"
11	1	12	1'-2"	1 1/2	18	1'-6"
12	1	14	1'-4"	1 1/4	18	1'-6"
13	1	14	1'-4"	1 1/2	18	1'-6"
14	1	6	1'-2"	1	18	1'-6"
15	1	6	1'-2"	1 1/4	18	1'-6"
16	1 1/4	14	1'-4"	1 1/2	18	1'-6"
17	1 1/4	6	1'-2"	1 1/4	18	1'-6"
18	1 1/4	6	1'-6"	1 1/4	18	1'-6"
19	1 1/4	6	1'-6"	1 1/2	18	1'-6"
20	1 1/4	6	1'-8"	1 1/2	18	1'-8"
21	1 1/4	6	1'-6"	1 1/2	18	2'-0"
22	1 1/2	14	1'-4"	1 3/4	18	1'-6"
23	1 1/2	6	1'-8"	1 1/2	18	1'-8"
24	1 1/2	6	1'-8"	1 1/2	18	2'-0"
25	1 1/2	6	2'-0"	1 1/2	18	2'-0"
26	1 1/2	6	2'-0"	1 1/2	18	2'-2"
27	1 1/2	6	2'-0"	1 3/4	18	2'-0"
28	1 1/2	8	2'-2"	1 1/2	18	1'-6"
29	1 1/2	8	2'-2"	1 1/2	18	2'-2"
30	1 1/2	15	1'-7"	1 1/2	18	1'-6"
31	1 1/2	15	1'-7"	1 3/4	18	1'-6"
32	1	9	1'-3"	1 1/4	18	1'-6"


### 6 STEEL COLUMN SLAB PLATE SCHEDULE

### 2 TYPICAL COLUMN BASE PLATE, TYPE 1

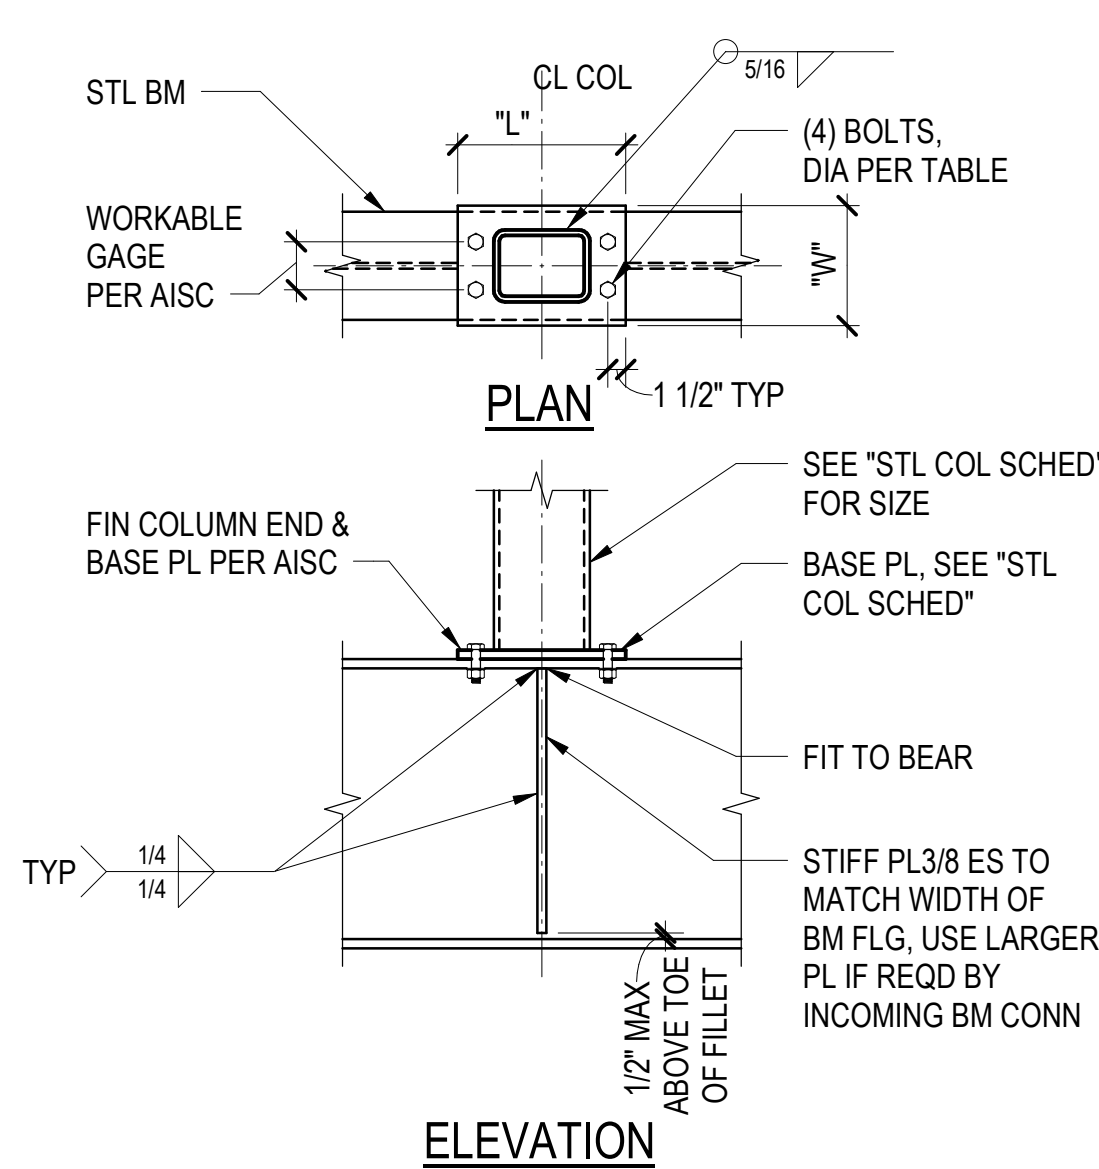

#### NOTES:

- DIMENSION \"L\" IS PARALLEL TO WIDE FACE OF HSS UNLESS NOTED OTHERWISE.

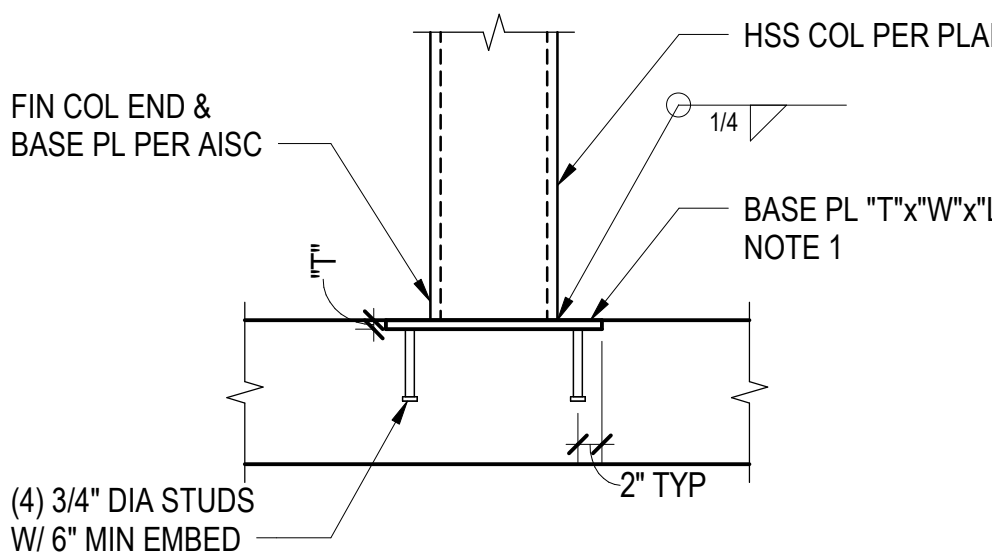

#### NOTES:


- ALIGN BASE PLATE LONGER SIDE WITH LONGER SIDE OF HSS COLUMN.

### 4 TYPICAL COLUMN BASE PLATE, TYPE 4


TYPE 5 BASE PLATE SCHEDULE		
COLUMN SIZE	W1 (IN)	L1 (IN)
HSS8x8x1/2	10	10
HSS6x6x5/16	8	8
-	-	-

#### NOTES:

- TIGHTEN ANCHOR RODS SNUG TIGHT AND SCORE ROD THREADS TO PREVENT LOOSENING.
- BASE PLATE HOLE DIAMETER AND WASHER DIAMETER SHALL BE SIZED PER \"AISC MANUAL-TABLE 14-2\" UNLESS NOTED OTHERWISE.
- DIMENSION \"L\" IS PARALLEL TO WIDE FACE OF HSS UNLESS NOTED OTHERWISE.
- WHERE EDGE OF BASE PLATE IS LESS THAN 9/16 INCH FROM THE FACE OF THE HSS, PROVIDE A PARTIAL PENETRATION GROOVE WELD OF THE HSS TO THE BASE PLATE IN LIEU OF FILLET WELD ON THAT FACE OF THE HSS. GROOVE WELD SIZE SHALL BE THE THICKNESS OF THE HSS WALL OR 5/16 INCH, WHICHEVER IS LESS.

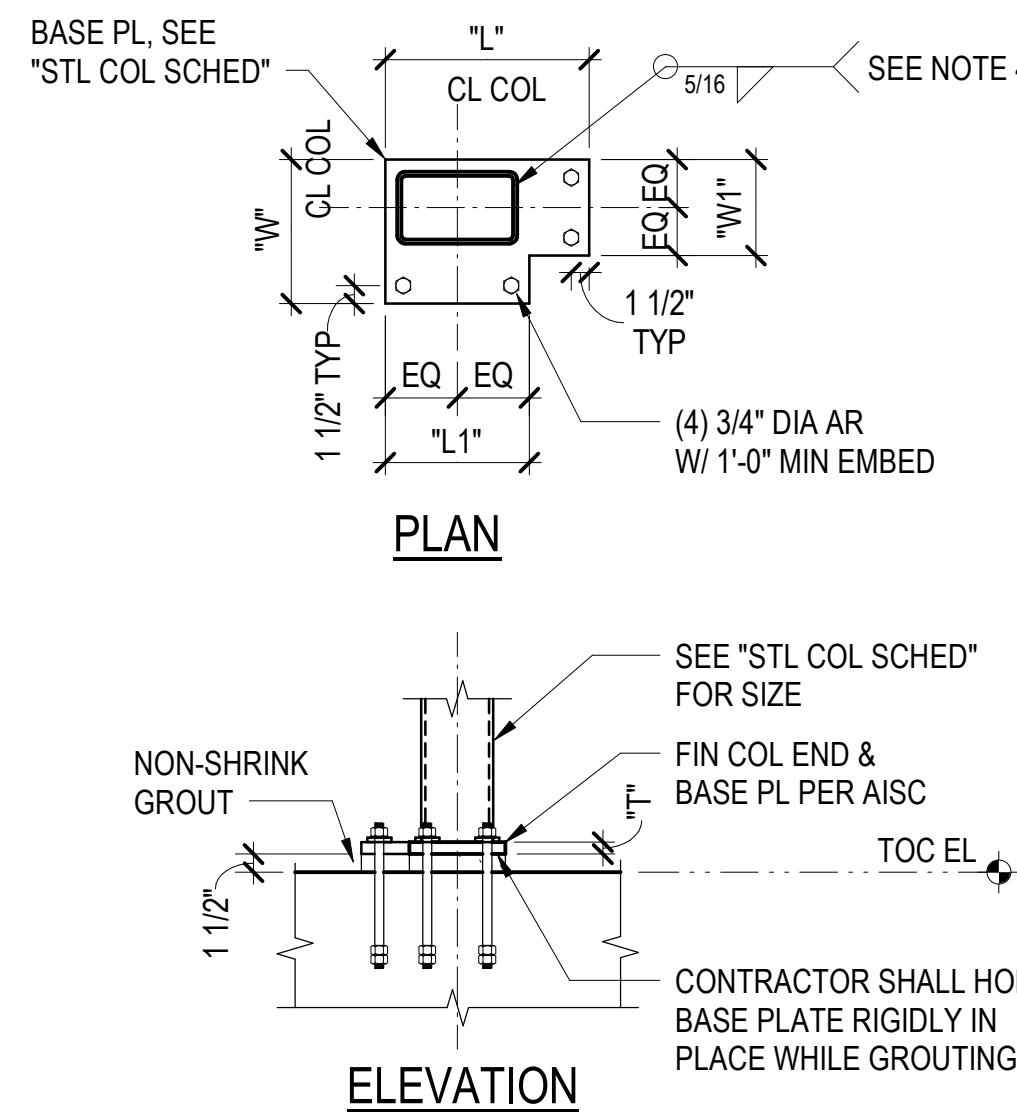


### 7 TYPICAL BASE PLATE, TYPE 6

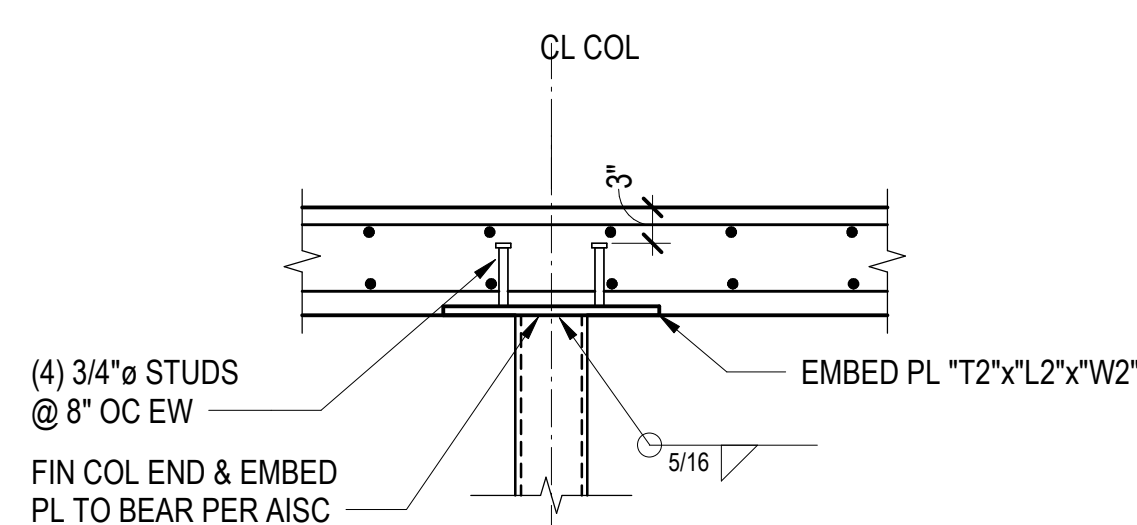

CONNECTION AT HSS COL


### 8 TYPICAL COLUMN BASE PLATE, TYPE 7

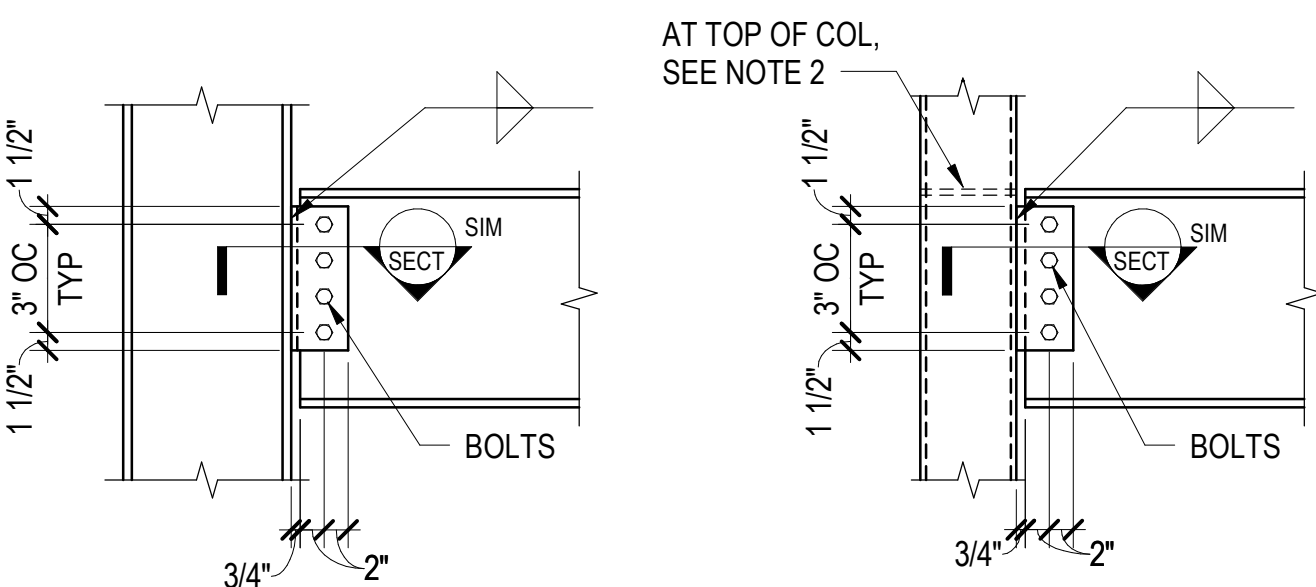

BEAM TO COLUMN FLANGE

BEAM TO HSS OR PIPE COLUMN

### 9 TYPICAL COLUMN BASE PLATE, TYPE 5

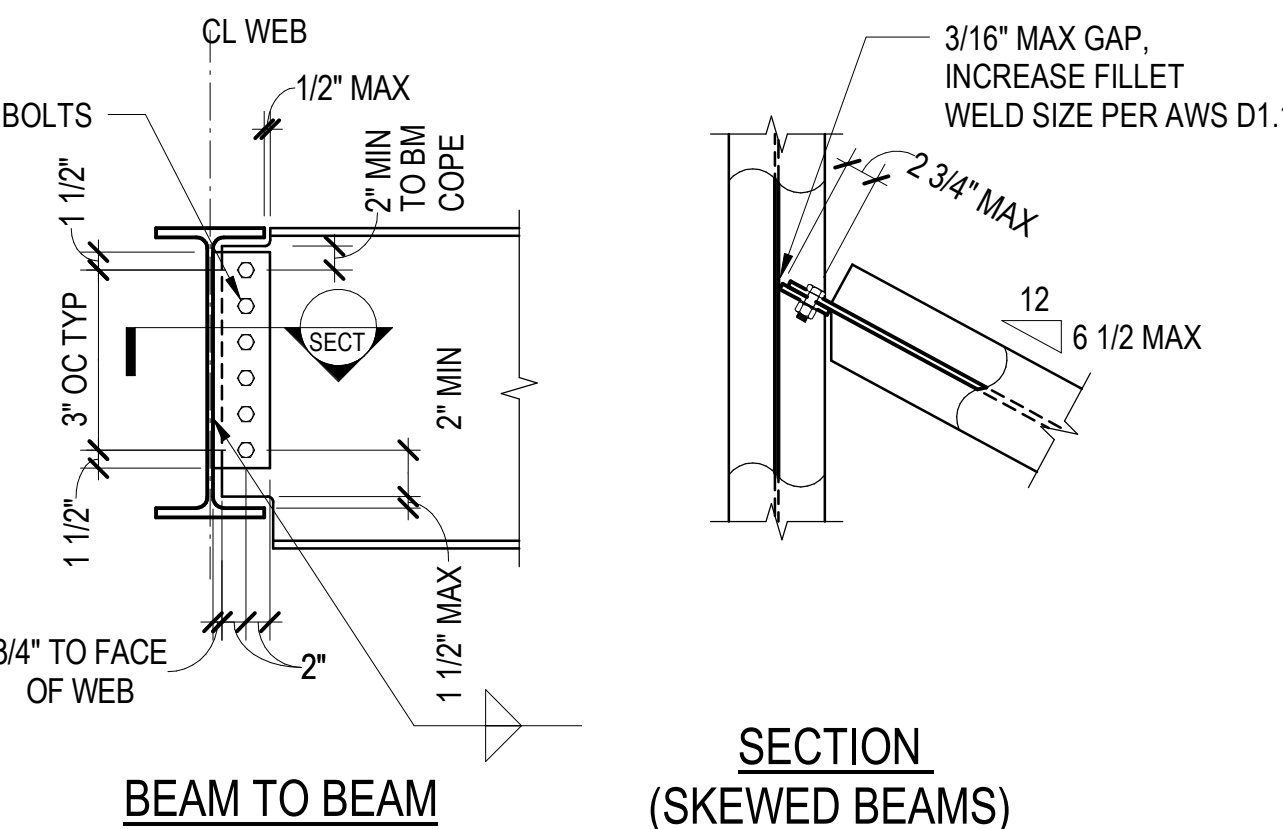


SECTION (SKEWED BEAMS)

TABLE A		
WIDE-FLANGE BEAM DEPTH	NUMBER OF BOLTS REQUIRED	MAXIMUM REACTION (KIPS)
W10	2	27
W12, W14	3	40
W16, W18	4	65
W21	5	91
W24	6	124
W27	7	150
W30 - W44	8	175

#### NOTES BELOW APPLY TO ALL TYPICAL CONNECTIONS UNLESS NOTED OTHERWISE:

- SEE PLANS FOR BEAM SIZE. UNLESS NOTED OTHERWISE, PROVIDE THE NUMBER OF 7/8 INCH DIAMETER GRADE A325 BOLTS SHOWN IN \"TABLE A\" BASED ON THE BEAM DEPTH.
- SHEAR TAB PLATES SHALL BE GRADE 50 MATERIAL, AND BE 1/4 INCH THICK WITH 3/16 INCH WELD EACH SIDE FOR (2) BOLTS, 5/16 INCH THICK WITH 1/4 INCH WELD EACH SIDE FOR (3) BOLTS TO (5) BOLTS, AND 3/8 INCH THICK WITH 1/4 INCH WELD EACH SIDE FOR (6) BOLTS OR MORE.
- BEAMS AND SHEAR TAB PLATES SHALL HAVE STANDARD ROUND HOLES (STD) UNLESS NOTED OTHERWISE. AT CONTRACTOR'S OPTION, HOLES IN SHEAR TAB PLATES MAY BE HORIZONTAL SHORT-SLOTTED HOLES.
- WHEN CONDITIONS VARY FROM THOSE SHOWN IN THE TYPICAL DETAIL, DESIGN CONNECTIONS ACCORDING TO THE AISC MANUAL OF STEEL CONSTRUCTION.


### 11 TYPICAL TOP OF STEEL COLUMN SUPPORTING CONCRETE FRAMING

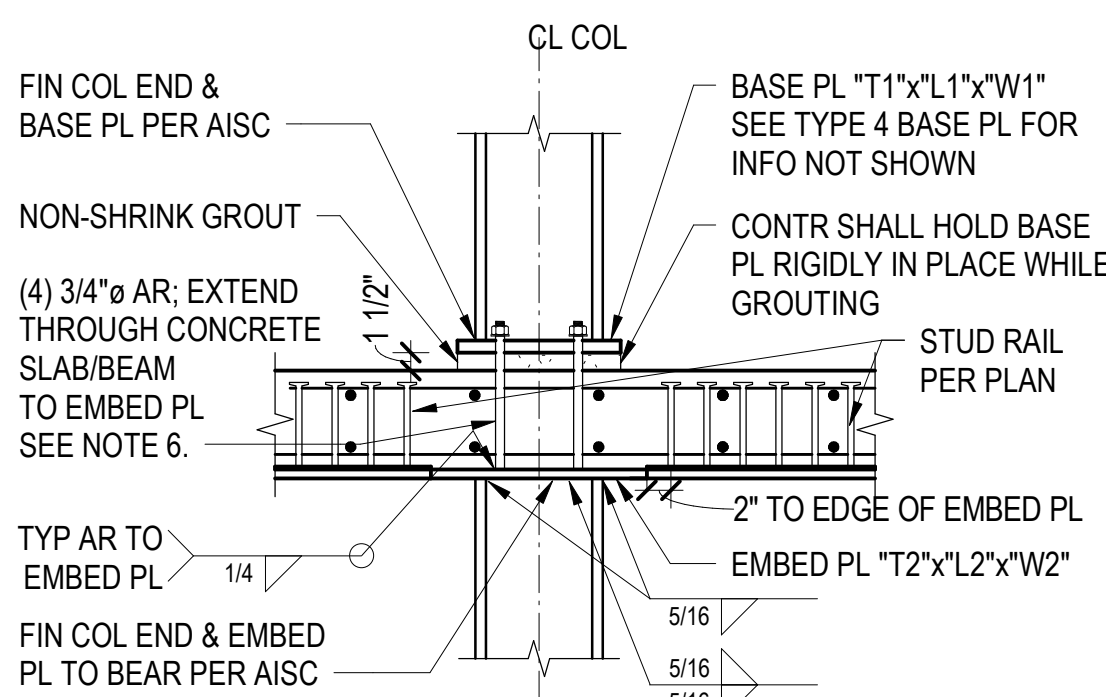

CONNECTION AT WF COL

#### NOTES:


- TIGHTEN ANCHOR RODS SNUG TIGHT AND SCORE ROD THREADS TO PREVENT LOOSENING.
- BASE PLATE HOLE DIAMETER AND PLATE WASHER SHALL BE SIZED PER \"AISC MANUAL -TABLE -TABLE 14-2\", UNLESS NOTED OTHERWISE.
- SEE STEEL COLUMN SLAB PLATE SCHEDULE FOR PLATE DIMENSIONS.

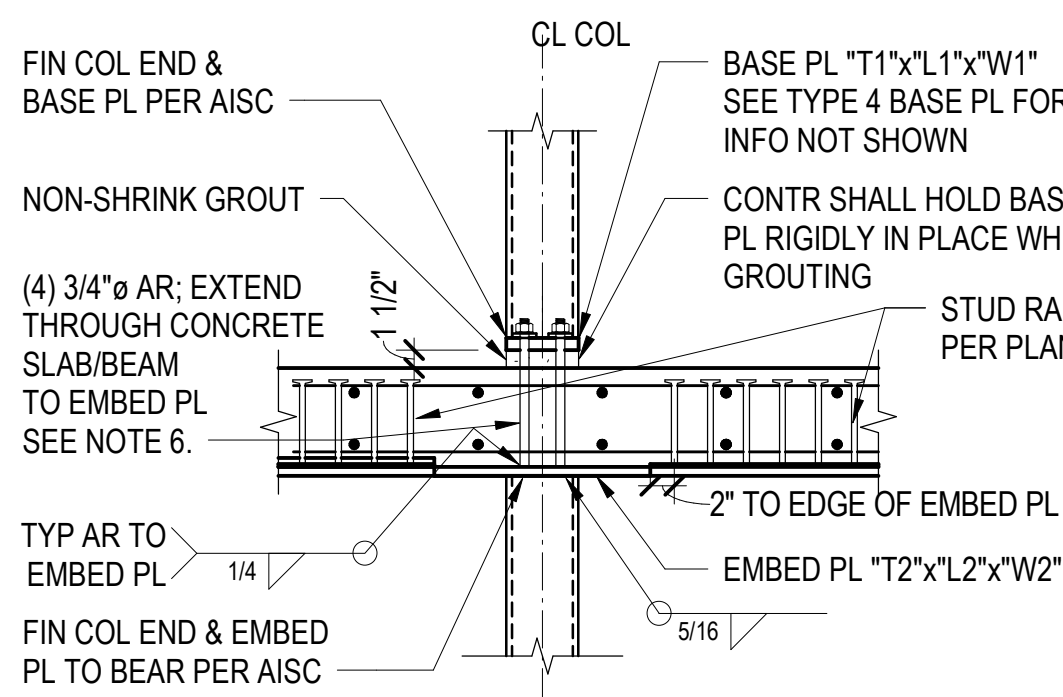


CONNECTION AT HSS COL

- WHERE COLUMN ABOVE IS WIDE FLANGE, ANCHOR ROD GAGE SHALL BE AS FOLLOWS:  
W10: 5 INCHES  
W12: 6 INCHES  
W14: 8 INCHES
- WHERE COLUMN ABOVE IS HSS AND WHERE EDGE OF BASE PLATE IS LESS THAN 9/16 INCH FROM THE FACE OF THE HSS, PROVIDE A PARTIAL PENETRATION GROOVE WELD OF THE HSS TO THE BASE PLATE IN LIEU OF FILLET WELD ON THAT FACE OF THE HSS. GROOVE WELD SIZE SHALL BE THE THICKNESS OF THE HSS WALL OR 5/16 INCH, WHICHEVER IS LESS.
- ANCHOR ROD TO BE SMOOTH SHANK THROUGH BEAM/SLAB THICKNESS.

### 13 TYPICAL BEAM TO BEAM / BEAM TO COLUMN CONNECTION

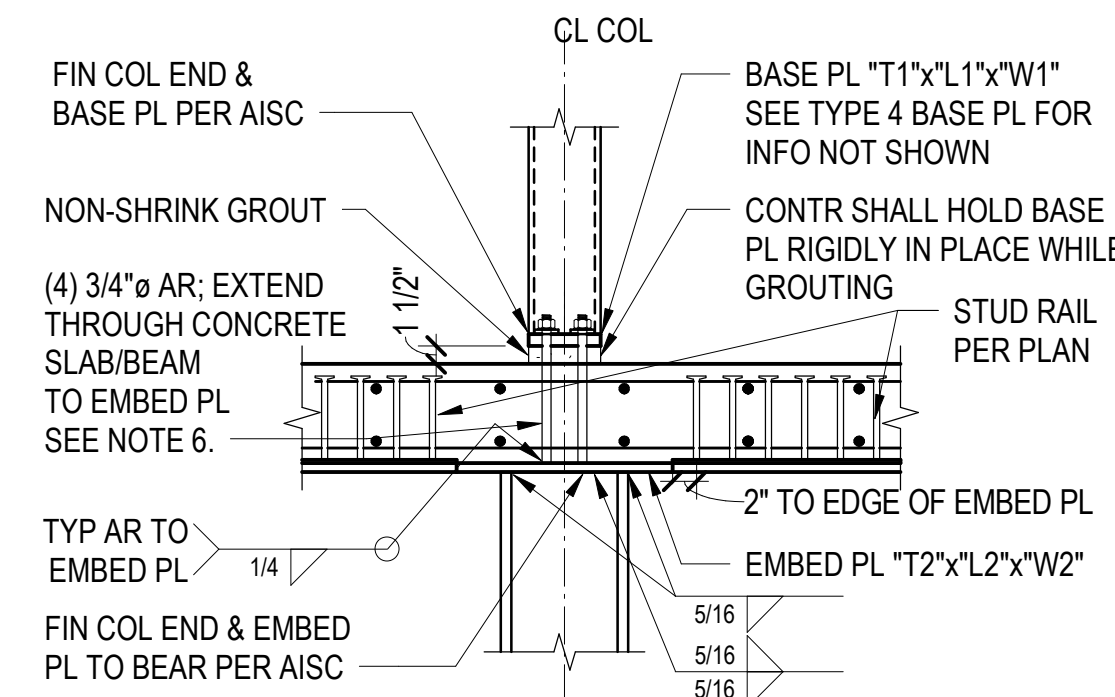


CONNECTION AT HSS COL ABOVE WITH WF COL BELOW

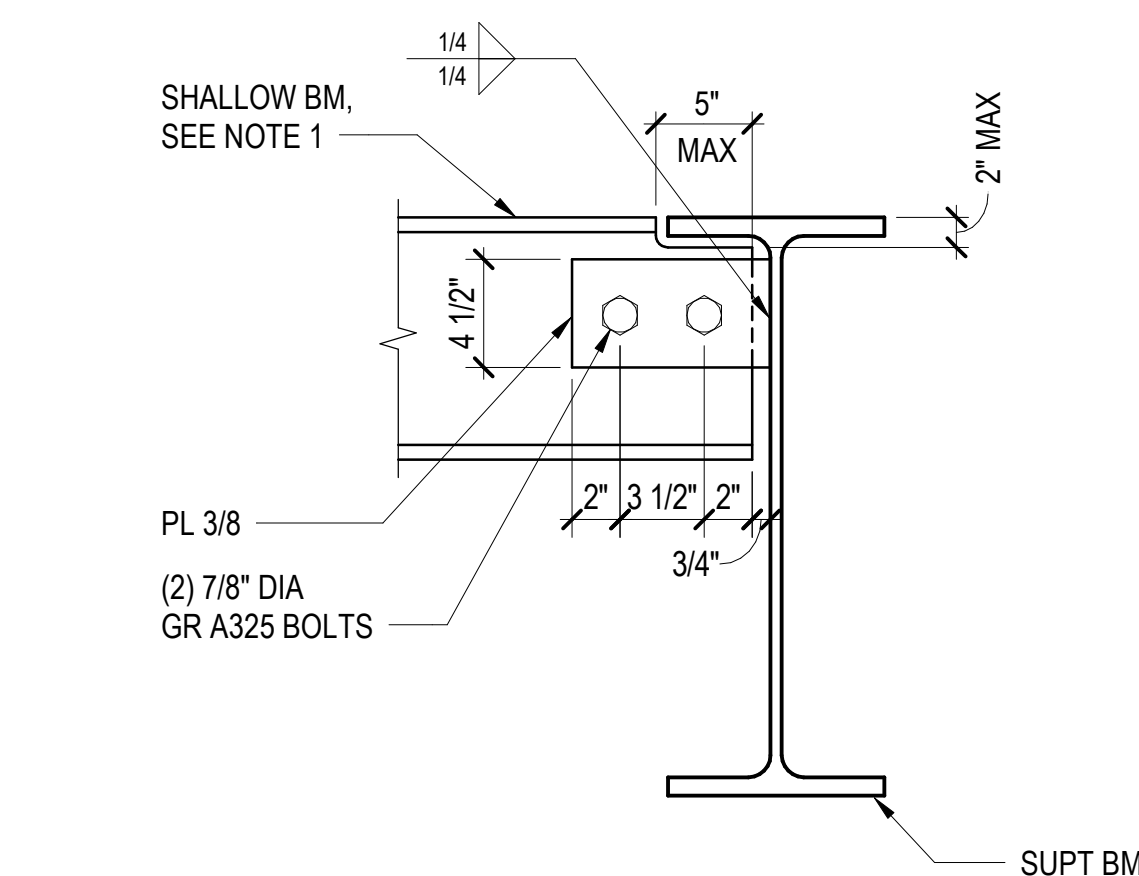

#### NOTES:

- THIS DETAIL SHALL BE USED ONLY FOR BEAMS UP TO 8 INCHES DEEP AND WEIGHING AT LEAST 8 LB/FT. SEE \"TYPICAL BEAM TO BEAM / BEAM TO COLUMN CONNECTION\" FOR DEEPER BEAMS.
- ALL PLATES SHALL HAVE Fy = 50 KSI MINIMUM.

### 15 GENERAL NOTES FOR STEEL CONNECTIONS

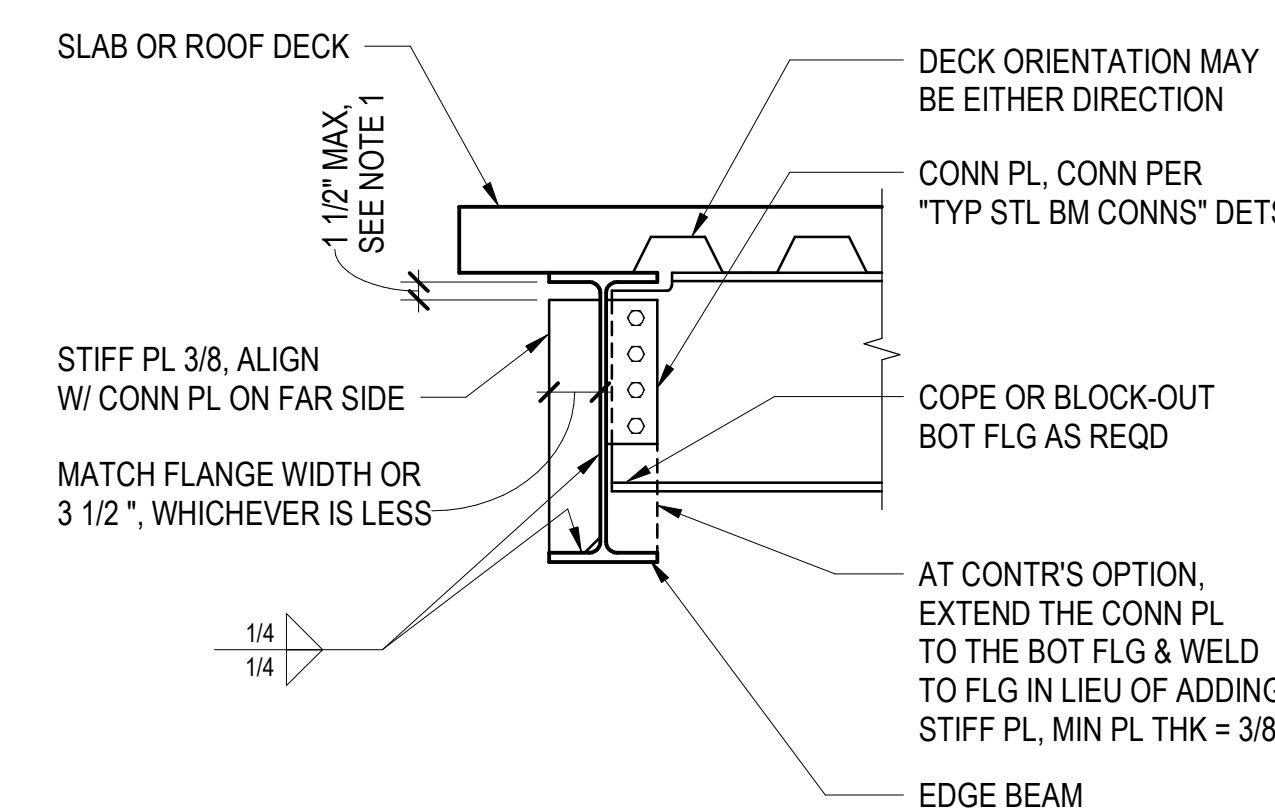


#### NOTES:

- AT LOCATIONS WHERE A CONCRETE SLAB DOES NOT EXIST AT EDGE BEAM, THE STIFFENER PLATE OR CONNECTION PLATE SHALL BE EXTENDED TO FULL DEPTH AND WELDED ON THREE SIDES.
- THIS DETAIL APPLIES AT ALL EDGE OF SLAB CONDITIONS.

### 17 TYPICAL STEEL COLUMN SUPPORTING CONCRETE FRAMING

### 19 TYPICAL SHALLOW BEAM CONNECTION

### 20 TYPICAL STEEL EDGE BEAM STIFFENER



Reserved for permit stamp

150 South Jackson St., Suite 800  
Seattle, Washington 98104 USA  
+1 206 624 8970 dave@magnum.com

Olson Kundig

project:  
SOMMET BLANC - ABC  
DEER VALLEY, UTAH

MAGNUSSON KLEMENCIC ASSOCIATES

Structural + Civil Engineers  
Seattle Chicago  
www.mka.com  
206.292.1200

principal architect \_\_\_\_\_

project manager \_\_\_\_\_

drawn by \_\_\_\_\_

checked by \_\_\_\_\_

job no. 20052

date 05/17/2024

revisions:

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

3 8/19/2024 ASI-004

2 7/26/2024 ASI-002

1 05/17/2024 IFC-2

04/08/2024 IFC-SET 1 OF 3

11/18/2022 95% CD

no. date by

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

TYPICAL STEEL DETAILS

S4.11

IFC SET 2 OF 3

05/17/2024




























+1 206 624 5670 olsonkundig.com

SOMMET BLANC - ABC  
DEER VALLEY, UTAH



**MKA ASSOCIATES**  
Civil Engineers  
Seattle Chicago  
www.mka.com  
206 292 1200

TOWER B - ROOF STEEL COLUMN SCHEDULE															
TOWER B - ROOF															TOWER B - ROOF
8448" - 9"															8448" - 9"
TOWER B - LEVEL 7															TOWER B - LEVEL 7
8436" - 6"	BASE PL 1x8x1'-0" 4/S4.11	BASE PL 1x8x1'-0" 4/S4.11	BASE PL 1x8x1'-0" 4/S4.11	BASE PL 1x8x1'-0" 4/S4.11	BASE PL 1x8x1'-0" 4/S4.11	BASE PL 3/4x12x1'-0" 2/S4.11	BASE PL 3/4x12x1'-0" 2/S4.11	BASE PL 3/4x12x1'-0" 2/S4.11	BASE PL 3/4x12x1'-0" 2/S4.11	BASE PL 3/4x12x1'-0" 2/S4.11	BASE PL 3/4x12x1'-0" 2/S4.11	BASE PL 3/4x12x1'-0" 2/S4.11	BASE PL 3/4x12x1'-0" 2/S4.11	BASE PL 1x8x1'-0" 4/S4.11	8436" - 6"
Column Locations	SCB29	SCB30	SCB31	SCB32	SCB33	SCB34	SCB35	SCB36	SCB37	SCB38	SCB39	SCB40	SCB41	SCB42	

## TOWER B - ROOF STEEL COLUMN SCHEDULE

























**NOTES:**

1. BASE PLATES SHALL HAVE  $F_y = 50$  KSI, UNLESS NOTED OTHERWISE.
2. **X** INDICATES CONNECTION OF STEEL COLUMN TO CONCRETE SLAB.  
SEE "TYPICAL TOP OF STEEL COLUMN SUPPORTING CONCRETE FRAMING" DETAIL,  
"TYPICAL STEEL COLUMN SUPPORTING CONCRETE FRAMING" DETAIL, AND  
"STEEL COLUMN SLAB PLATE SCHEDULE" ON S4.11


























































































## TOWER B - STEEL COLUMN SCHEDULE


## S4.B.10




TOWER C - ROOF STEEL COLUMN SCHEDULE																									
ROOF 8475' - 0"																									ROOF 8475' - 0"
LEVEL 8 8463' - 0"	BASE PL 3/4x12x1'-0" 2/S4.11	BASE PL 3/4x12x1'-0" 2/S4.11	BASE PL 3/4x12x1'-0" 2/S4.11	BASE PL 3/4x12x1'-0" 2/S4.11	BASE PL 1x8x1'-0" 4/S4.11	BASE PL 1x8x1'-0" 4/S4.11	BASE PL 1x8x1'-0" 4/S4.11	BASE PL 1x8x1'-0" 4/S4.11	BASE PL 1x8x1'-0" 4/S4.11	BASE PL 3/4x12x1'-0" 2/S4.11	BASE PL 3/4x12x1'-0" 2/S4.11	BASE PL 3/4x12x1'-0" 2/S4.11	BASE PL 3/4x12x1'-0" 2/S4.11	BASE PL 3/4x12x1'-0" 2/S4.11	BASE PL 3/4x12x1'-0" 2/S4.11	BASE PL 1x8x1'-0" 4/S4.11	BASE PL 1x8x1'-4" 4/S4.11	BASE PL 1x8x1'-4" 4/S4.11	BASE PL 1x8x1'-4" 4/S4.11	BASE PL 1x8x1'-0" 4/S4.11	BASE PL 1x8x1'-0" 4/S4.11	BASE PL 1x8x1'-0" 4/S4.11	BASE PL 1x8x1'-4" 4/S4.11	BASE PL 3/4x12x1'-0" 2/S4.11	LEVEL 8 8463' - 0"
Column Locations	SCC15	SCC16	SCC17	SCC18	SCC19	SCC20	SCC21	SCC22	SCC23	SCC24	SCC25	SCC26	SCC27	SCC30	SCC31	SCC32	SCC28	SCC29	SCC33	SCC34	SCC35	SCC36	SCC37	SCC38	

TOWER C - ROOF STEEL COLUMN SCHEDULE

TOWER C - STEEL COLUMN SCHEDULE														
LEVEL 8 8463' - 0"														LEVEL 8 8463' - 0"
LEVEL 7 8450' - 6"														LEVEL 7 8450' - 6"
LEVEL 6 8438' - 6"														LEVEL 6 8438' - 6"
LEVEL 5 8426' - 6"														LEVEL 5 8426' - 6"
LEVEL 4 8414' - 6"														LEVEL 4 8414' - 6"
LEVEL 3 8402' - 6"														LEVEL 3 8402' - 6"
LEVEL 2 8390' - 6"														LEVEL 2 8390' - 6"
LEVEL 1 8376' - 6"														LEVEL 1 8376' - 6"
PARKING 8364' - 6"	BASE PL 1 1/2x15x1'-7" SEE 2/S4.11	BASE PL 1 1/2x14x1'-4" SEE 2/S4.11	BASE PL 3/4x12x1'-2" SEE 2/S4.11	BASE PL 3/4x12x1'-2" SEE 2/S4.11	BASE PL 3/4x12x1'-2" SEE 2/S4.11	BASE PL 3/4x12x1'-2" SEE 2/S4.11	BASE PL 1 1/2x15x1'-7" SEE 2/S4.11	BASE PL 1 1/2x14x1'-4" SEE 2/S4.11	BASE PL 1 1/2x6x2'-0" SEE 4/S4.11	BASE PL 1 1/2x8x2'-2" SEE 4/S4.11	BASE PL 1 1/2x14x1'-4" SEE 4/S4.11	BASE PL 1 1/2x14x1'-4" SEE 4/S4.11	BASE PL 1 1/2x14x1'-4" SEE 4/S4.11	PARKING 8364' - 6"
Column Locations	SCC1	SCC2	SCC3	SCC5	SCC6	SCC8	SCC9	SCC10	SCC11	SCC12	SCC13	SCC14		

- NOTES:
1. BASE PLATES SHALL HAVE Fy = 50 KSI, UNLESS NOTED OTHERWISE.
  2.  INDICATES CONNECTION OF STEEL COLUMN TO CONCRETE SLAB. SEE TYPICAL TOP OF STEEL COLUMN SUPPORTING CONCRETE FRAMING DETAIL, TYPICAL STEEL COLUMN SUPPORTING CONCRETE FRAMING DETAIL, AND "STEEL COLUMN SLAB PLATE SCHEDULE" ON S4.11

TOWER C - STEEL COLUMN SCHEDULE



Reserved for permit stamp

159 South Jackson St., Suite 600  
Seattle, Washington 98104 USA  
+1 206 624 9970 olsonkundig.com

Olson Kundig

project  
SOMMET BLANC - ABC  
DEER VALLEY, UTAH

MAGNUSSON  
KLEMENCIC  
ASSOCIATES

Structural + Civil Engineers

Seattle Chicago  
www.mka.com  
206.292.1200

principal architect \_\_\_\_\_  
project manager \_\_\_\_\_  
drawn by \_\_\_\_\_

checked by \_\_\_\_\_  
job no. 20052  
date 05/17/2024

revisions:

5 01/07/2025 ASI-007

1 09/17/2024 IFC 2

04/08/2024 IFC SET 1 OF 3

11/18/2022 95% CD

no. date by








IFC SET 2 OF 3

05/17/2024

TOWER C STEEL  
COLUMN  
SCHEDULE

S4.C.10



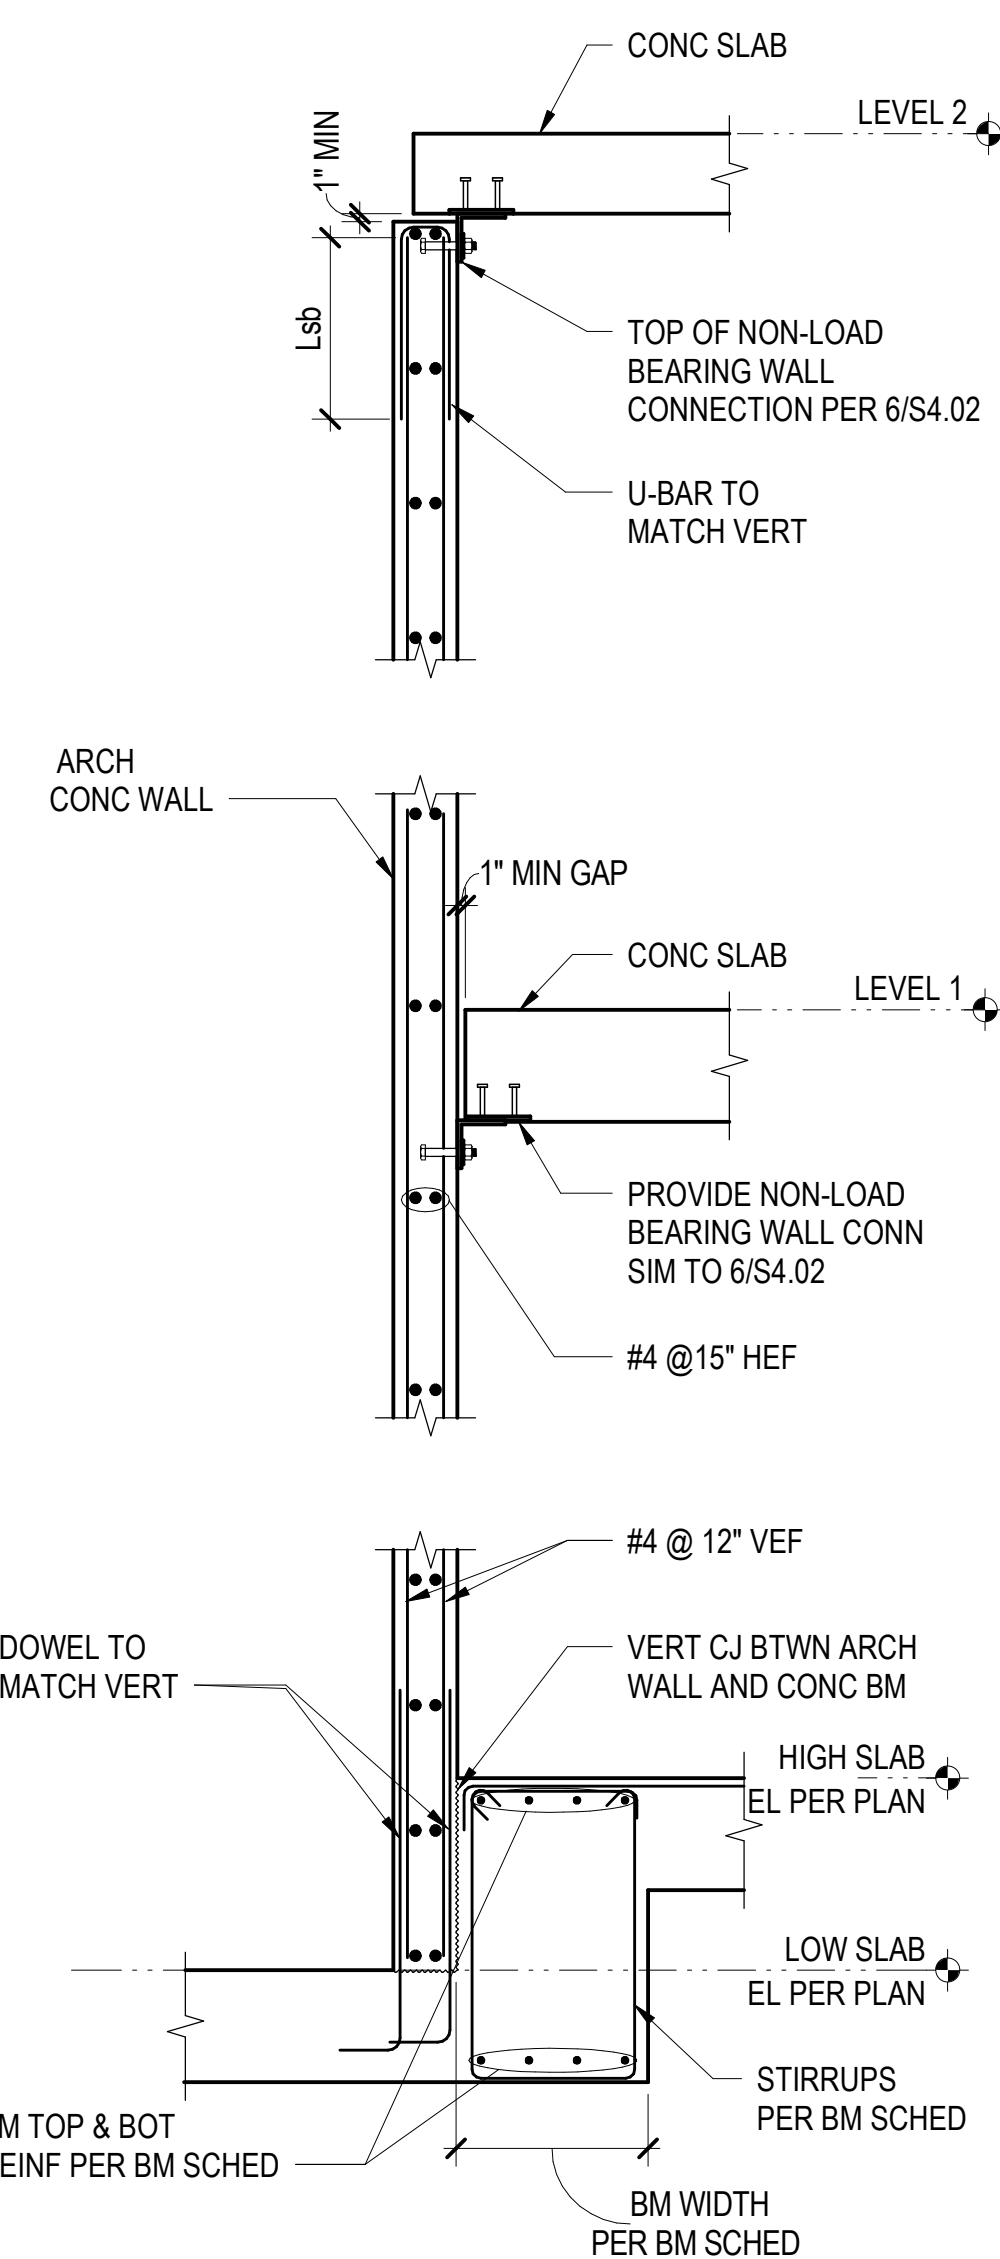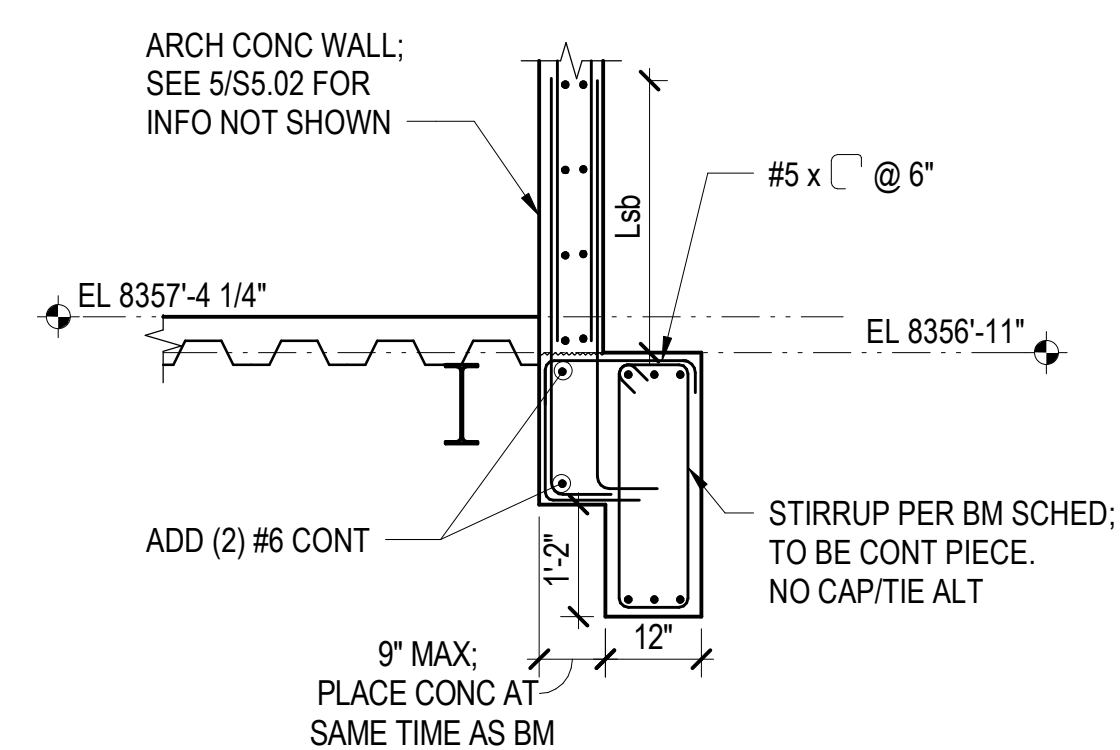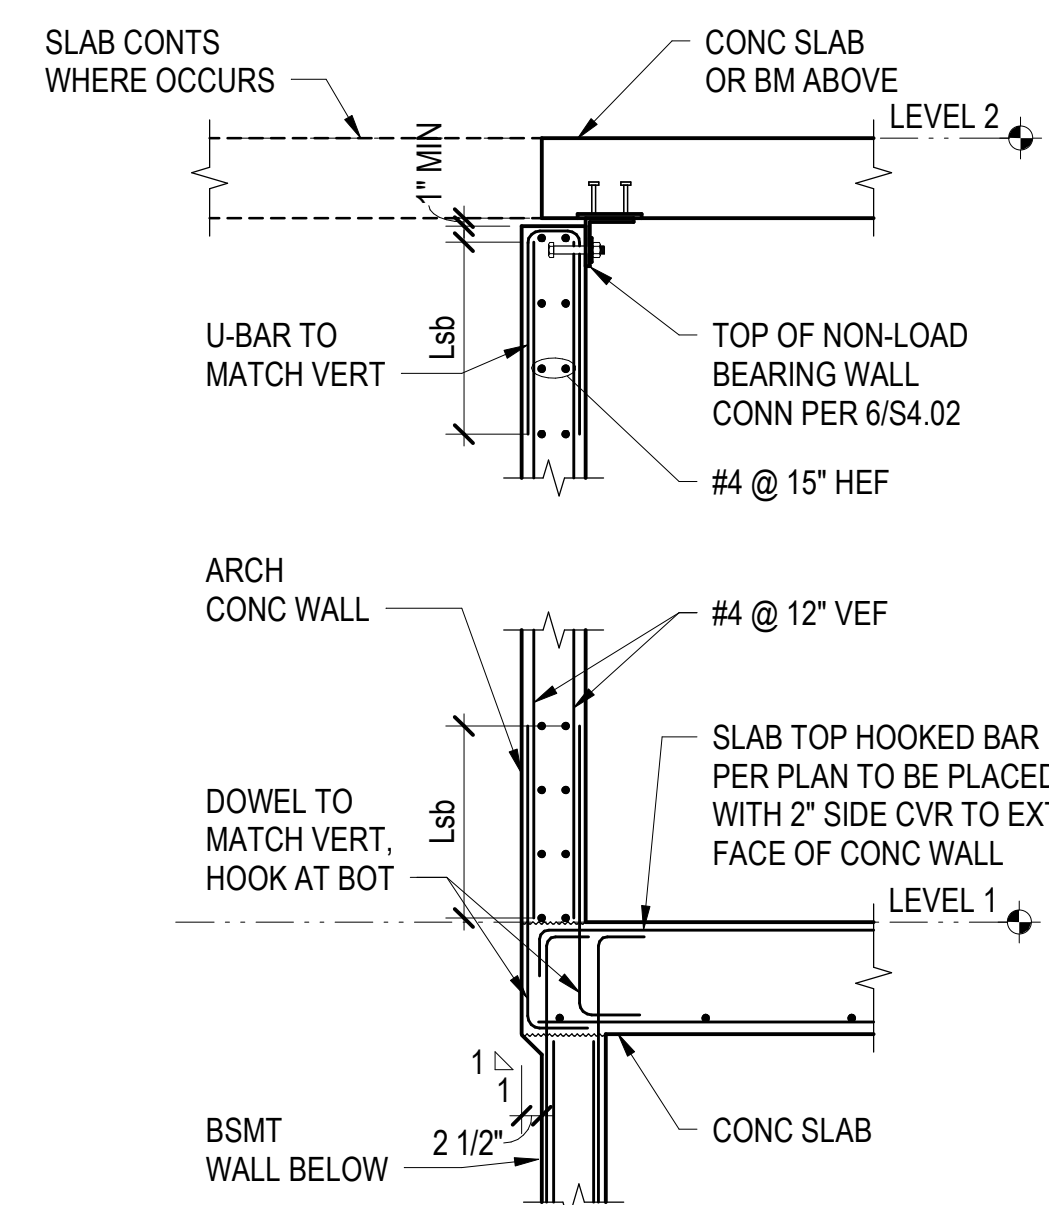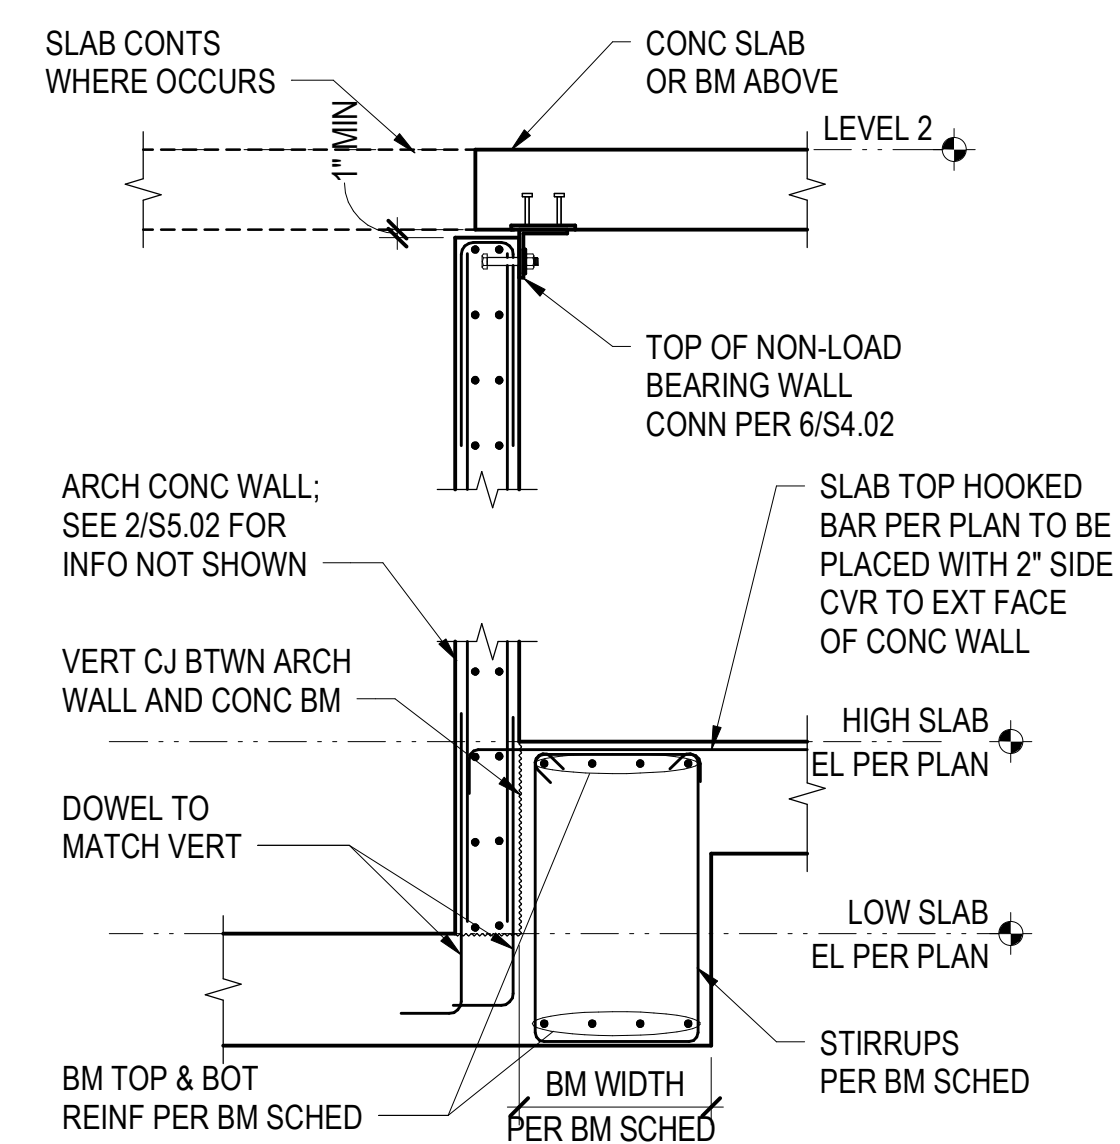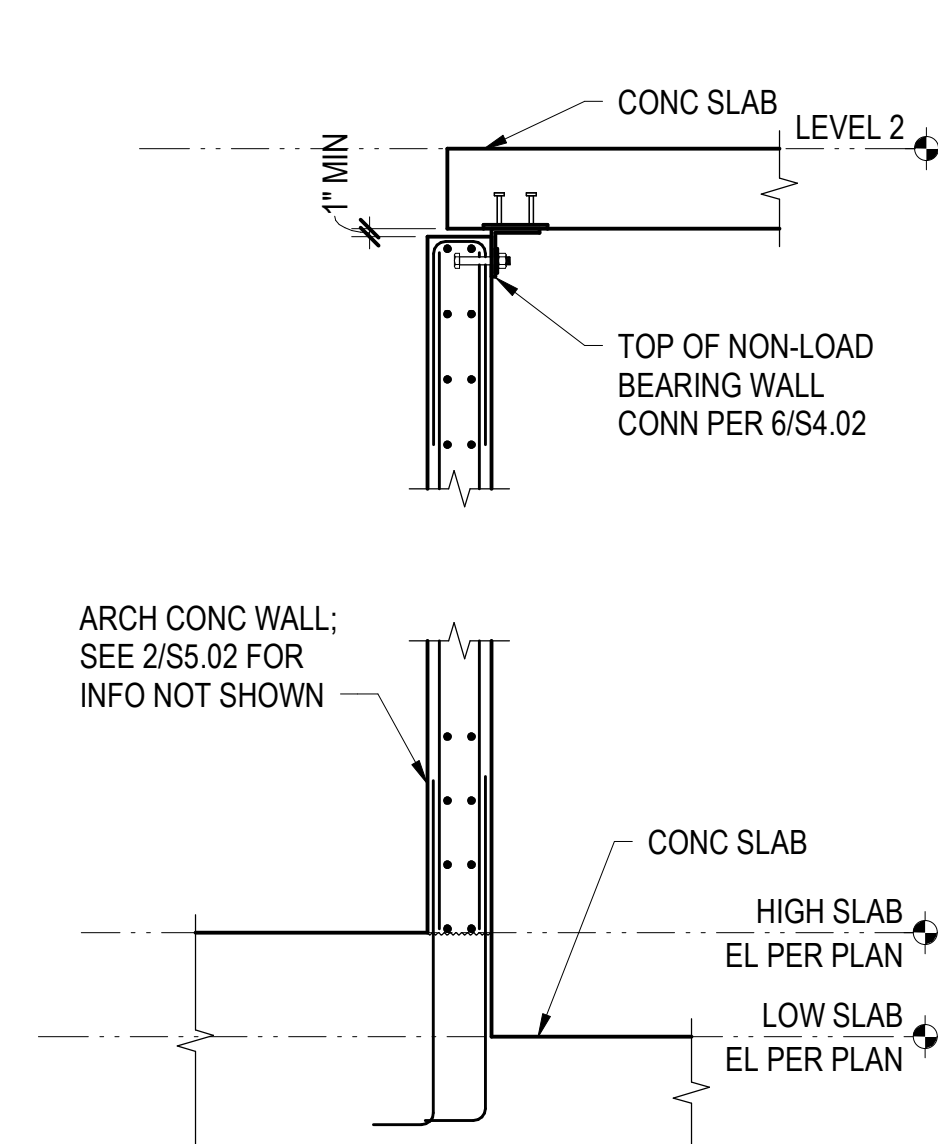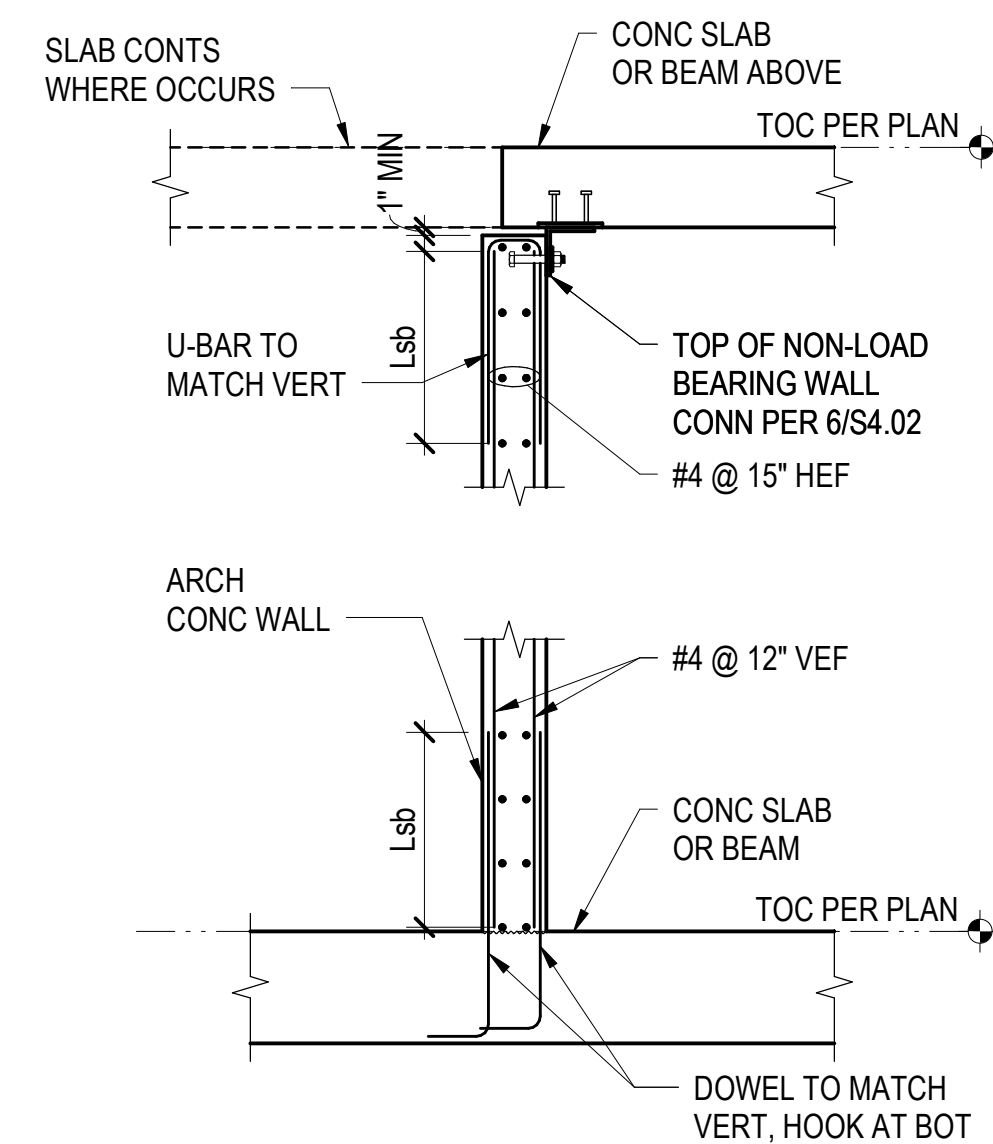

Reserved for permit stamp

159 South Jackson St, Suite 600  
Seattle, Washington 98104 USA  
1 206 624 5670 [olsonkunding.com](mailto:olsonkunding.com)

# Olson Kundig

Project: **SOMMET BLANC - ABC**  
**DEER VALLEY, UTAH**

MAGNUSSON  
KLEMENCIC  
ASSOCIATES

### Structural + Civil Engineers

Seattle Chicago  
www.mika.com  
206 292 1200

principal architect

project manager

drawn by

checked by \_\_\_\_\_

job no. 20052

date 05/17/2024

revisions:

3 8/19/2024 ASI-004

no.	date	br
-----	------	----


IFC SET 2 OF 3

05/17/2024

## TOWER A & B CONCRETE SECTIONS AND DETAILS

**S5.02**





1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65  
66  
67  
68  
69  
70  
71  
72  
73  
74  
75  
76  
77  
78  
79  
80  
81  
82  
83  
84  
85  
86  
87  
88  
89  
90  
91  
92  
93  
94  
95  
96  
97  
98  
99  
100  
101  
102  
103  
104  
105  
106  
107  
108  
109  
110  
111  
112  
113  
114  
115  
116  
117  
118  
119  
120  
121  
122  
123  
124  
125  
126  
127  
128  
129  
130  
131  
132  
133  
134  
135  
136  
137  
138  
139  
140  
141  
142  
143  
144  
145  
146  
147  
148  
149  
150  
151  
152  
153  
154  
155  
156  
157  
158  
159  
160  
161  
162  
163  
164  
165  
166  
167  
168  
169  
170  
171  
172  
173  
174  
175  
176  
177  
178  
179  
180  
181  
182  
183  
184  
185  
186  
187  
188  
189  
190  
191  
192  
193  
194  
195  
196  
197  
198  
199  
200  
201  
202  
203  
204  
205  
206  
207  
208  
209  
210  
211  
212  
213  
214  
215  
216  
217  
218  
219  
220  
221  
222  
223  
224  
225  
226  
227  
228  
229  
230  
231  
232  
233  
234  
235  
236  
237  
238  
239  
240  
241  
242  
243  
244  
245  
246  
247  
248  
249  
250  
251  
252  
253  
254  
255  
256  
257  
258  
259  
260  
261  
262  
263  
264  
265  
266  
267  
268  
269  
270  
271  
272  
273  
274  
275  
276  
277  
278  
279  
280  
281  
282  
283  
284  
285  
286  
287  
288  
289  
290  
291  
292  
293  
294  
295  
296  
297  
298  
299  
300  
301  
302  
303  
304  
305  
306  
307  
308  
309  
310  
311  
312  
313  
314  
315  
316  
317  
318  
319  
320  
321  
322  
323  
324  
325  
326  
327  
328  
329  
330  
331  
332  
333  
334  
335  
336  
337  
338  
339  
340  
341  
342  
343  
344  
345  
346  
347  
348  
349  
350  
351  
352  
353  
354  
355  
356  
357  
358  
359  
360  
361  
362  
363  
364  
365  
366  
367  
368  
369  
370  
371  
372  
373  
374  
375  
376  
377  
378  
379  
380  
381  
382  
383  
384  
385  
386  
387  
388  
389  
390  
391  
392  
393  
394  
395  
396  
397  
398  
399  
400  
401  
402  
403  
404  
405  
406  
407  
408  
409  
410  
411  
412  
413  
414  
415  
416  
417  
418  
419  
420  
421  
422  
423  
424  
425  
426  
427  
428  
429  
430  
431  
432  
433  
434  
435  
436  
437  
438  
439  
440  
441  
442  
443  
444  
445  
446  
447  
448  
449  
450  
451  
452  
453  
454  
455  
456  
457  
458  
459  
460  
461  
462  
463  
464  
465  
466  
467  
468  
469  
470  
471  
472  
473  
474  
475  
476  
477  
478  
479  
480  
481  
482  
483  
484  
485  
486  
487  
488  
489  
490  
491  
492  
493  
494  
495  
496  
497  
498  
499  
500  
501  
502  
503  
504  
505  
506  
507  
508  
509  
510  
511  
512  
513  
514  
515  
516  
517  
518  
519  
520  
521  
522  
523  
524  
525  
526  
527  
528  
529  
530  
531  
532  
533  
534  
535  
536  
537  
538  
539  
540  
541  
542  
543  
544  
545  
546  
547  
548  
549  
550  
551  
552  
553  
554  
555  
556  
557  
558  
559  
560  
561  
562  
563  
564  
565  
566  
567  
568  
569  
570  
571  
572  
573  
574  
575  
576  
577  
578  
579  
580  
581  
582  
583  
584  
585  
586  
587  
588  
589  
590  
591  
592  
593  
594  
595  
596  
597  
598  
599  
600  
601  
602  
603  
604  
605  
606  
607  
608  
609  
610  
611  
612  
613  
614  
615  
616  
617  
618  
619  
620  
621  
622  
623  
624  
625  
626  
627  
628  
629  
630  
631  
632  
633  
634  
635  
636  
637  
638  
639  
640  
641  
642  
643  
644  
645  
646  
647  
648  
649  
650  
651  
652  
653  
654  
655  
656  
657  
658  
659  
660  
661  
662  
663  
664  
665  
666  
667  
668  
669  
670  
671  
672  
673  
674  
675  
676  
677  
678  
679  
680  
681  
682  
683  
684  
685  
686  
687  
688  
689  
690  
691  
692  
693  
694  
695  
696  
697  
698  
699  
700  
701  
702  
703  
704  
705  
706  
707  
708  
709  
710  
711  
712  
713  
714  
715  
716  
717  
718  
719  
720  
721  
722  
723  
724  
725  
726  
727  
728  
729  
730  
731  
732  
733  
734  
735  
736  
737  
738  
739  
740  
741  
742  
743  
744  
745  
746  
747  
748  
749  
750  
751  
752  
753  
754  
755  
756  
757  
758  
759  
760  
761  
762  
763  
764  
765  
766  
767  
768  
769  
770  
771  
772  
773  
774  
775  
776  
777  
778  
779  
780  
781  
782  
783  
784  
785  
786  
787  
788  
789  
790  
791  
792  
793  
794  
795  
796  
797  
798  
799  
800  
801  
802  
803  
804  
805  
806  
807  
808  
809  
810  
811  
812  
813  
814  
815  
816  
817  
818  
819  
820  
821  
822  
823  
824  
825  
826  
827  
828  
829  
830  
831  
832  
833  
834  
835  
836  
837  
838  
839  
840  
84

SOMMET BLANC - ABC  
DEER VALLEY, UTAH

01/07/2025	ASI-006
7/26/2024	ASI-002
date	by

## POWER A & B FUEL SECTIONS AND DETAILS

## S6.01

