



- 1. DIMENSIONS ARE TO FACE OF STUD OF EXTERIOR WALLS, CORRIDOR WALLS & INTERIOR WALLS.
- 2. DIMENSIONS ARE TO CENTERLINE OF DEMISING WALLS.
- 3. ALL EXTERIOR FINISHES SHALL BE TYPE AB08 AND TYPE AB09 FOR FULL EXTENT OF FINE RATED WALLS.
- 4. AT 4' TRIMMED EXTERIOR WALLS, FRAMING IS TO SET BACK 5" FROM FACE OF CONCRETE FOUNDATION.
- 5. ALL EXTERIOR PARTITIONS ARE TO BE STUD OF SLAB, UNO.
- 6. CASEROCK WORK DIMENSIONS ARE TO FACE OF FINISH UNO.
- 7. SEE SHEETS ADO-10 AND ADO-11 FOR ASSEMBLIES.
- 8. INTERIOR WALLS ARE TYPE AE.
- 9. ALL DEMISING WALLS ARE TYPE J&U.
- 10. INTERIOR PARTITIONS ARE TYPE AE.
- 11. ALL FLUERING AIRBORNE CARRIER STRUCTURAL COLUMNS TYPE Q&I.
- 12. ALL SHIRT WALLS ARE TYPE AE.
- 13. REFER TO SHEET SAFETY PLAN ADO-3A FOR FULL EXTENT OF FIRE RATED WALLS.
- 14. ALL CONCRETE WORK SHALL INCLUDE REINFORCING.
- 15. ALL OWNER PARKING STALLS SHALL INCLUDE EVSE INFRASTRUCTURE.
- 16. REFER TO SHEET ADO-18 FOR ACCESSIBILITY REQUIREMENTS.
- 17. REFER TO SHEET ADO-17 FOR ACCESSIBILITY REQUIREMENTS.
- 18. REFER TO SHEET ADO-16 FOR ADA PUBLIC SPACE ACCESSIBILITY REQUIREMENTS.
- 19. ALL MECHANICAL EQUIPMENT LOCATED WITHIN LEVATORMECHANICAL EQUIPMENT ROOM(S).



SOMMET BLANC  
9300 MARSAC AVE  
PARK CITY, UT 84060

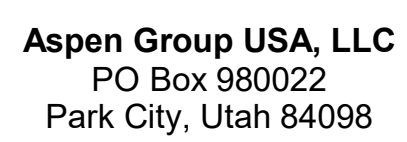

**MEP Engineer**  
**WSP USA**  
1001 Fourth Ave., Suite 3100  
Seattle, WA 98154

no.	date	by
-----	------	----

A2.2C.16

