


PLAN GENERAL NOTES

1. DIMENSIONS ARE TO FACE OF STUD OF EXTERIOR WALLS, CORRIDOR WALLS & INTERIOR WALLS, UNO.
2. DIMENSIONS ARE TO CENTERLINE OF DEMISING WALLS, UNO.
3. ALL EXPOSED STRUCTURAL STEEL TO RECEIVE 1" HATCH IMPREGMENT PAINTING, UNO.
4. AT FRAMED EXTERIOR WALLS, FRAMING TO BE SET BACK 108" FROM FACE OF CONCRETE TO ALLOW FOR FLUSH ALIGNMENT OF SHEATHING TO EDGES OF SLAB, UNO.
5. CASEWORK DIMENSIONS ARE TO FACE OF FINISH, UNO.
6. SEE SHEETS A0.10 AND A0.11 FOR ASSEMBLIES.
7. ALL CORRIDOR WALLS ARE TYPE E6, UNO.
8. ALL DEMISING WALLS ARE TYPE 46, UNO.
9. ALL INTERIOR PARTITIONS ARE TYPE 46, UNO.
10. ALL FURRING AROUND CONCRETE STRUCTURAL COLUMNS TYPE 61, UNO.
11. ALL VENT SHAFT WALLS ARE TYPE K4, UNO.
12. REFER TO LIFE SAFETY PLANS A0.31 - A0.34 FOR FULL EXIST OF FIRE RATED WALLS.
13. UNIT PLAN LAYOUTS ON SHEETS A2.04 - A2.09.
14. ALL OWNER PARKING STALLS SHALL INCLUDE EV INFRASTRUCTURE.
15. REFER TO SHEET A0.08 FOR ANS TYPE A ACCESSIBILITY REQUIREMENTS.
16. REFER TO SHEET A0.07 FOR ANS TYPE A ACCESSIBILITY REQUIREMENTS.
17. REFER TO SHEET A0.08 FOR ADA COMPLIANCE ACCESSIBILITY REQUIREMENTS.
18. MECHANICAL EQUIPMENT LOCATED WITH ELEVATOR MECHANICAL EQUIPMENT ENCLOSURE.
19. CONTRACTOR TO COORDINATE WITH FIREPLACE MANUFACTURER GUIDELINES FOR VENTING

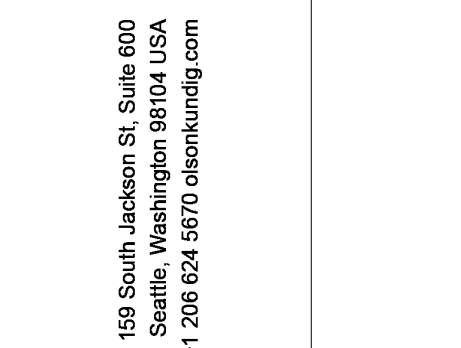

 **ASPEN GRO**
Aspen Group USA, LLC
PO Box 980022
Park City, Utah 84098

WSP USA
1001 Fourth Ave., Suite 3100
Seattle, WA 98154

UNIT PLAN - TOWER
AB-UNIT F ALT