



- 1. DIMENSIONS ARE TO FACE OF STUD OF EXTERIOR WALLS, CORRIDOR WALLS & INTERIOR WALLS, UNO 2. DIMENSIONS ARE TO CENTERLINE OF DEMISING WALLS, UNO. 3. ALL EXPOSED STRUCTURAL STEEL TO RECEIVE 1 HR INTUMESCENT PAINTING, UNO. 4. AT FRAMED EXTERIOR WALLS, FRAMING TO BE SET BACK 5/8" FROM FACE OF CONCRETE TO ALLOW FOR FLUSH ALIGNMENT OF SHEATHING TO EDGE OF SLAB, UNO.
- 5. CASEWORK DIMENSIONS ARE TO FACE OF FINISH, UNO. 6. SEE SHEETS A0.10 AND A0.11 FOR ASSEMBLIES.
- 7. ALL CORRIDOR WALLS ARE TYPE **E6**, UNO. 8. ALL DEMISING WALLS ARE TYPE **J6**, UNO.
- 9. ALL INTERIOR PARTITIONS ARE TYPE A6, UNO. 10. ALL FURRING AROUND CONCRETE STRUCTURAL COLUMNS TYPE **G1**, UNO.
- 11. ALL VENT SHAFT WALLS ARE TYPE K4, UNO. 12. REFER TO LIFE SAFETY PLANS A0.30 - A0.34 FOR FULL EXTENT OF FIRE RATED WALLS.
- 13. UNIT PLAN LAYOUTS ON SHEETS A2.4A A2.4R 14. ALL OWNER PARKING STALLS SHALL INCLUDE EV INFRASTURCTURE.
- 15. REFER TO SHEET A0.08 FOR ANSI TYPE B ACCESSIBILITY REQUIREMENTS. 16. REFER TO SHEET A0.07 FOR ANSI TYPE A ACCESSIBILITY REQUIREMENTS.

<u>+</u> + (23 )

-(22)

-21

- 20

-(19)

-( 18 )

-(17)

-( 16 )


-(15)


- <del>\</del>\_\_\_\_

**∠**↓<del>↓</del>⊢

-

17. REFER TO SHEET A0.06 FOR ADA PUBLIC SPACE ACCESSIBILITY REQUIREMENTS. 18. ALL MECHANICAL EQUIPMENT LOCATED WITHIN ELEVATOR/MECHANICAL EQUIPMENT ENCLOSURE. 19. CONTRACTOR TO COORDINATE WITH FIREPLACE MANUFACTURER GUIDELINES FOR VENTING

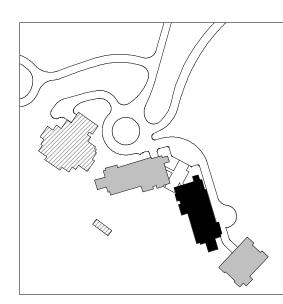

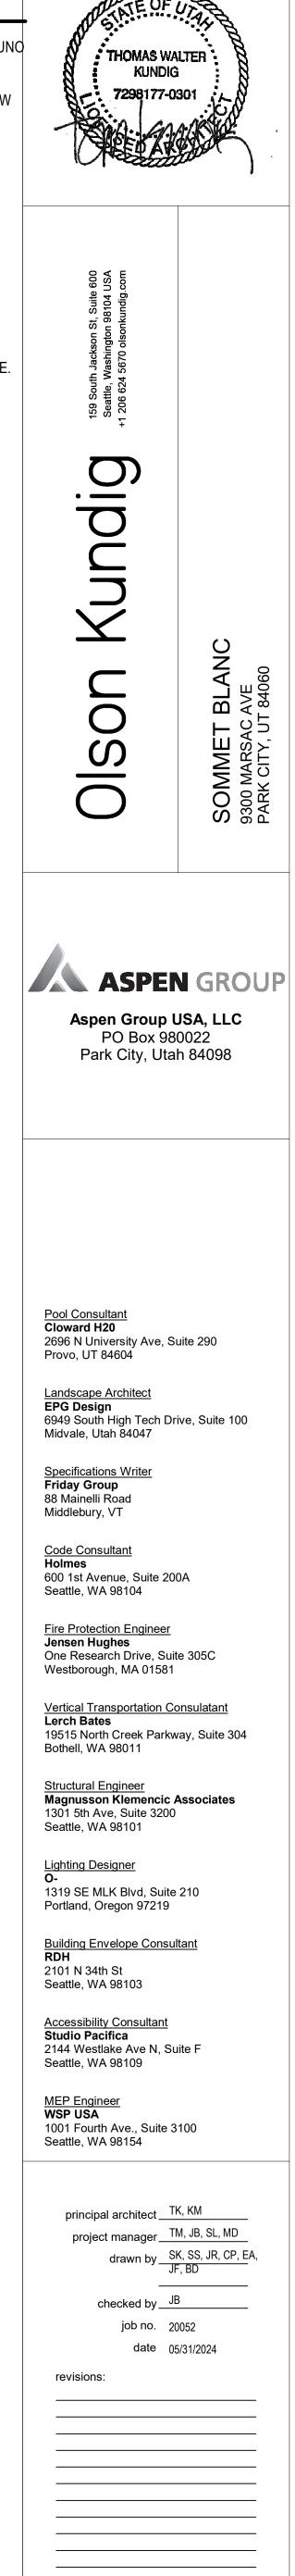

0 2' 4' 6' 8' 16' 24'

PLAN - TOWER B - LVL 2 A2.2B.12

\_\_\_\_\_

no. date

 T
 06/13/25
 ASI-015

 O
 04/07/25
 ASI 010

N 04/07/25 ASI 009

IFC SET 3 OF 3

05/31/2024

by