



## S2.01



## S2.02



served for permit stamp

Seattle, Washington 98104 USA  
+1 206 624 5670 [olsonkundig.com](mailto:olsonkundig.com)

Olson Kundig

**SOMMET BLANC - ABC**  
DEER VALLEY, UTAH

MAGNUSSON  
KLEMENCIC  
ASSOCIATES

**Structural + Civil Engineers**  
Seattle Chicago  
www.mika.com  
206 292 1200

principal architect \_\_\_\_\_  
 project manager \_\_\_\_\_  
 drawn by \_\_\_\_\_  
 \_\_\_\_\_ Author  
 checked by \_\_\_\_\_ Checker  
 job no. 20052  
 date 11/18/2022

visions:

11/18/2022	IFC
date	by

CONSTRUCTION  
DOCUMENTS

1/18/2022


POWER A LEVEL 1 &  
POWER B LEVEL P1  
COMPOSITE  
FRAMING PLAN

## S2.11







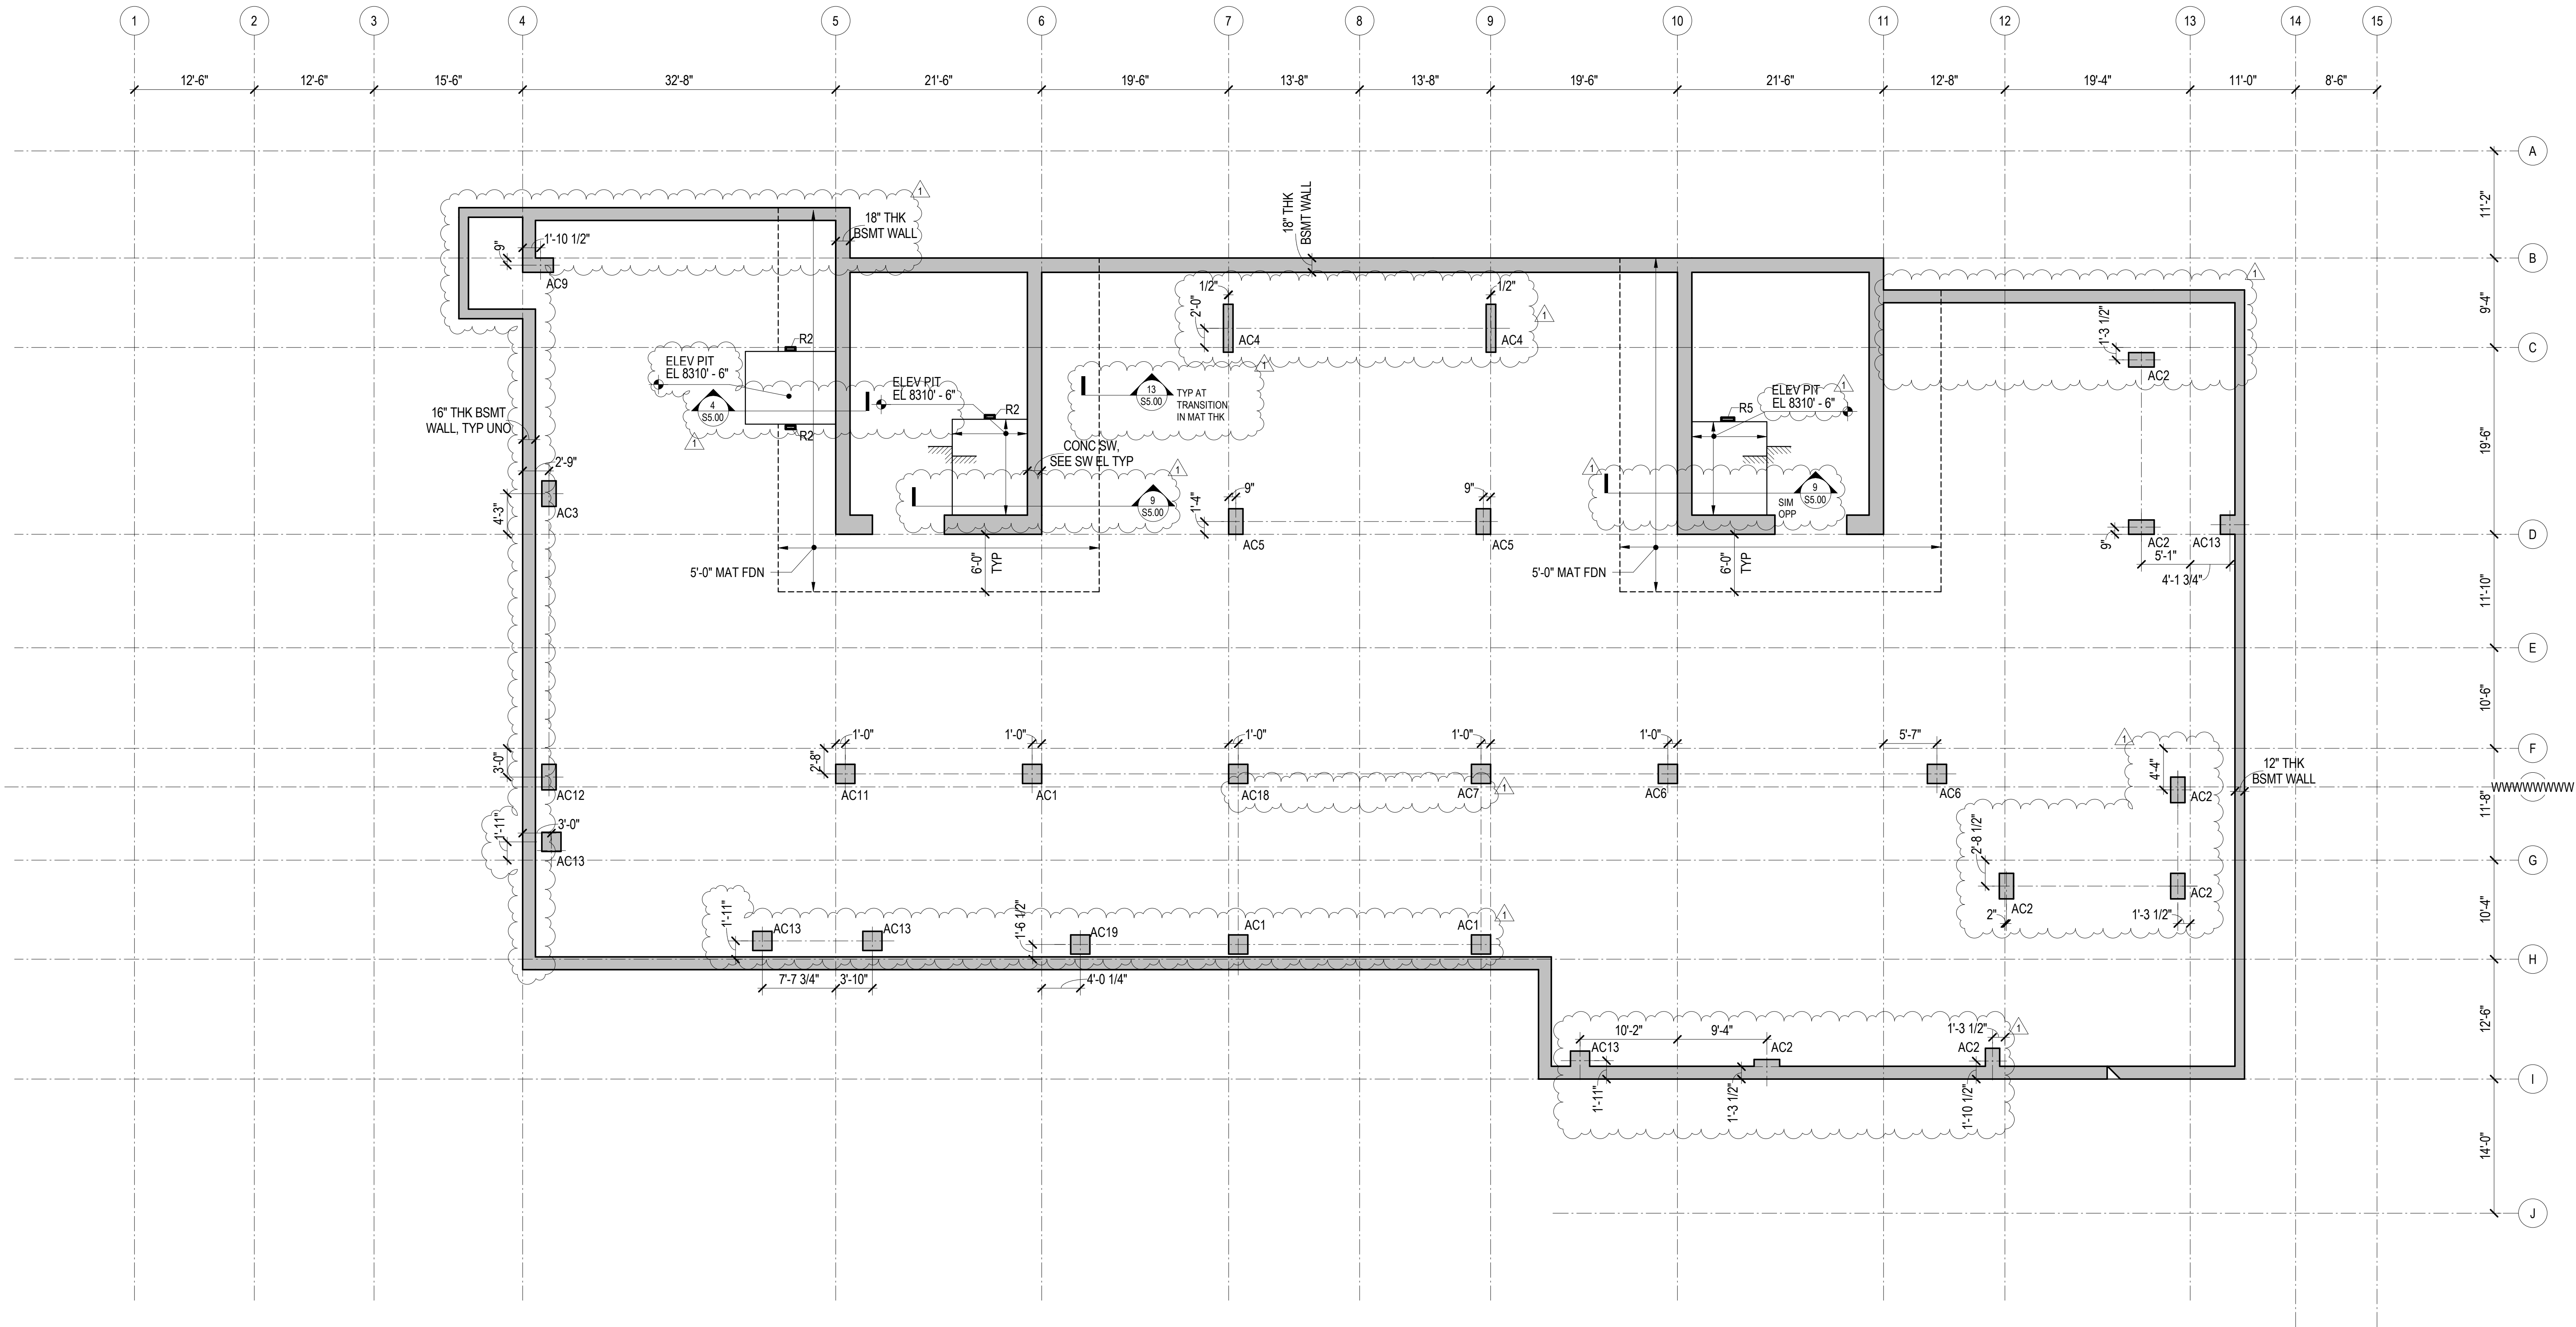

1 TOWER A - LEVEL B1 FRAMING PLAN  
1/8" = 1'-0"




REFERENCE DRAWINGS

- S0.XX DRAWING INDEX, ABBREVIATIONS, LEGENDS, GENERAL NOTES
- S1.XX LOAD DIAGRAMS
- S2.XX PLANS
- S3.XX ELEVATIONS
- S4.XX TYPICAL DETAILS AND SCHEDULES
- S5.XX CONCRETE SECTIONS AND DETAILS
- S6.XX STEEL SECTIONS AND DETAILS

NOTES

- REFERENCE ELEVATION IS 8314' - 1". TOP OF MAT IS AT THE REFERENCE ELEVATION UNLESS NOTED OTHERWISE. SEE ARCHITECTURAL PLANS FOR DIMENSIONS OF ALL SLAB EDGES, OPENINGS, SLOPES, AND DEPRESSIONS NOT DEFINED ON THE STRUCTURAL PLANS.
- MAT FOUNDATION IS 3'-0" THICK UNLESS NOTED OTHERWISE. UPON REACHING THE MAT FOUNDATION SUBGRADE ELEVATION, SOIL CONDITIONS SHALL BE EVALUATED AND APPROVED BY THE GEOTECHNICAL ENGINEER OF RECORD.
- SHEAR WALL OPENINGS, WALL ENDS, AND WALL LOCATIONS ARE DIMENSIONED RELATIVE TO GRID LINES ON THE SHEAR WALL ELEVATION.
- BASEMENT WALLS SHALL BE RESTRAINED AT EACH FLOOR BY THE STRUCTURAL SLAB AND AT THE BOTTOM OF THE MAT, AND SHALL HAVE REACHED DESIGN STRENGTH PRIOR TO PLACING BACKFILL AND/OR DE-TENSIONING TIE-BACK ANCHORS.
- BASEMENT WALLS ARE DESIGNED FOR A FULLY DRAINED CONDITION IN THE RETAINED SOIL.
- BASEMENT WALL REINFORCEMENT IS SHOWN ON THE BASEMENT WALL ELEVATIONS.
- THE STRUCTURAL SLAB IS A 10-INCH THICK MILD TWO-WAY SLAB UNLESS NOTED OTHERWISE. SEE THE TYPICAL MILD SLAB DETAILS.

- CONCRETE PLACED IN THE SLAB/SHEAR WALL INTERSECTION, INCLUDING COUPLING BEAMS, SHALL HAVE MINIMUM CONCRETE STRENGTH EQUAL TO THAT SPECIFIED FOR THE SHEAR WALLS.
- CONCRETE PLACED IN THE SLAB/COLUMN INTERSECTION SHALL HAVE MINIMUM CONCRETE STRENGTH AS SHOWN IN THE GENERAL NOTES, BUT NO LESS THAN THAT SPECIFIED FOR THE COLUMNS DIVIDED BY 1.4.
- COORDINATE LOCATION OF ALL EMBEDS WITH MECHANICAL, ELECTRICAL, AND PLUMBING DRAWINGS PRIOR TO CASTING FOUNDATIONS.
- REFERENCE ALL CONSTRUCTION DOCUMENTS FOR SIZE, EXTENT, AND LOCATION OF CONCRETE CURBS, HOUSEKEEPING PADS, CMU WALLS, PLANTER WALLS, BOLLARDS, EDGE ANGLES, AND SLAB PENETRATIONS. PROVIDE DOCK LEVELER, ELEVATOR PITS, ESCALATOR PITS, SUMP PITS, MIE/P VALLTS, TRENCH AND AREA DRAINS, AND CONCRETE ENCASEMENTS/EMBEDMENTS/INSERTS/ETC. AS REQUIRED. REINFORCE PER TYPICAL DETAILS.
- SEE ARCHITECTURAL/CIVIL DRAWINGS FOR SIDEWALKS, PAVING, AND SITE DETAILS AT BUILDING EXTERIOR UNLESS NOTED OTHERWISE.
- INDICATES TYPICAL BUILT-UP SLAB ON RIGID FOAM. SEE ARCHITECTURAL DRAWINGS FOR LOCATIONS AND ELEVATIONS OF ARCHITECTURAL BUILT-UP SLABS. SEE TYPICAL BUILT-UP SLAB DETAIL FOR ADDITIONAL INFORMATION.

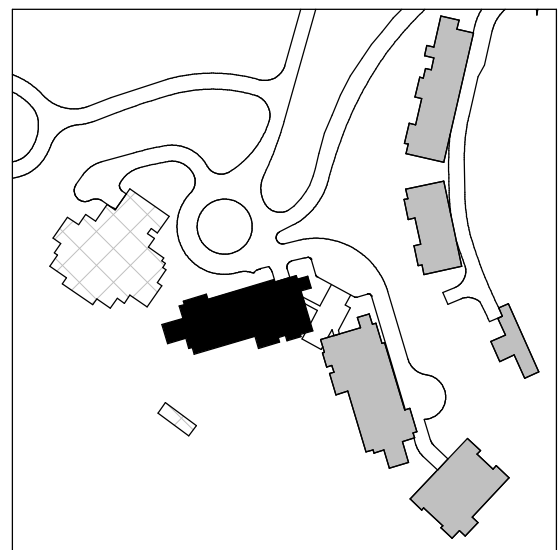

Reserved for permit stamp

159 South Jackson St. Suite 800  
Seattle, Washington 98104 USA  
+1 206 624 5970 olsonkundig.com

Olson Kundig

project:  
SOMMET BLANC - ABC  
DEER VALLEY, UTAH

MAGNUSSON  
KLEMENCIC  
ASSOCIATES

Structural + Civil Engineers

Seattle Chicago  
www.mka.com  
206.292.1200

principal architect \_\_\_\_\_  
project manager \_\_\_\_\_  
drawn by \_\_\_\_\_  
Author \_\_\_\_\_  
checked by JB \_\_\_\_\_  
job no. 20052 \_\_\_\_\_  
date 11/18/2022 \_\_\_\_\_  
revisions: \_\_\_\_\_  
1 11/18/2022 IFC \_\_\_\_\_  
no. date by \_\_\_\_\_

CONSTRUCTION  
DOCUMENTS

11/18/2022

TOWER A LEVEL B1  
FRAMING PLAN

S2.A.01

S2.A.01.B





159 South Jackson St, Suite 600  
Seattle, Washington 98104 USA  
+1 206 624 5670 [olsonkundig.com](mailto:olsonkundig.com)

**SOMMET BLANC - ABC**  
DEER VALLEY, UTAH


Little Chicago  
www.mika.com  
06 292 1200

[illegible]

CONSTRUCTION  
DOCUMENTS  
11/18/2022

TOWER A LEVEL B1  
SHEAR  
REINFORCING  
PLAN

S2.A.01.V


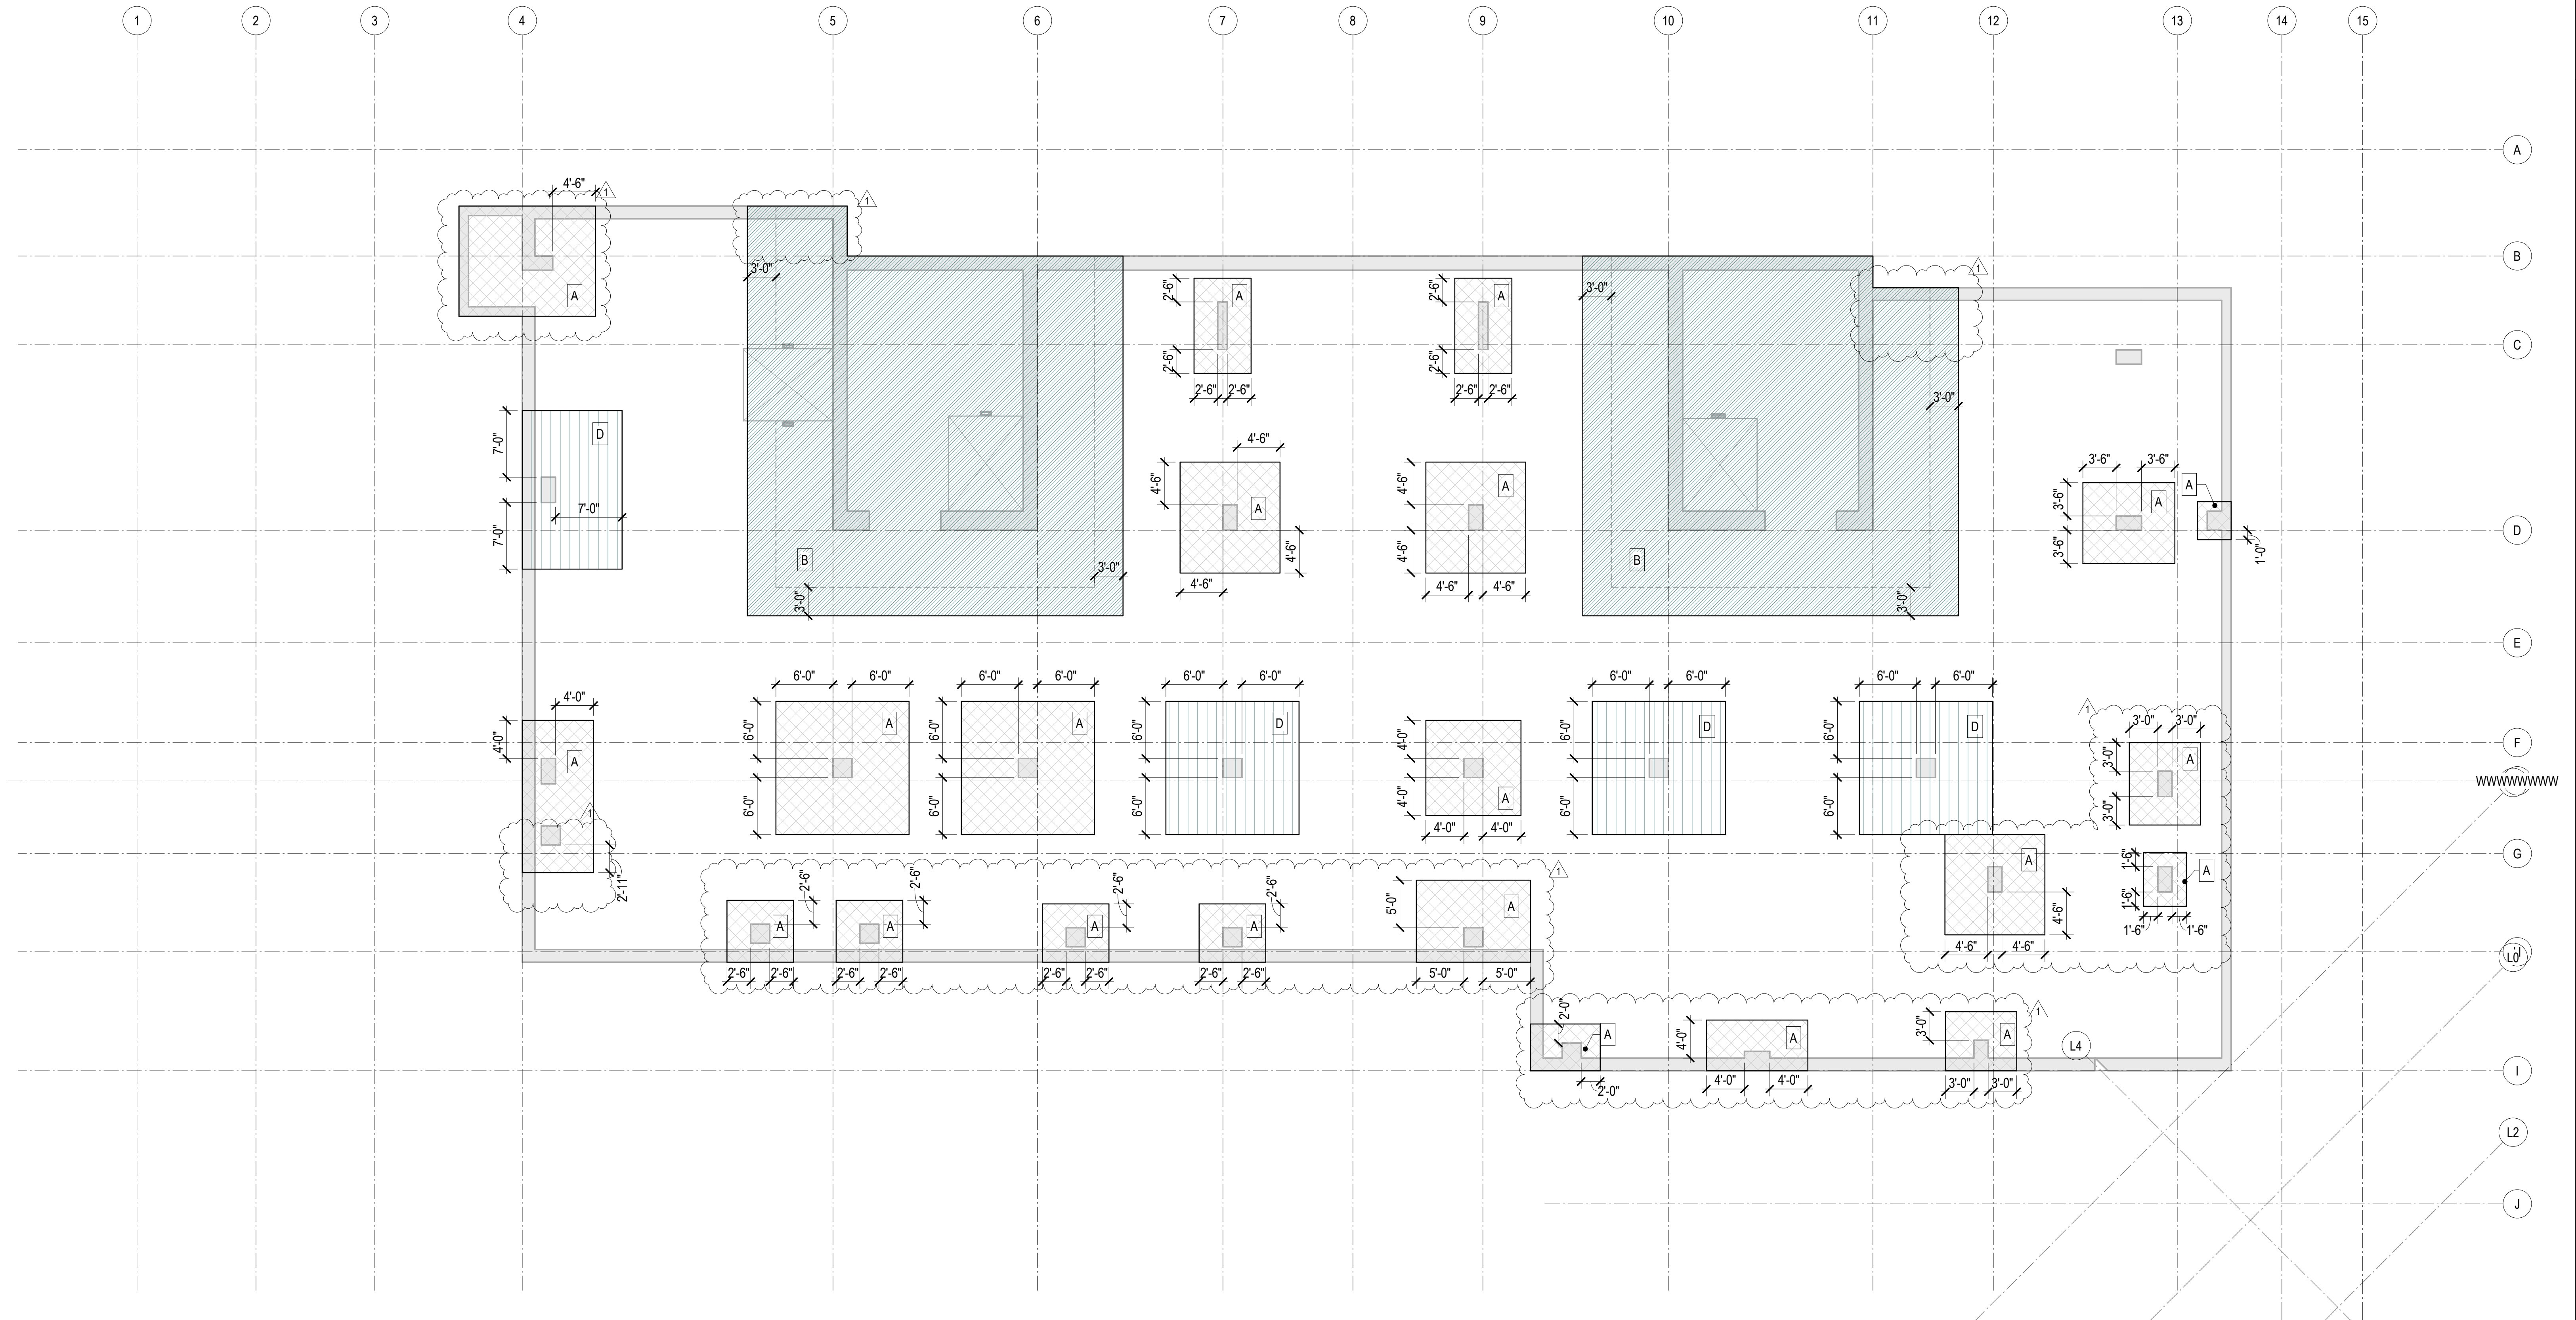


1 TOWER A - LEVEL B1 - SHEAR REINFORCEMENT PLAN

**MAT FOUNDATION REINFORCING NOTES:**

1. SEE THE "GENERAL NOTES" FOR GENERAL REINFORCING REQUIREMENTS.
2. SEE MAT REINFORCEMENT PLACEMENT DIAGRAM FOR LAYER AND DIRECTION KEY FOR MAT REINFORCEMENT PLACEMENT.
3. HOOK OR PROVIDE TERMINATORS AT ALL #11 BARS OR SMALLER AND PROVIDE TERMINATORS AT ALL #14 AND #18 BARS INTERRUPTED AT PITS AND OPENINGS.
4. PLACE BARS ON LAYER 1, UNLESS NOTED OTHERWISE.
5. ALL TOP AND BOTTOM REINFORCEMENT SHOWN ON MAT REINFORCEMENT PLANS SHALL BE GRADE 60 KSI.
6. VERTICAL REINFORCEMENT SHOWN ON MAT REINFORCEMENT PLANS SHALL BE GRADE 60 KSI.

FOUNDATION VERTICAL REINFORCING SCHEDULE		
TYPE	REINFORCING	REMARKS
A	#7 @ 24" EACH WAY	
B	#8 @ 24" EACH WAY	
C	#9 @ 24" EACH WAY	
D	#7 @ 24" EACH WAY	

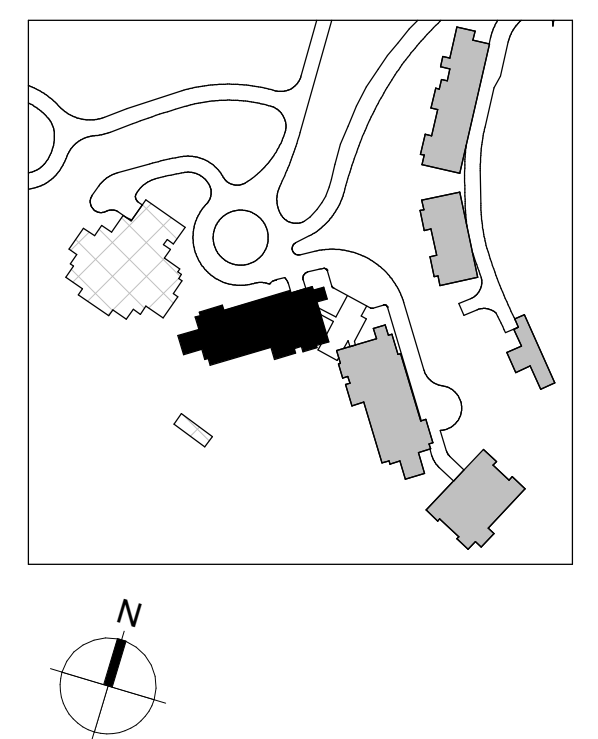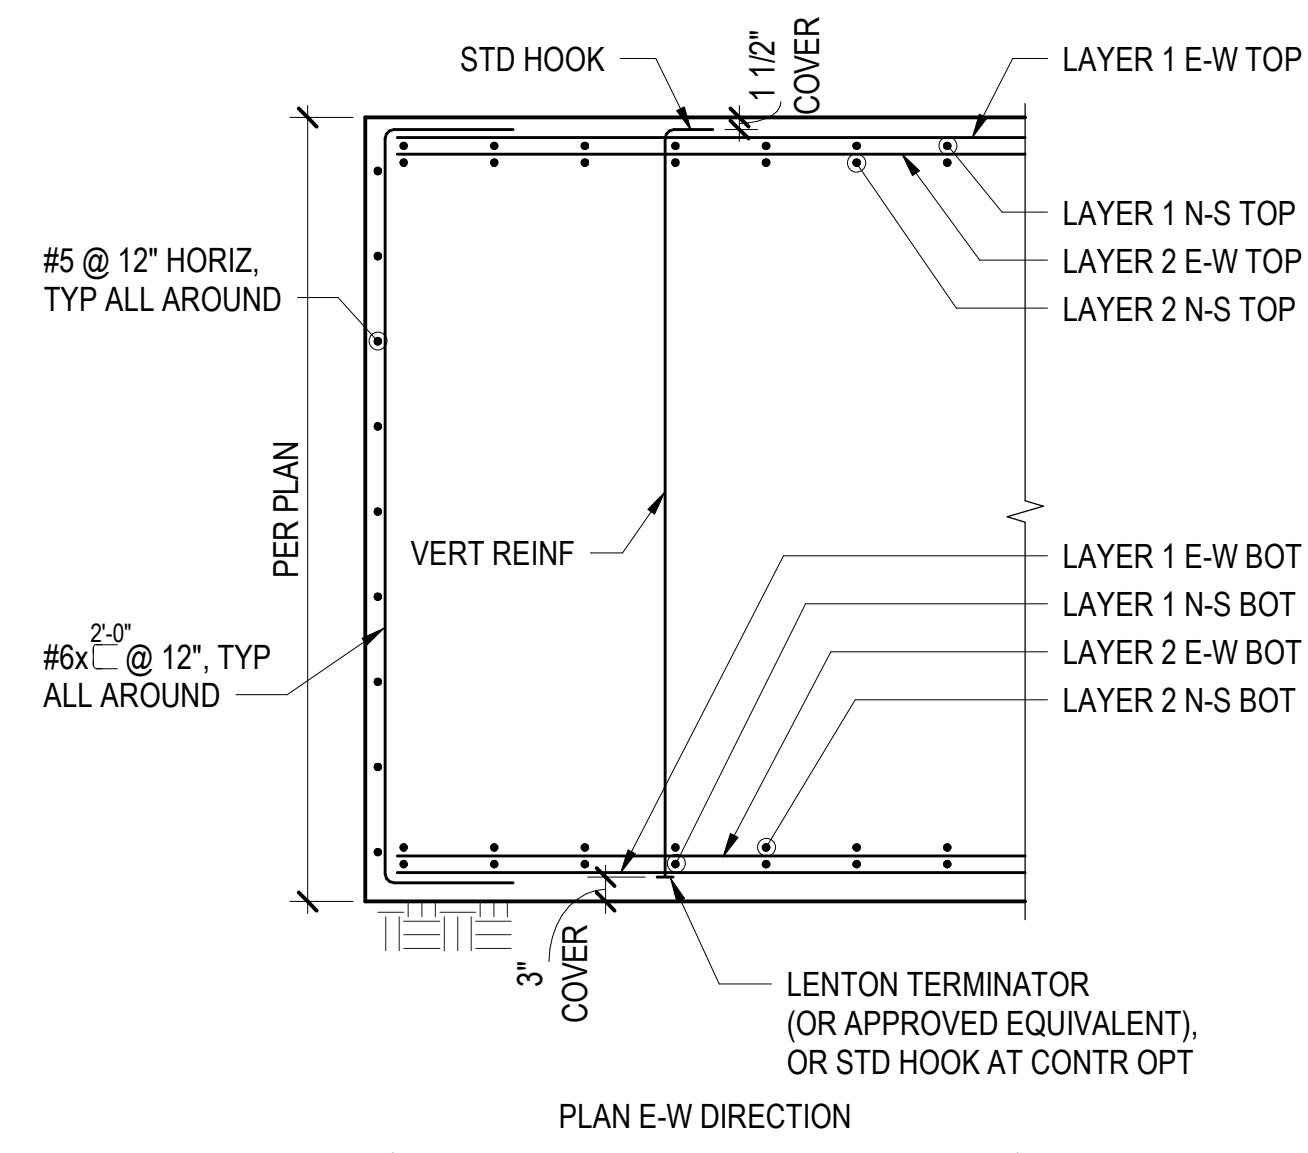





159 South Jackson St, Suite 600  
Seattle, Washington 98104 USA  
+1 206 624 5670 [olsonkundig.com](mailto:olsonkundig.com)

SOMMET BLANC - ABC  
DEER VALLEY, UTAH



Little Chicago  
www.mika.com  
06 292 1200

isions:

11/18/2022	IFC
date	by


/18/2022

S2.A.02

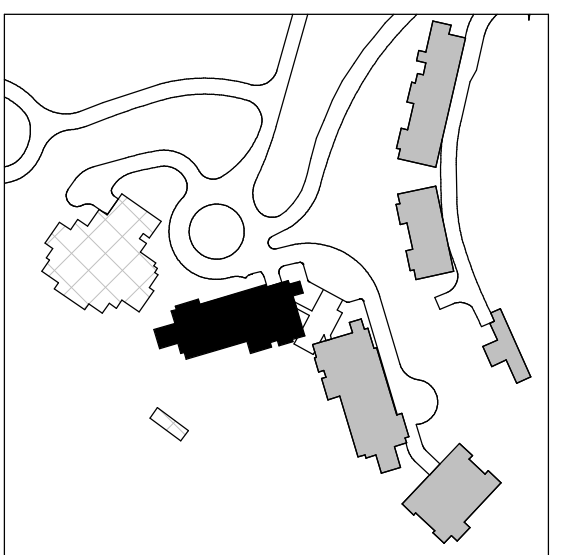
$$\frac{1}{8}'' = 1'-0''$$

S0.XX	DRAWING INDEX, ABBREVIATIONS, LEGENDS, GENERAL NOTES
S1.XX	LOAD DIAGRAMS
S2.XX	PLANS
S3.XX	ELEVATIONS
S4.XX	TYPICAL DETAILS AND SCHEDULES
S5.XX	CONCRETE SECTIONS AND DETAILS
S6.XX	STEEL SECTIONS AND DETAILS

1. REFERENCE FLOOR ELEVATION IS 8333' - 0" TOP OF CONCRETE SLAB IS AT THE REFERENCE ELEVATION UNLESS NOTED OTHERWISE. SEE ARCHITECTURAL DRAWINGS FOR DRAINAGE SLOPES NOT SHOWN.
2. MAT FOUNDATION IS 2'-0" THICK UNLESS NOTED OTHERWISE. UPON REACHING THE MAT FOUNDATION SUBGRADE ELEVATION, SOIL CONDITIONS SHALL BE EVALUATED AND APPROVED BY THE GEOTECHNICAL ENGINEER OF RECORD.
3. THE STRUCTURAL SLAB IS A 10-INCH THICK MILD TWO-WAY SLAB UNLESS NOTED OTHERWISE. SEE THE TYPICAL MILD SLAB DETAILS.
4. CONCRETE PLACED IN THE SLAB/SHEAR WALL INTERSECTION, INCLUDING COUPLING BEAMS, SHALL HAVE MINIMUM CONCRETE STRENGTH EQUAL TO THAT SPECIFIED FOR THE SHEAR WALLS.
5. CONCRETE PLACED IN THE SLAB/COLUMN INTERSECTION SHALL HAVE MINIMUM CONCRETE STRENGTH AS SHOWN IN THE GENERAL NOTES, BUT NO LESS THAN THAT SPECIFIED FOR THE COLUMNS DIVIDED BY 1.4.
6. COORDINATE LOCATION OF ALL EMBEDS WITH MECHANICAL, ELECTRICAL, PLUMBING, AND EXTERIOR WALL SYSTEMS PRIOR TO CASTING THE SLAB.

7. SEE ARCHITECTURAL, MECHANICAL, PLUMBING, ELECTRICAL, AND OTHER DISCIPLINES DRAWINGS FOR OPENING SIZES AND LOCATIONS NOT SHOWN ON PLAN. SEE "TYPICAL OPENINGS AND EMBEDMENTS IN CONCRETE" DETAILS FOR OPENING PLACEMENT CRITERIA. NOTIFY THE STRUCTURAL ENGINEER OF ANY OPENINGS NOT SHOWN ON THE STRUCTURAL DRAWINGS FOR WHICH THE TYPICAL DETAILS DO NOT APPLY.
8. REFERENCE ALL CONSTRUCTION DOCUMENTS FOR SIZE, EXTENT, AND LOCATION OF CONCRETE CURBS, HOUSEKEEPING PADS, CMU KICKS, PLANTER WALLS, BOLLARDS, AND EDGE ANGLES. REINFORCE PER THE TYPICAL DETAIL.
9.  INDICATES TYPICAL BUILT-UP SLAB ON RIGID FOAM. SEE ARCHITECTURAL DRAWINGS FOR LOCATIONS AND ELEVATIONS OF ARCHITECTURAL BUILT-UP SLABS. SEE TYPICAL BUILT-UP SLAB DETAIL FOR ADDITIONAL INFORMATION.









159 South Jackson St, Suite 600  
Seattle, Washington 98104 USA  
+1 206 624 5670 [olsonkundig.com](mailto:olsonkundig.com)

SOMMET BLANC - ABC  
DEER VALLEY, UTAH


Little Chicago  
www.mika.com  
06 292 1200

isions:

11/18/2022


/18/2022

S2.A.11

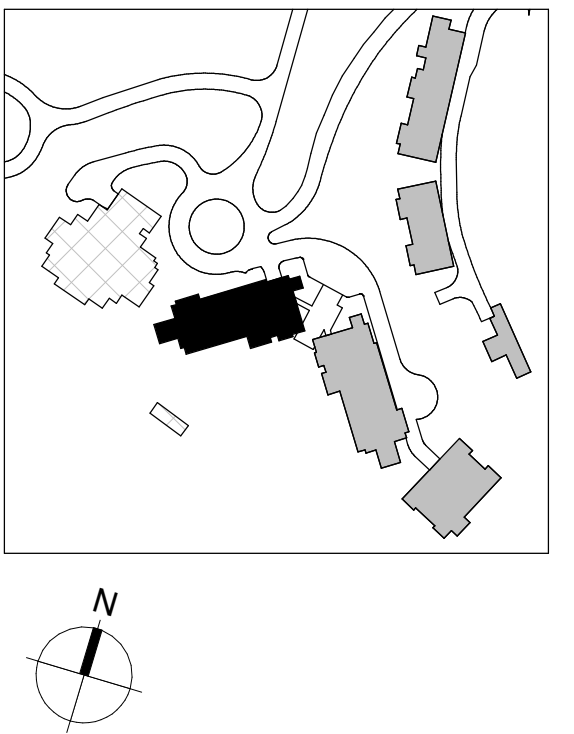
$$1/8'' = 1' - 0''$$


S0.XX	DRAWING INDEX, ABBREVIATIONS, LEGENDS, GENERAL NOTES
S1.XX	LOAD DIAGRAMS
S2.XX	PLANS
S3.XX	ELEVATIONS
S4.XX	TYPICAL DETAILS AND SCHEDULES
S5.XX	CONCRETE SECTIONS AND DETAILS
S6.XX	STEEL SECTIONS AND DETAILS

1. REFERENCE FLOOR ELEVATION IS 8345' - 0". TOP OF STRUCTURAL CONCRETE SLAB IS 8344' - 11" UNLESS NOTED OTHERWISE. SEE ARCHITECTURAL DRAWINGS FOR DRAINAGE SLOPES NOT SHOWN.
2. THE STRUCTURAL SLAB IS A 14-INCH THICK MILD TWO-WAY SLAB UNLESS NOTED OTHERWISE. SEE THE TYPICAL MILD SLAB DETAILS.
3. CONCRETE PLACED IN THE SLAB/SHEAR WALL INTERSECTION, INCLUDING COUPLING BEAMS, SHALL HAVE MINIMUM CONCRETE STRENGTH EQUAL TO THAT SPECIFIED FOR THE SHEAR WALLS.
4. CONCRETE PLACED IN THE SLAB/COLUMN INTERSECTION SHALL HAVE MINIMUM CONCRETE STRENGTH AS SHOWN IN THE GENERAL NOTES, BUT NO LESS THAN THAT SPECIFIED FOR THE COLUMNS DIVIDED BY 1.4.
5. COORDINATE LOCATION OF ALL EMBEDS WITH MECHANICAL, ELECTRICAL, PLUMBING, AND EXTERIOR WALL SYSTEMS PRIOR TO CASTING THE SLAB.
6. SEE ARCHITECTURAL, MECHANICAL, PLUMBING, ELECTRICAL, AND OTHER DISCIPLINES DRAWINGS FOR OPENINGS SIZES AND LOCATIONS NOT SHOWN ON PLAN. SEE "TYPICAL OPENINGS AND EMBEDMENTS IN CONCRETE" DETAILS FOR OPENING PLACEMENT CRITERIA. NOTIFY THE STRUCTURAL ENGINEER OF ANY OPENINGS NOT SHOWN ON THE STRUCTURAL DRAWINGS FOR WHICH THE TYPICAL DETAILS DO NOT APPLY.

7. REFERENCE ALL CONSTRUCTION DOCUMENTS FOR SIZE, EXTENT, AND LOCATION OF CONCRETE CURBS, HOUSEKEEPING PADS, CMU WALLS, PLANTER WALLS, BOLLARDS, AND EDGE ANGLES. REINFORCE PER THE TYPICAL DETAILS.
8.  INDICATES TYPICAL BUILT-UP SLAB ON RIGID FOAM. SEE ARCHITECTURAL DRAWINGS FOR LOCATIONS AND ELEVATIONS OF ARCHITECTURAL BUILT-UP SLABS. SEE TYPICAL BUILT-UP SLAB DETAIL FOR ADDITIONAL INFORMATION.

S2.A.11





Reserved for permit stamp


150 South Jackson St., Suite 800  
Seattle, Washington 98104 USA  
+1 206 624 5870 olsonkundig.com

Olson Kundig

project:  
SOMMET BLANC - ABC  
DEER VALLEY, UTAH

MAGNUSSON  
KLEMENCIC  
ASSOCIATES

Structural + Civil Engineers  
Seattle, Chicago  
www.mka.com  
206.292.1200

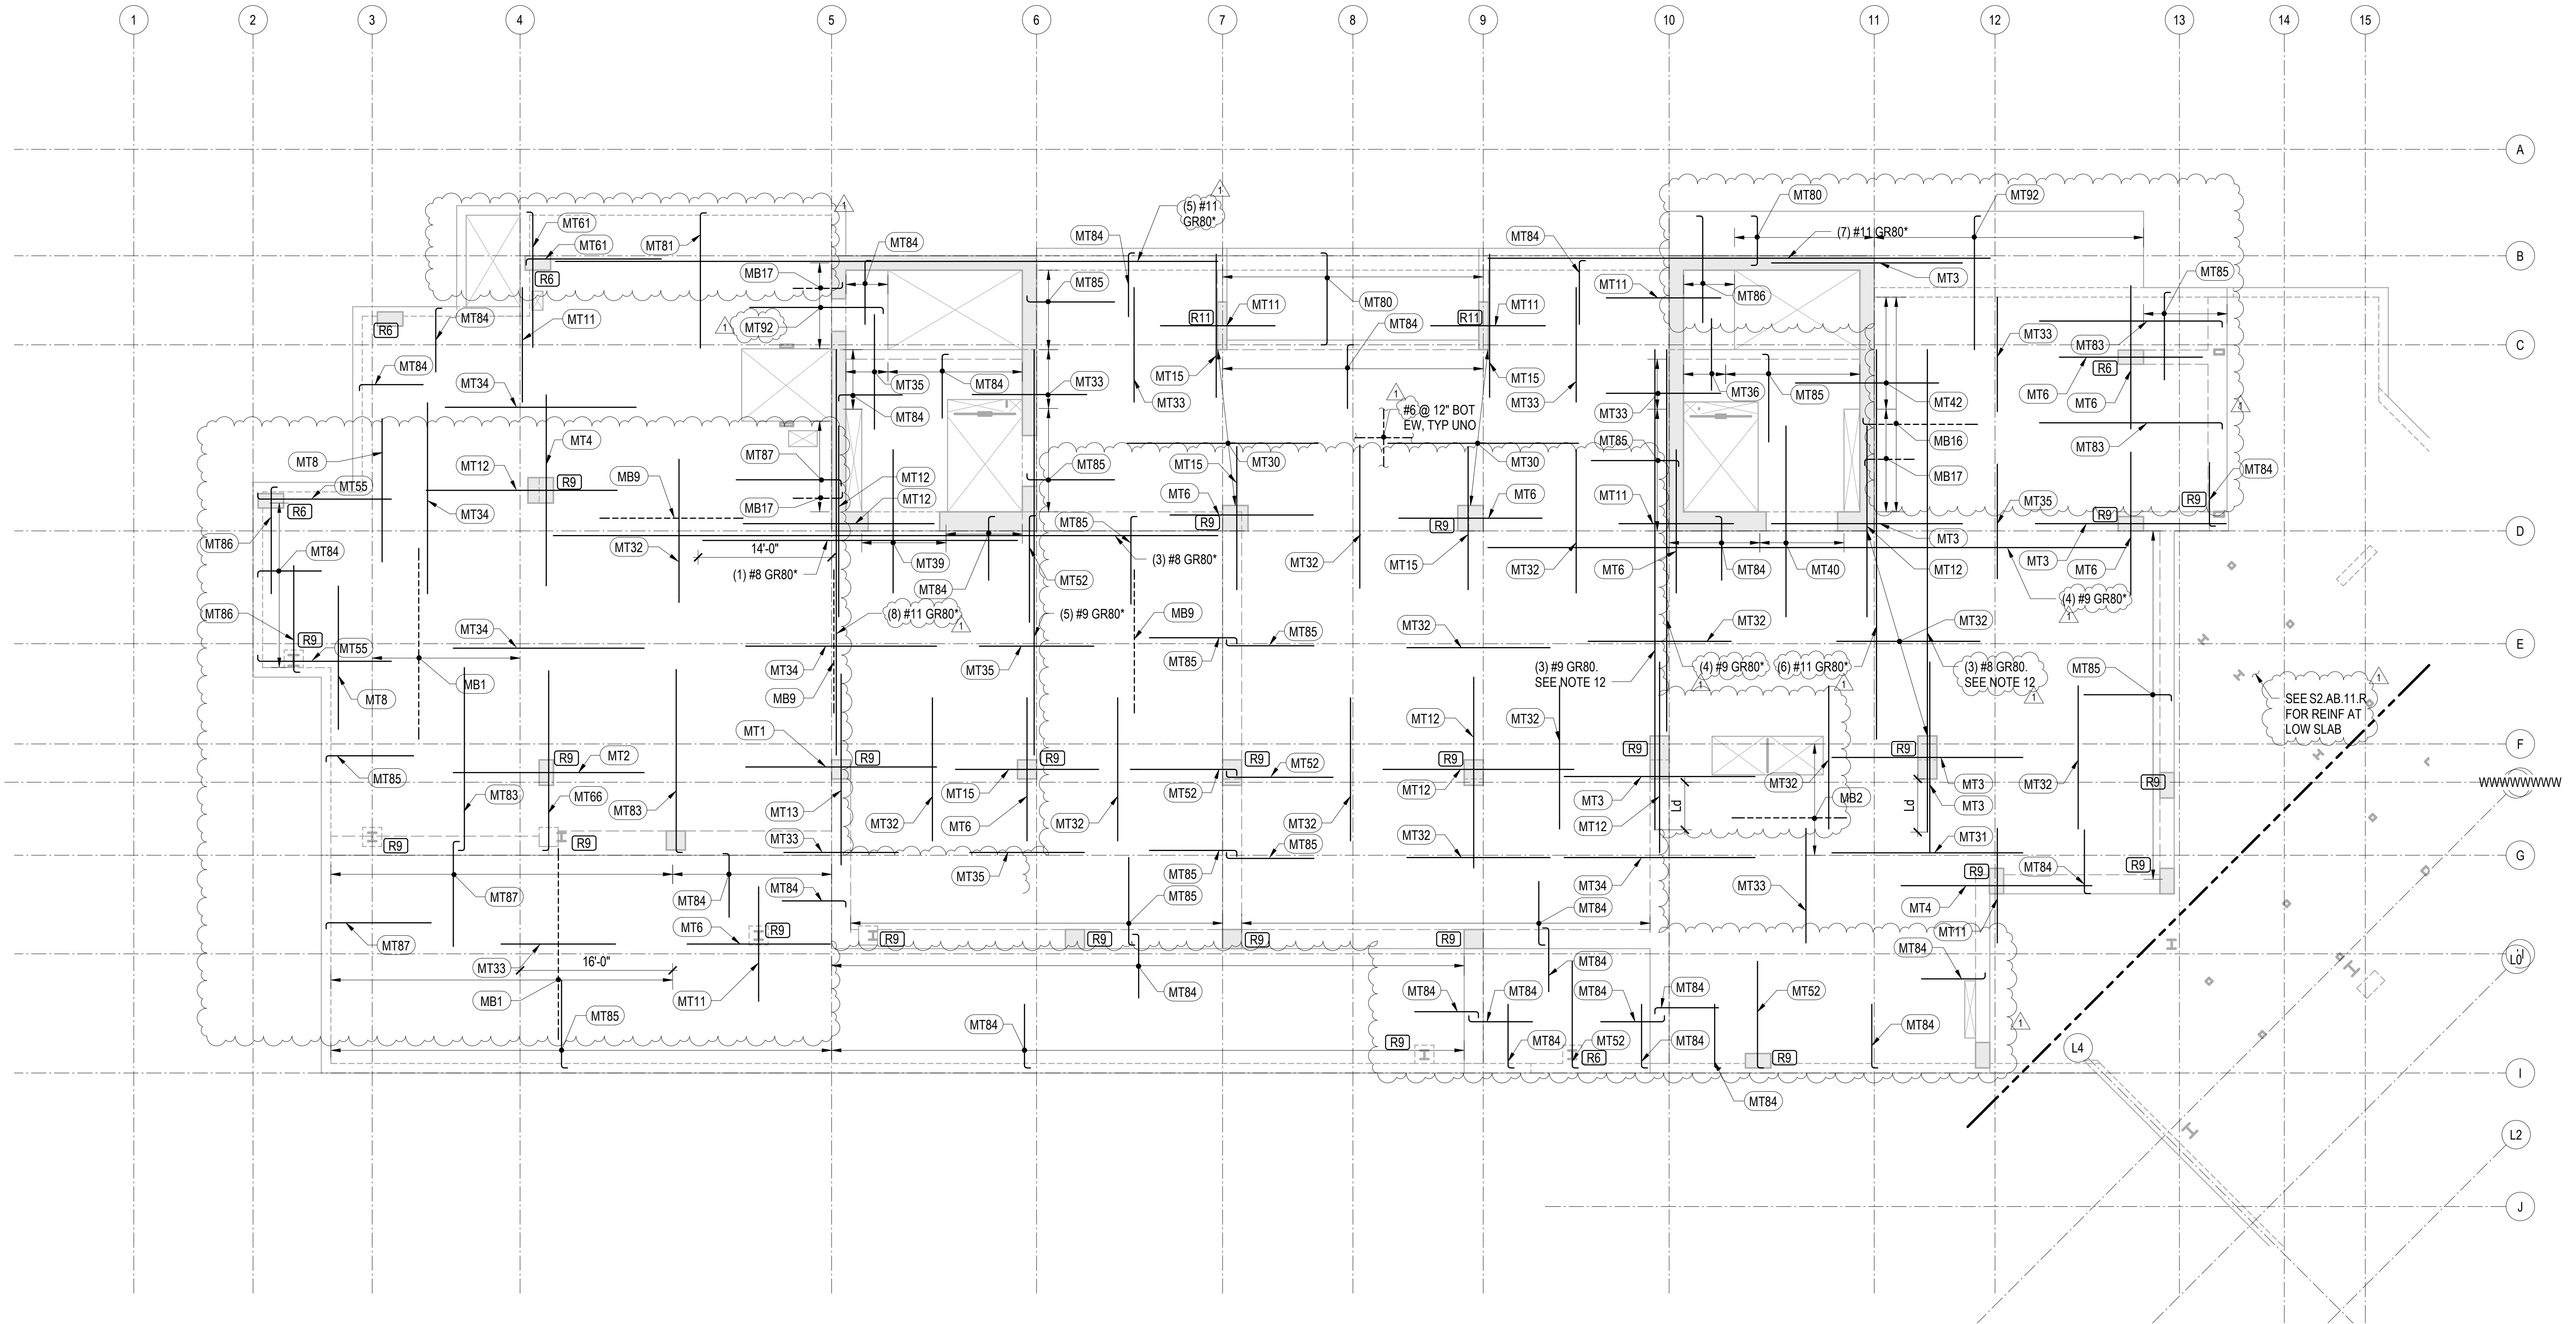

# 1 TOWER A - LEVEL 1 - REINFORCEMENT PLAN

1/8" = 1'-0"

## REINFORCING NOTES:

- SEE "GENERAL NOTES" FOR REINFORCING REQUIREMENTS.
- SEE "TYPICAL MILD SLAB DETAILS" FOR ADDITIONAL INFORMATION.
- SLAB REINFORCING SHALL BE PLACED IN THE FOLLOWING SEQUENCE:  
E-W BOTTOM BARS  
N-S BOTTOM BARS  
N-S TOP BARS  
E-W TOP BARS
- FOR CONTINUOUS BOTTOM BARS, LAP BARS Lsb AS REQUIRED WITH LAPS AT 1/3 THE SLAB SPAN BETWEEN ADJACENT COLUMNS.
- TWO OF THE CONTINUOUS BOTTOM BARS ARE TO BE PLACED EACH WAY THROUGH ALL COLUMNS WITH COLUMN VERTICAL REINFORCEMENT, UNLESS NOTED OTHERWISE.
- BOTTOM BARS CALLED OUT ARE IN ADDITION TO CONTINUOUS BOTTOM MAT.
- [RX] INDICATES STUD RAIL. STUD RAILS SHALL BE PLACED AT ALL COLUMNS. SEE "TYPICAL STUD RAIL REINFORCEMENT AT COLUMNS" DETAIL AND STUD RAIL SCHEDULE.
- SEE "TYPICAL CONCRETE OPENINGS AND EMBEDMENTS" FOR ADDITIONAL REINFORCEMENT REQUIREMENTS. NOTIFY STRUCTURAL ENGINEER OF ANY OPENINGS NOT SHOWN ON THE STRUCTURAL DRAWINGS FOR WHICH THE TYPICAL DETAILS DO NOT APPLY. ADDITIONAL REINFORCEMENT MAY BE REQUIRED.
- WHERE BAR LENGTH CANNOT BE ACHIEVED DUE TO SLAB EDGE, HOOK BAR.
- WHERE NOTED AS "HOOKED", PROVIDE 90 OR 180 DEGREE HOOK AS SHOWN ON PLAN. NOTED BAR LENGTH IS LENGTH OF STRAIGHT PORTION OF BAR.
- \* INDICATES DIAPHRAGM REINFORCEMENT THAT IS PART OF THE LATERAL FORCE RESISTING SYSTEM AND IS IN ADDITION TO OTHER BARS SHOWN. THIS REINFORCEMENT SHALL BE CENTERED IN SLAB MID-DEPTH, UNO. REINFORCEMENT SHALL MEET CENTER-TO-CENTER SPACING OF 3db BUT NOT LESS THAN 3-INCHES, UNLESS NOTED OTHERWISE. LAP Lsb AS REQUIRED, STAGGER LAPS.

12. WHERE NOTE APPLIES, REINFORCEMENT IS DIAPHRAGM REINFORCEMENT THAT IS PART OF THE LATERAL FORCE RESISTING SYSTEM AND IN ADDITION TO OTHER BARS SHOWN. REINFORCEMENT IS TO BE PLACED WITHIN VERTICALS OF COLUMNS AT GRIDS 10F OR 11.4F. REINFORCEMENT SHALL BE CENTERED IN SLAB MID-DEPTH. REINFORCEMENT SHALL MEET CENTER-TO-CENTER SPACING OF 3db BUT NOT LESS THAN 3-INCHES, UNLESS NOTED OTHERWISE. LAP SPLICE IS NOT PERMITTED, PROVIDE MECHANICAL COUPLER IF NECESSARY.


MILD TOP REINFORCEMENT SCHEDULE		
MARK	REINFORCING	REMARKS
MT1	(13) #6x20'-0" @ 10"	STAGGER 6'-0"
MT2	(13) #7x20'-0" @ 10"	STAGGER 5'-0"
MT3	(11) #7x20'-0" @ 12"	STAGGER 4'-0"
MT4	(11) #6x20'-0" @ 12"	STAGGER 4'-0"
MT5	(13) #5x15'-0" @ 10"	STAGGER 4'-0"
MT6	(11) #6x15'-0" @ 12"	STAGGER 4'-0"
MT7	(15) #7x15'-0" @ 9"	STAGGER 3'-0"
MT8	(6) #5x15'-0" @ 12"	STAGGER 3'-0"
MT9	(6) #7x15'-0" @ 12"	STAGGER 3'-0"
MT11	(11) #5x12'-0" @ 12"	STAGGER 2'-0"
MT12	(16) #8x20'-0" @ 8"	STAGGER 5'-0"
MT13	(21) #8x20'-0" @ 6"	STAGGER 5'-0"
MT14	(21) #7x20'-0" @ 6"	STAGGER 5'-0"
MT15	(11) #5x15'-0" @ 12"	STAGGER 3'-0"
MT16	(11) #4x12'-0" @ 12"	STAGGER 2'-0"

MILD TOP REINFORCEMENT SCHEDULE		
MARK	REINFORCING	REMARKS
MT17	(11) #4x15'-0" @ 12"	STAGGER 3'-0"
MT18	(16) #8x20'-0" @ 8"	STAGGER 5'-0"
MT30	#5x20'-0" @ 12"	STAGGER 3'-0"
MT31	#5x20'-0" @ 10"	STAGGER 2'-0"
MT32	#5x15'-0" @ 12"	STAGGER 2'-0"
MT33	#5x12'-0" @ 12"	STAGGER 2'-0"
MT34	#5x20'-0" @ 12"	STAGGER 4'-0"
MT35	#5x12'-0" @ 12"	STAGGER 1'-0"
MT36	#5x7'-6" @ 12"	STAGGER 0'-0"
MT37	#4x12'-0" @ 12"	STAGGER 1'-0"
MT38	#4x15'-0" @ 12"	STAGGER 5'-0"
MT39	#5x15'-0" @ 8"	STAGGER 2'-0"
MT40	#6x20'-0" @ 12"	STAGGER 4'-0"
MT42	#6x15'-0" @ 12"	STAGGER 2'-0"
MT43	#7x15'-0" @ 6"	STAGGER 3'-0"

MILD TOP REINFORCEMENT SCHEDULE		
MARK	REINFORCING	REMARKS
MT50	(6) #5x24'-2" @ 12"	HOOK AT END
MT51	(11) #5x6'-8" @ 12"	HOOK AT END
MT52	(11) #5x11'-2" @ 12"	HOOK AT END
MT53	(7) #6x11'-0" @ 12"	HOOK AT END
MT54	(11) #5x14'-2" @ 12"	HOOK AT END
MT55	(16) #6x14'-0" @ 8"	HOOK AT END
MT56	(6) #5x14'-2" @ 12"	HOOK AT END
MT57	(6) #6x9'-0" @ 12"	HOOK AT END
MT58	(11) #6x14'-0" @ 12"	HOOK AT END
MT60	(16) #7x10'-10" @ 8"	HOOK AT END
MT61	(11) #5x14'-2" @ 12"	HOOK AT END
MT62	(11) #4x11'-4" @ 12"	HOOK AT END
MT63	(11) #4x14'-4" @ 12"	HOOK AT END
MT64	(11) #4x19'-4" @ 12"	HOOK AT END

MILD TOP REINFORCEMENT SCHEDULE		
MARK	REINFORCING	REMARKS
MT65	(11) #4x6'-10" @ 12"	HOOK AT END
MT66	(16) #7x18'-10" @ 8"	HOOK AT END
MT80	#5 @ 12"	HOOK BOTH ENDS
MT81	#5x14'-2" @ 12"	HOOK AT END
MT82	#6x29'-0" @ 12"	HOOK AT END
MT83	#5x19'-2" @ 12"	HOOK AT END
MT84	#5x6'-8" @ 12"	HOOK AT END
MT85	#5x9'-2" @ 12"	HOOK AT END
MT86	#5x11'-2" @ 12"	HOOK AT END
MT87	#6x11'-0" @ 12"	HOOK AT END
MT88	#4x14'-4" @ 12"	HOOK AT END
MT89	#4x6'-10" @ 12"	HOOK AT END
MT90	#4 @ 12"	HOOK BOTH ENDS
MT91	#4x9'-4" @ 12"	HOOK AT END
MT92	#6x14'-0" @ 12"	HOOK AT END
MT93	#5x19'-2" @ 10"	HOOK AT END
MT97	#7x10'-10" @ 12"	HOOK AT END

MILD BOTTOM REINFORCEMENT SCHEDULE		
MARK	REINFORCING	REMARKS
MB1	#5x20'-0" @ 12"	STAGGER 2'-0"
MB2	#5x12'-0" @ 24"	STAGGER 2'-0"
MB4	(3) #5x12'-0" @ 14"	STAGGER 2'-0"
MB5	#5x20'-0" @ 18"	STAGGER 2'-0"
MB6	#5x20'-0" @ 16"	STAGGER 2'-0"
MB7	(6) #5x15'-0" @ 16"	STAGGER 2'-0"
MB8	(11) #5x20'-0" @ 12"	STAGGER 3'-0"
MB9	(3) #5x15'-0" @ 24"	STAGGER 2'-0"
MB15	(6) #5x30'-0" @ 24"	STAGGER 3'-0"
MB16	(11) #4x12'-0" @ 12"	STAGGER 3'-0"
MB17	#6x5'-2" @ 24"	HOOK AT END

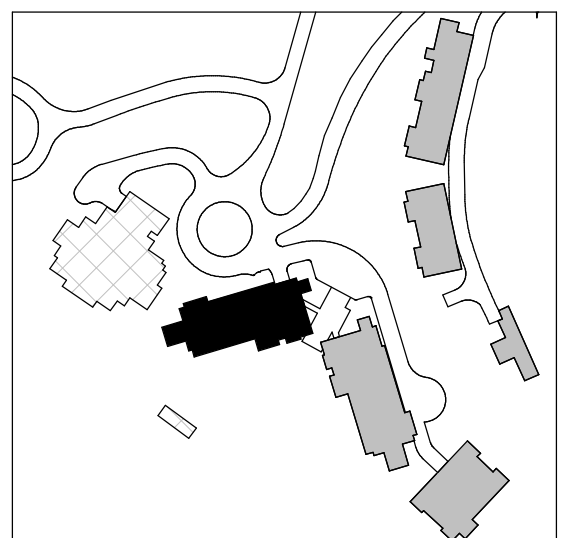

principal architect \_\_\_\_\_  
project manager \_\_\_\_\_  
drawn by \_\_\_\_\_  
Author \_\_\_\_\_  
checked by JB \_\_\_\_\_  
job no. 20052 \_\_\_\_\_  
date 11/18/2022 \_\_\_\_\_  
revisions: \_\_\_\_\_  
no. date by


CONSTRUCTION  
DOCUMENTS

11/18/2022

TOWER A LEVEL 1  
REINFORCING  
PLAN

S2.A.11.R



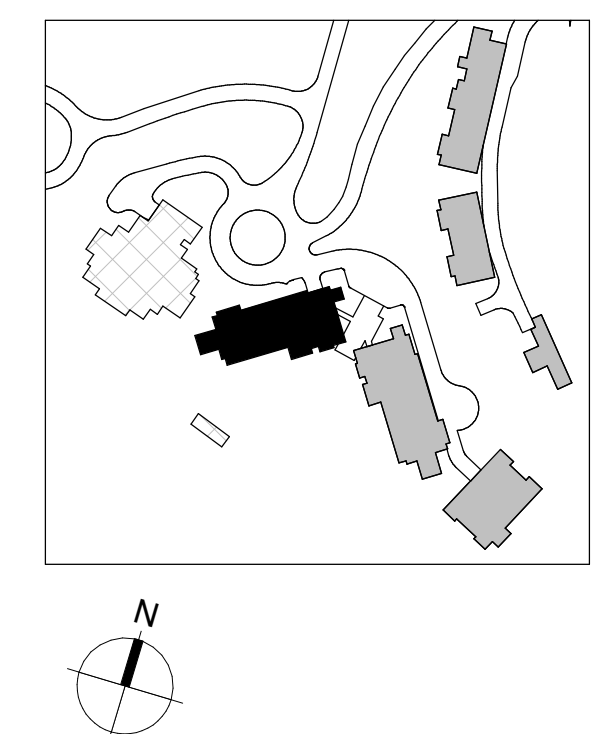

















159 South Jackson St, Suite 600  
Seattle, Washington 98104 USA  
+1 206 624 5670 [olsonkundig.com](mailto:olsonkundig.com)



SOMMET BLANC - ABC  
DEER VALLEY, UTAH

revisions:

1	11/18/2022
o.	date

11/18/2022

S2.A.14

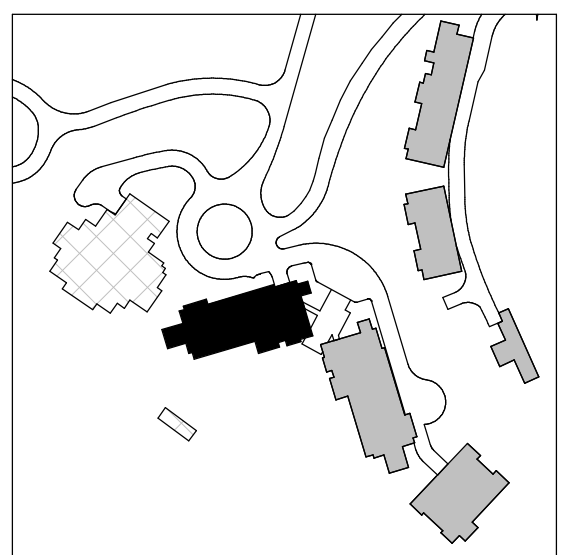
$$\frac{1}{8}'' = 1'-0''$$

S0.XX	DRAWING INDEX, ABBREVIATIONS, LEGENDS, GENERAL NOTES
S1.XX	LOAD DIAGRAMS
S2.XX	PLANS
S3.XX	ELEVATIONS
S4.XX	TYPICAL DETAILS AND SCHEDULES
S5.XX	CONCRETE SECTIONS AND DETAILS
S6.XX	STEEL SECTIONS AND DETAILS


1. REFERENCE FLOOR ELEVATION IS 8393' - 0". TOP OF STRUCTURAL CONCRETE SLAB IS 8392' - 11". UNLESS NOTED OTHERWISE. SEE ARCHITECTURAL DRAWINGS FOR DRAINAGE SLOPES NOT SHOWN.
2. STRUCTURAL SLAB IS AN 8-INCH THICK UNBONDED POST-TENSIONED TWO-WAY SLAB UNLESS NOTED OTHERWISE. SEE TYPICAL POST-TENSIONED SLAB DETAILS FOR ADDITIONAL INFORMATION.
3. THE MINIMUM NUMBER OF REQUIRED POST-TENSIONING TENDONS IS SHOWN ON THE DRAWINGS. FINAL COUNT, LAYOUT, AND LIVE END LOCATION IS PER DEFERRED DESIGN-BUILD SUBMITTAL PROVIDED BY THE CONTRACTOR.
4. CONCRETE PLACED IN THE SLAB/SHEAR WALL INTERSECTION, INCLUDING COUPLING BEAMS, SHALL HAVE MINIMUM CONCRETE STRENGTH EQUAL TO THAT SPECIFIED FOR THE SHEAR WALLS.
5. CONCRETE PLACED IN THE SLAB/COLUMN INTERSECTION SHALL HAVE MINIMUM CONCRETE STRENGTH AS SHOWN IN THE GENERAL NOTES, BUT NO LESS THAN THAT SPECIFIED FOR THE COLUMNS DIVIDED BY 1.4.
6. COORDINATE LOCATION OF ALL EMBEDS WITH MECHANICAL, ELECTRICAL, PLUMBING, AND EXTERIOR WALL SYSTEMS PRIOR TO CASTING THE SLAB.

7. ☐ SEE ARCHITECTURAL, MECHANICAL, PLUMBING, ELECTRICAL, AND OTHER DISCIPLINES DRAWINGS FOR OPENING SIZES AND LOCATIONS NOT SHOWN ON PLAN. SEE "TYPICAL OPENINGS AND EMBEDMENTS IN CONCRETE" DETAILS FOR OPENING PLACEMENT CRITERIA. NOTIFY THE STRUCTURAL ENGINEER OF ANY OPENINGS NOT SHOWN ON THE STRUCTURAL DRAWINGS FOR WHICH THE TYPICAL DETAILS DO NOT APPLY.
8. ☐ REFERENCE ALL CONSTRUCTION DOCUMENTS FOR SIZE, EXTENT, AND LOCATION OF CONCRETE CURBS, HOUSEKEEPING PADS, CMU WALLS, PLANTER WALLS, BOLLARDS, AND EDGE ANGLES. REINFORCE PER THE TYPICAL DETAILS.
9. ☒ INDICATES FOUR STRIPS. WAIT 28 DAYS MINIMUM AFTER PLACING SLAB CONCRETE PRIOR TO CASTING POUR STRIPS. SEE "TYPICAL POST-TENSIONED DELAY STRIP" DETAIL FOR MORE INFORMATION.
10. ☐ INDICATES TYPICAL BUILT-UP SLAB ON RIGID FOAM. SEE ARCHITECTURAL DRAWINGS FOR LOCATIONS AND ELEVATIONS OF ARCHITECTURAL BUILT-UP SLABS. SEE TYPICAL BUILT-UP SLAB DETAIL FOR ADDITIONAL INFORMATION.










Reserved for permit stamp

150 South Jackson St., Suite 800  
Seattle, Washington 98104 USA  
+1 206 624 9700 olsonkundig.com

Olson Kundig

project:  
SOMMET BLANC - ABC  
DEER VALLEY, UTAH

MAGNUSSON  
KLEMENCIC  
ASSOCIATES  
Structural + Civil Engineers  
Seattle Chicago  
www.mka.com  
206.292.1200

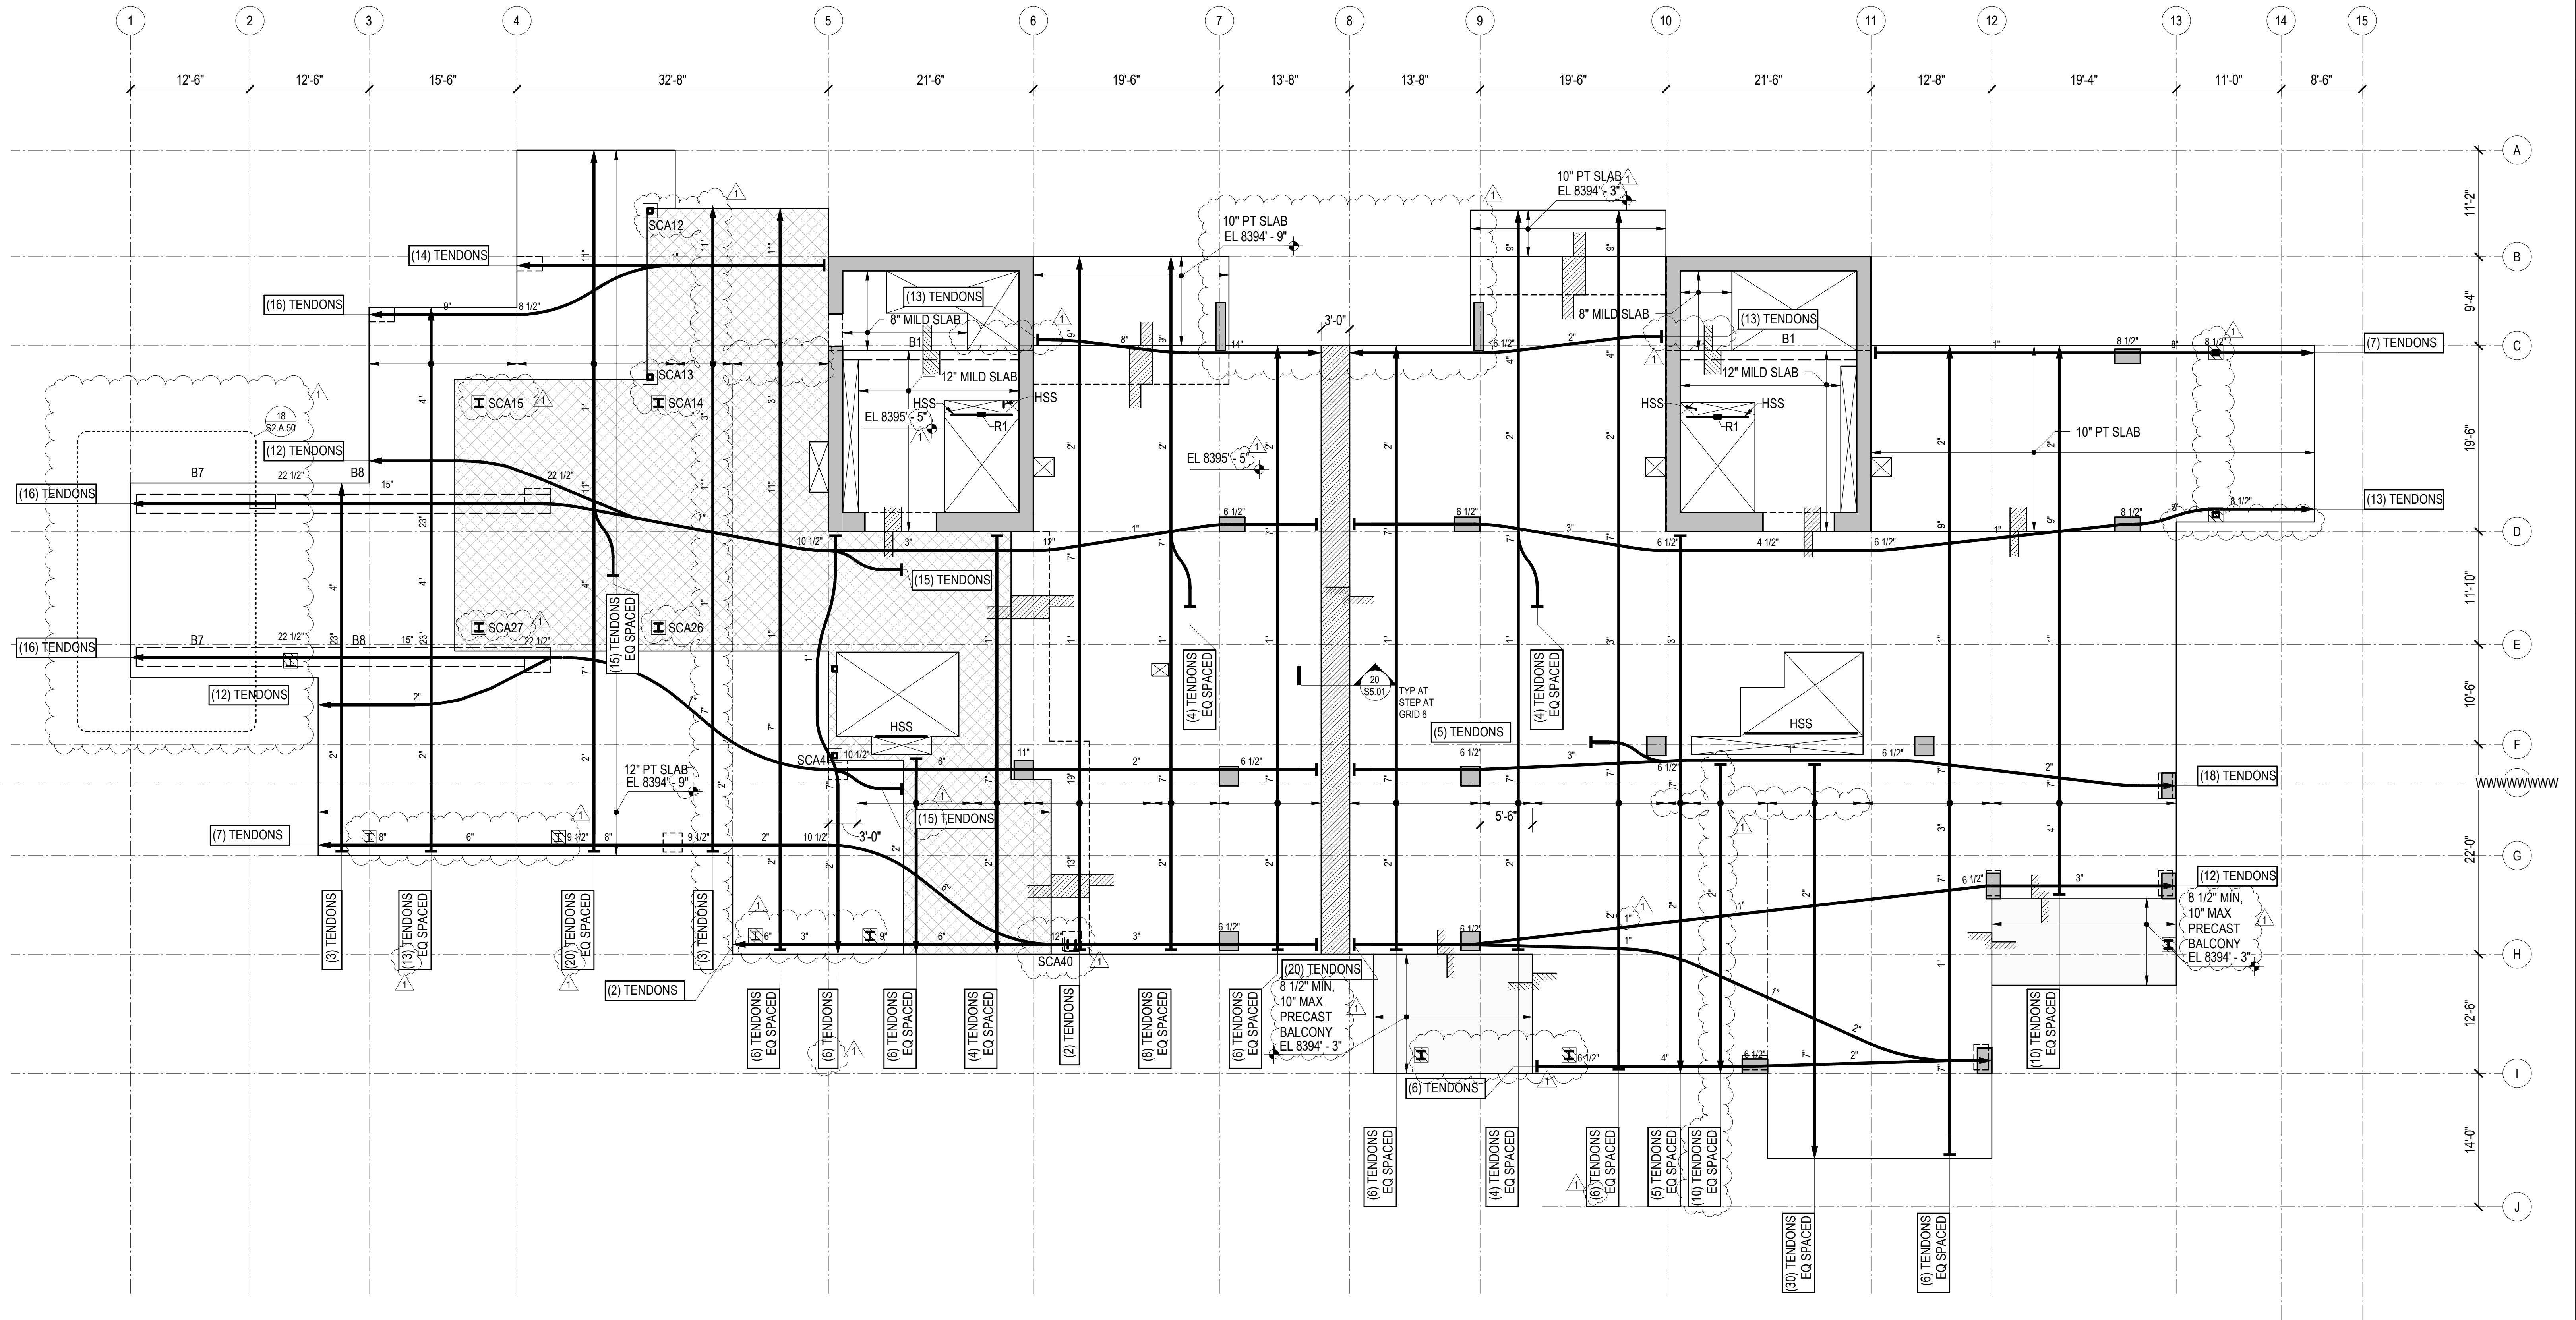

1 TOWER A - LEVEL 5 FRAMING PLAN  
1/8" = 1'-0"


REFERENCE DRAWINGS

S0.XX DRAWING INDEX, ABBREVIATIONS, LEGENDS, GENERAL NOTES  
S1.XX LOAD DIAGRAMS  
S2.XX PLANS  
S3.XX ELEVATIONS  
S4.XX TYPICAL DETAILS AND SCHEDULES  
S5.XX CONCRETE SECTIONS AND DETAILS  
S6.XX STEEL SECTIONS AND DETAILS

NOTES

1. REFERENCE FLOOR ELEVATION IS 8394'-0". TOP OF STRUCTURAL CONCRETE SLAB IS 8394'-11" UNLESS NOTED OTHERWISE. SEE ARCHITECTURAL DRAWINGS FOR DRAINAGE SLOPES NOT SHOWN.
2. STRUCTURAL SLAB IS AN 8-INCH THICK UNBONDED POST-TENSIONED TWO-WAY SLAB UNLESS NOTED OTHERWISE. SEE TYPICAL POST-TENSIONED SLAB DETAILS FOR ADDITIONAL INFORMATION.
3. THE MINIMUM NUMBER OF REQUIRED POST-TENSIONING TENDONS IS SHOWN ON THE DRAWINGS. FINAL COUNT, LAYOUT, AND LIVE END LOCATION IS PER DEFERRED DESIGN-BUILD SUBMITTAL PROVIDED BY THE CONTRACTOR.
4. CONCRETE PLACED IN THE SLAB/SHEAR WALL INTERSECTION, INCLUDING COUPLING BEAMS, SHALL HAVE MINIMUM CONCRETE STRENGTH EQUAL TO THAT SPECIFIED FOR THE SHEAR WALLS.
5. CONCRETE PLACED IN THE SLAB/COLUMN INTERSECTION SHALL HAVE MINIMUM CONCRETE STRENGTH AS SHOWN IN THE GENERAL NOTES, BUT NO LESS THAN THAT SPECIFIED FOR THE COLUMNS DIVIDED BY 1.4.
6. COORDINATE LOCATION OF ALL EMBEDS WITH MECHANICAL, ELECTRICAL, PLUMBING, AND EXTERIOR WALL SYSTEMS PRIOR TO CASTING THE SLAB.

7. SEE ARCHITECTURAL, MECHANICAL, PLUMBING, ELECTRICAL, AND OTHER DISCIPLINES DRAWINGS FOR OPENING SIZES AND LOCATIONS NOT SHOWN ON PLAN. SEE "TYPICAL OPENINGS AND EMBEDMENTS IN CONCRETE" DETAILS FOR OPENING PLACEMENT CRITERIA. NOTIFY THE STRUCTURAL ENGINEER OF ANY OPENINGS NOT SHOWN ON THE STRUCTURAL DRAWINGS FOR WHICH THE TYPICAL DETAILS DO NOT APPLY.
8. REFERENCE ALL CONSTRUCTION DOCUMENTS FOR SIZE, EXTENT, AND LOCATION OF CONCRETE CURBS, HOUSEKEEPING PADS, CMU WALLS, PLANTER WALLS, BOLLARDS, AND EDGE ANGLES. REINFORCE PER THE TYPICAL DETAILS.
9. [Symbol] INDICATES POUR STRIPS. WAIT 28 DAYS MINIMUM AFTER PLACING SLAB CONCRETE PRIOR TO CASTING POUR STRIPS. SEE "TYPICAL POST-TENSIONED DELAY STRIP" DETAIL FOR MORE INFORMATION.
10. [Symbol] INDICATES TYPICAL BUILT-UP SLAB ON RIGID FOAM. SEE ARCHITECTURAL DRAWINGS FOR LOCATIONS AND ELEVATIONS OF ARCHITECTURAL BUILT-UP SLABS. SEE TYPICAL BUILT-UP SLAB DETAIL FOR ADDITIONAL INFORMATION.
11. "SC#" INDICATES STEEL COLUMN MARK FOR COLUMNS NOT LOCATED BY GRID. SEE TYPICAL STEEL COLUMN DETAILS AND SCHEDULE FOR ADDITIONAL INFORMATION.

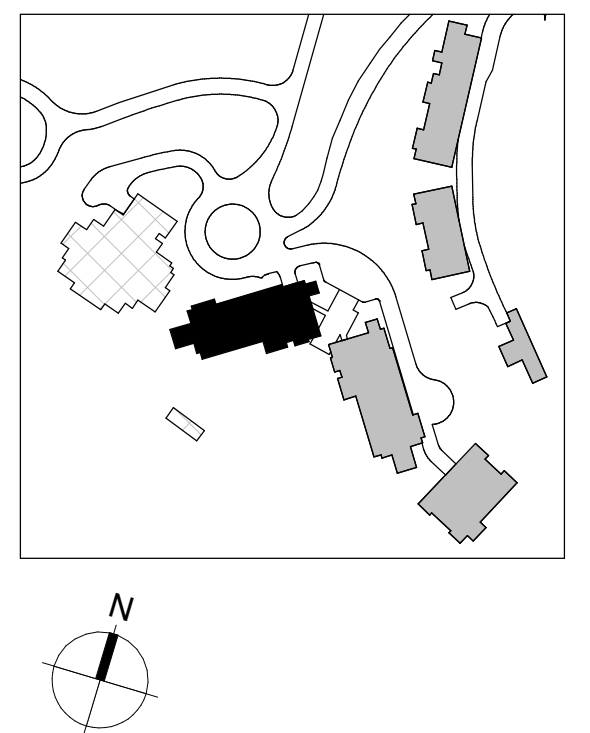


principal architect \_\_\_\_\_  
project manager \_\_\_\_\_  
drawn by \_\_\_\_\_  
Author \_\_\_\_\_  
checked by \_\_\_\_\_ JB  
job no. 20052  
date 11/18/2022  
revisions:  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
1 11/18/2022 IFC  
no. date by

CONSTRUCTION  
DOCUMENTS  
11/18/2022


TOWER A LEVEL 5  
FRAMING PLAN

S2.A.15







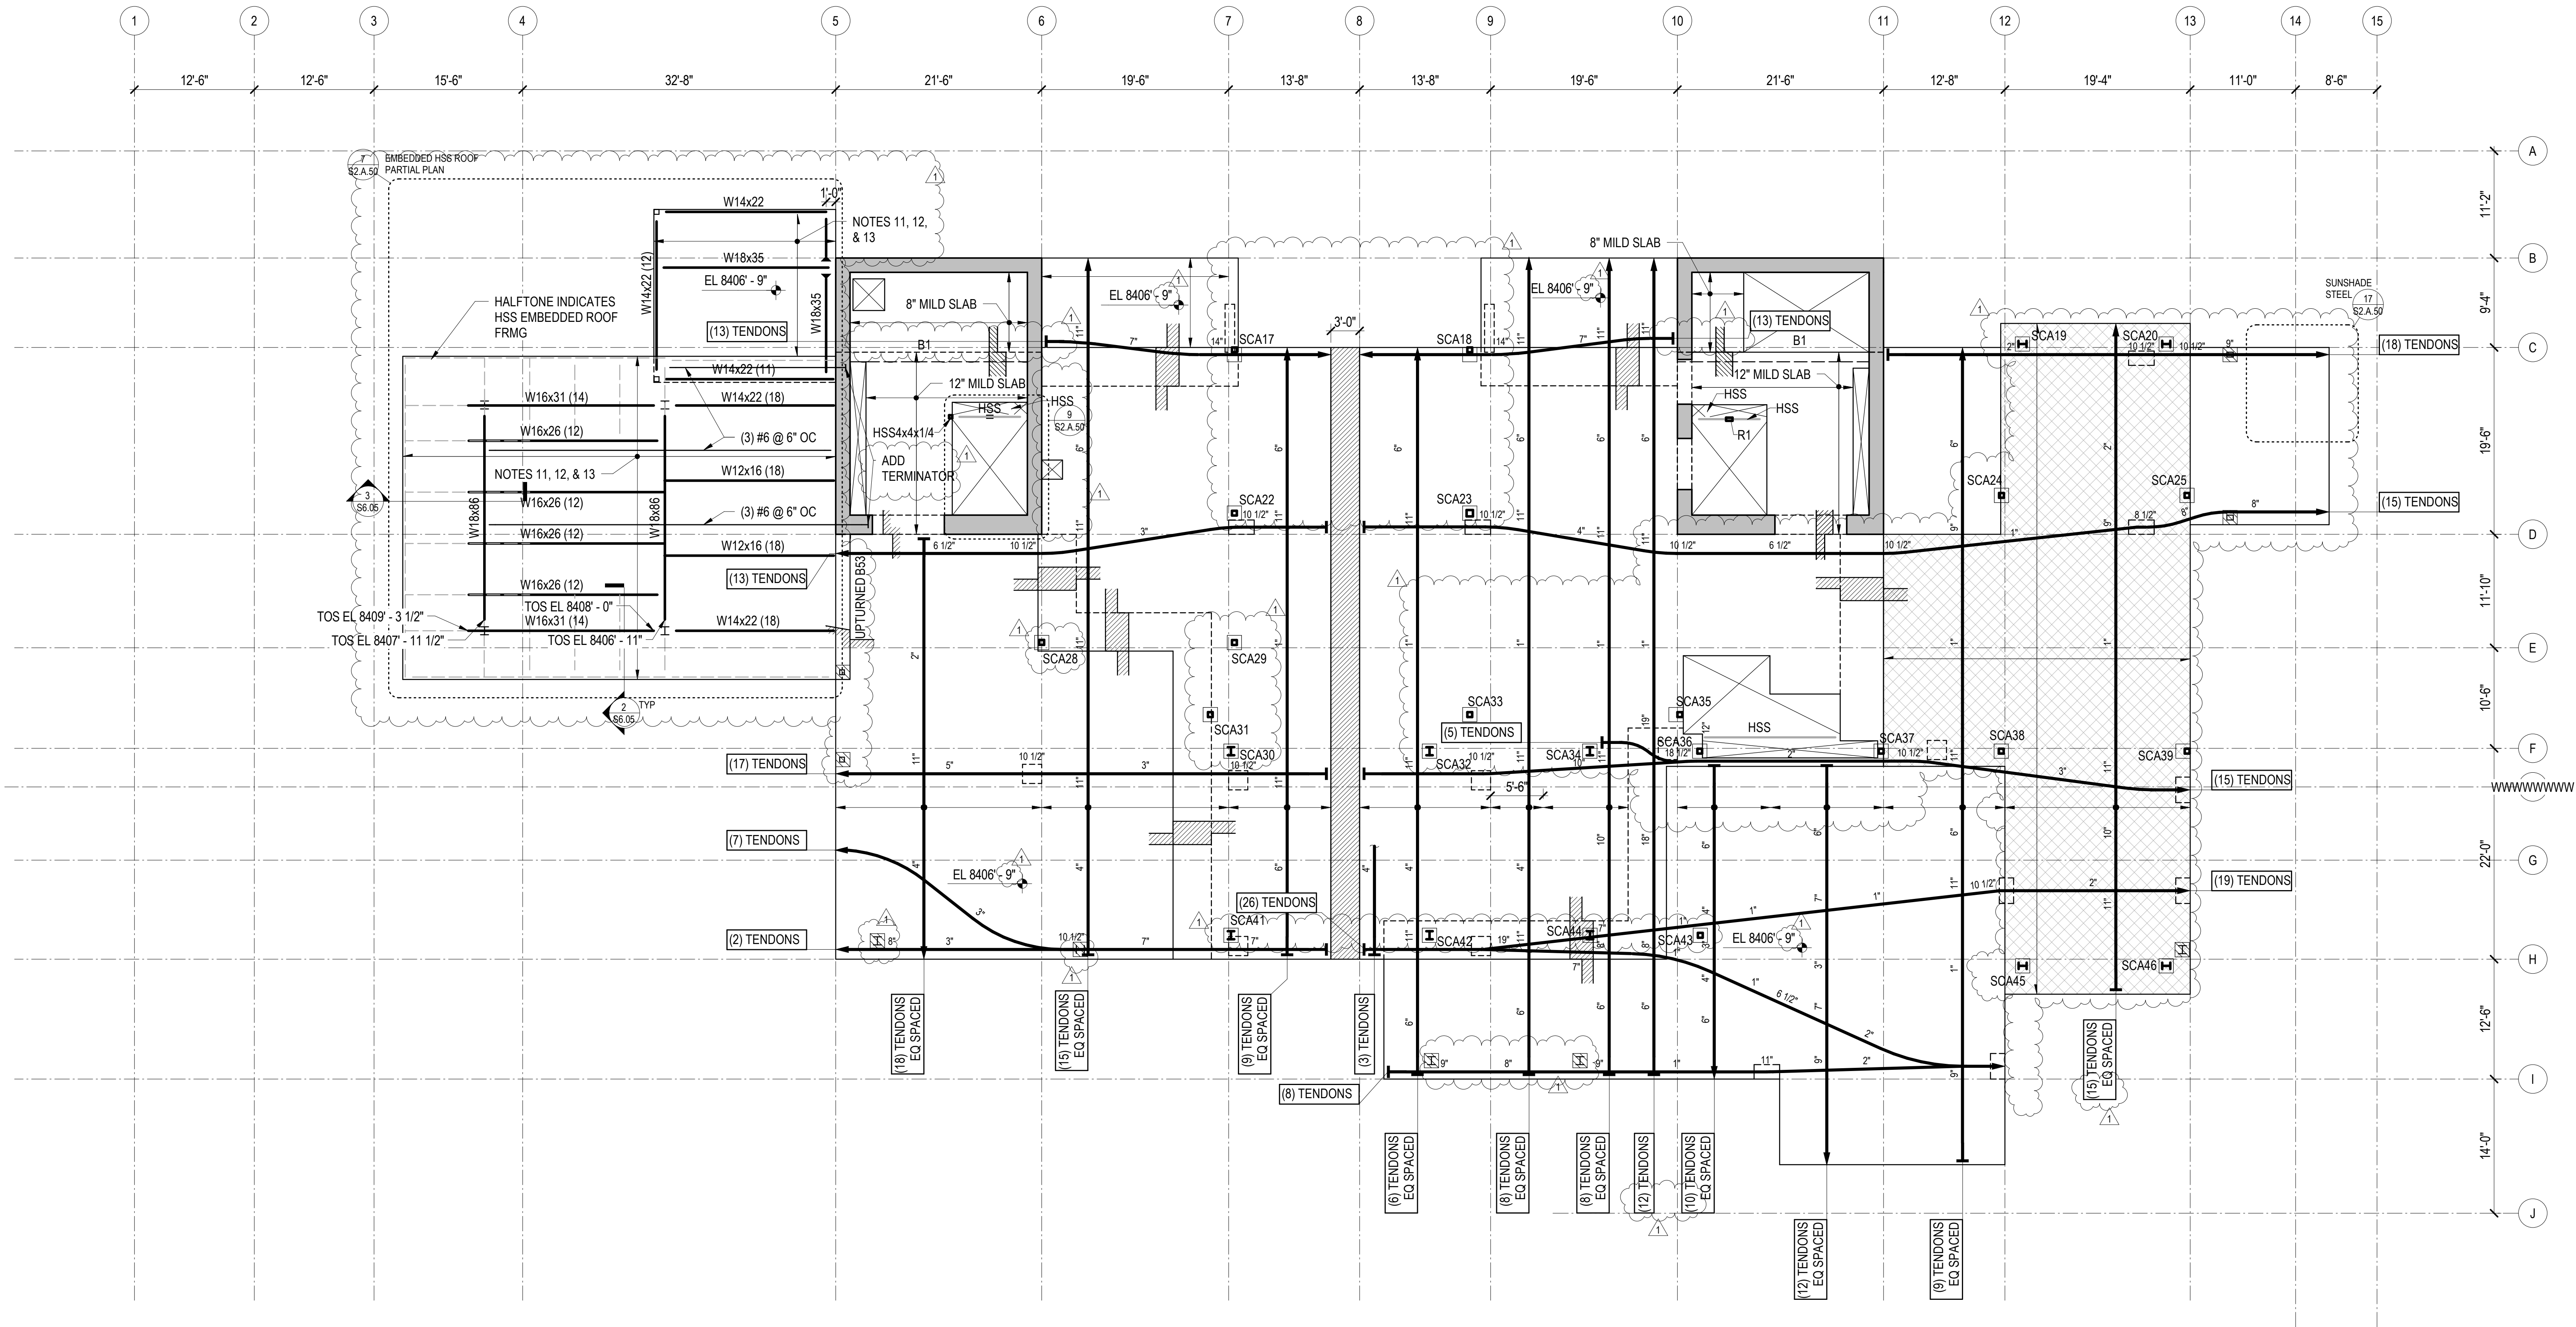

1 TOWER A - LEVEL 6 FRAMING PLAN  
1/8" = 1'-0"



REFERENCE DRAWINGS

- S0.XX DRAWING INDEX, ABBREVIATIONS, LEGENDS, GENERAL NOTES
- S1.XX LOAD DIAGRAMS
- S2.XX PLANS
- S3.XX ELEVATIONS
- S4.XX TYPICAL DETAILS AND SCHEDULES
- S5.XX CONCRETE SECTIONS AND DETAILS
- S6.XX STEEL SECTIONS AND DETAILS

NOTES

- REFERENCE FLOOR ELEVATION IS 8407' - 6". TOP OF STRUCTURAL CONCRETE SLAB IS 8407' - 5", UNLESS NOTED OTHERWISE. SEE ARCHITECTURAL DRAWINGS FOR DRAINAGE SLOPES NOT SHOWN.
- STRUCTURAL SLAB IS A 12-INCH THICK UNBONDED POST-TENSIONED TWO-WAY SLAB UNLESS NOTED OTHERWISE. SEE TYPICAL POST-TENSIONED SLAB DETAILS FOR ADDITIONAL INFORMATION.
- THE MINIMUM NUMBER OF REQUIRED POST-TENSIONING TENDONS IS SHOWN ON THE DRAWINGS. FINAL COUNT, LAYOUT, AND LIVE END LOCATION IS PER DEFERRED DESIGN-BUILD SUBMITTAL PROVIDED BY THE CONTRACTOR.
- CONCRETE PLACED IN THE SLAB/SHEAR WALL INTERSECTION, INCLUDING COUPLING BEAMS, SHALL HAVE MINIMUM CONCRETE STRENGTH EQUAL TO THAT SPECIFIED FOR THE SHEAR WALLS.
- CONCRETE PLACED IN THE SLAB/COLUMN INTERSECTION SHALL HAVE MINIMUM CONCRETE STRENGTH AS SHOWN IN THE GENERAL NOTES, BUT NO LESS THAN THAT SPECIFIED FOR THE COLUMNS DIVIDED BY 1.4.
- COORDINATE LOCATION OF ALL EMBEDS WITH MECHANICAL, ELECTRICAL, PLUMBING, AND EXTERIOR WALL SYSTEMS PRIOR TO CASTING THE SLAB.

- SEE ARCHITECTURAL, MECHANICAL, PLUMBING, ELECTRICAL, AND OTHER DISCIPLINES DRAWINGS FOR OPENING SIZES AND LOCATIONS NOT SHOWN ON PLAN. SEE "TYPICAL OPENINGS AND EMBEDMENTS IN CONCRETE" DETAILS FOR OPENING PLACEMENT CRITERIA. NOTIFY THE STRUCTURAL ENGINEER OF ANY OPENINGS NOT SHOWN ON THE STRUCTURAL DRAWINGS FOR WHICH THE TYPICAL DETAILS DO NOT APPLY.
- REFERENCE ALL CONSTRUCTION DOCUMENTS FOR SIZE, EXTENT, AND LOCATION OF CONCRETE CURBS, HOUSEKEEPING PADS, CMU WALLS, PLANTER WALLS, BOLLARDS, AND EDGE ANGLES. REINFORCE PER THE TYPICAL DETAILS.
- INDICATES POUR STRIPS. WAIT 28 DAYS MINIMUM AFTER PLACING SLAB CONCRETE PRIOR TO CASTING POUR STRIPS. SEE "TYPICAL POST-TENSIONED DELAY STRIP" DETAIL FOR MORE INFORMATION.
- INDICATES TYPICAL BUILT-UP SLAB ON RIGID FOAM. SEE ARCHITECTURAL DRAWINGS FOR LOCATIONS AND ELEVATIONS OF ARCHITECTURAL BUILT-UP SLABS. SEE TYPICAL BUILT-UP SLAB DETAIL FOR ADDITIONAL INFORMATION.
- STRUCTURAL SLAB IS 3-INCHES OF LIGHTWEIGHT CONCRETE ON 3-INCH COMPOSITE STEEL DECK UNLESS NOTED OTHERWISE. REINFORCE WITH WWR 6x6-W2.9xW2.9. SEE TYPICAL SLAB ON STEEL DECK DETAILS FOR REINFORCING AND OTHER INFORMATION. REINFORCING SHOWN ON THE PLAN AND IN THE TYPICAL DETAILS IS IN ADDITION TO THIS REINFORCING.
- REFERENCE TOP OF STEEL IS AT THE BOTTOM OF SLAB ON STEEL DECK UNLESS NOTED OTHERWISE.
- STEEL SLOPES UNIFORMLY BETWEEN GIVEN TOP OF STEEL ELEVATIONS. WHERE BEAMS OR BEAMS AND COLUMNS INTERSECT, MATCH TOP OF STEEL UNLESS NOTED OTHERWISE.
- "SC#" INDICATES STEEL COLUMN MARK FOR COLUMNS NOT LOCATED BY GRID. SEE TYPICAL STEEL COLUMN DETAILS AND SCHEDULE FOR ADDITIONAL INFORMATION.

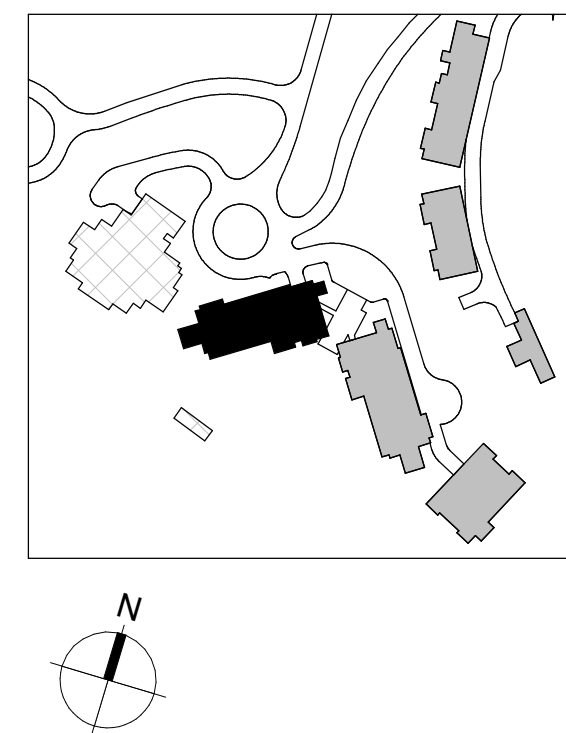

Reserved for permit stamp

159 South Jackson St., Suite 800  
Seattle, Washington 98104 USA  
+1 206 624 9707 olsonkundig.com

Olson Kundig

project:  
SOMMET BLANC - ABC  
DEER VALLEY, UTAH

MAGNUSSON  
KLEMENCIC  
ASSOCIATES

Structural + Civil Engineers  
Seattle Chicago  
www.mka.com  
206.292.1200

principal architect \_\_\_\_\_  
project manager \_\_\_\_\_  
drawn by \_\_\_\_\_  
Author \_\_\_\_\_  
checked by JB \_\_\_\_\_  
job no. 20052 \_\_\_\_\_  
date 11/18/2022 \_\_\_\_\_  
revisions: \_\_\_\_\_  
no. date by

CONSTRUCTION  
DOCUMENTS

11/18/2022

TOWER A LEVEL 6  
FRAMING PLAN

S2.A.16










A circle with a vertical radius line extending from the center to the top edge, labeled with the letter 'N'.











+1 206 624 5670 [dissonikunhug.com](http://dissonikunhug.com)

**SOMMET BLANC - ABC**  
DEER VALLEY, UTAH

Seattle Chicago  
www.mka.com  
206 292 1200

project manager \_\_\_\_\_

Author

job no. 20052

---

---

---

---

---

11/18/2022 JEC

date by

DOCUMENTS

7/18/2022

POWER A &amp; B

## FRAMING PLAN

S2.AB.01




1 TOWER AB - PARKING LEVEL 2 FRAMING PLAN  
1/8" = 1'-0"

$$\frac{1}{8}'' = 1'-0''$$

S0.XX	DRAWING INDEX, ABBREVIATIONS, LEGENDS, GENERAL NOTES
S1.XX	LOAD DIAGRAMS
S2.XX	PLANS
S3.XX	ELEVATIONS
S4.XX	TYPICAL DETAILS AND SCHEDULES
S5.XX	CONCRETE SECTIONS AND DETAILS
S6.XX	STEEL SECTIONS AND DETAILS

1. REFERENCE FLOOR ELEVATION IS 8333'- 0". TOP OF CONCRETE SLAB IS AT THE REFERENCE ELEVATION UNLESS NOTED OTHERWISE. SEE ARCHITECTURAL DRAWINGS FOR DRAINAGE SLOPES NOT SHOWN.
2. MAT FOUNDATION IS 3'-0" THICK UNLESS NOTED OTHERWISE. UPON REACHING THE MAT FOUNDATION SUBGRADE ELEVATION, SOIL CONDITIONS SHALL BE EVALUATED AND APPROVED BY THE GEOTECHNICAL ENGINEER OF RECORD.
3. THE STRUCTURAL SLAB IS A 10-INCH THICK MILD TWO-WAY SLAB UNLESS NOTED OTHERWISE. SEE THE TYPICAL MILD SLAB DETAILS.
4. CONCRETE PLACED IN THE SLAB/SHEAR WALL INTERSECTION, INCLUDING COUPLING BEAMS, SHALL HAVE MINIMUM CONCRETE STRENGTH EQUAL TO THAT SPECIFIED FOR THE SHEAR WALLS.
5. CONCRETE PLACED IN THE SLAB/COLUMN INTERSECTION SHALL HAVE MINIMUM CONCRETE STRENGTH AS SHOWN IN THE GENERAL NOTES, BUT NO LESS THAN THAT SPECIFIED FOR THE COLUMNS DIVIDED BY 1.4.
6. COORDINATE LOCATION OF ALL EMBEDS WITH MECHANICAL, ELECTRICAL, PLUMBING, AND EXTERIOR WALL SYSTEMS PRIOR TO CASTING THE SLAB.
7. SEE ARCHITECTURAL, MECHANICAL, PLUMBING, ELECTRICAL, AND OTHER DISCIPLINES DRAWINGS FOR OPENING SIZES AND LOCATIONS NOT SHOWN ON PLAN. SEE "TYPICAL OPENINGS AND EMBEDMENTS IN CONCRETE" DETAILS FOR OPENING PLACEMENT CRITERIA. NOTIFY THE STRUCTURAL ENGINEER OF ANY OPENINGS NOT SHOWN ON THE STRUCTURAL DRAWINGS FOR WHICH THE TYPICAL DETAILS DO NOT APPLY.
8. REFERENCE ALL CONSTRUCTION DOCUMENTS FOR SIZE, EXTENT, AND LOCATION OF CONCRETE CURBS, HOUSEKEEPING PADS, CMU WALLS, PLANTER WALLS, BOLLARDS, AND EDGE ANGLES. REINFORCE PER THE TYPICAL DETAILS.



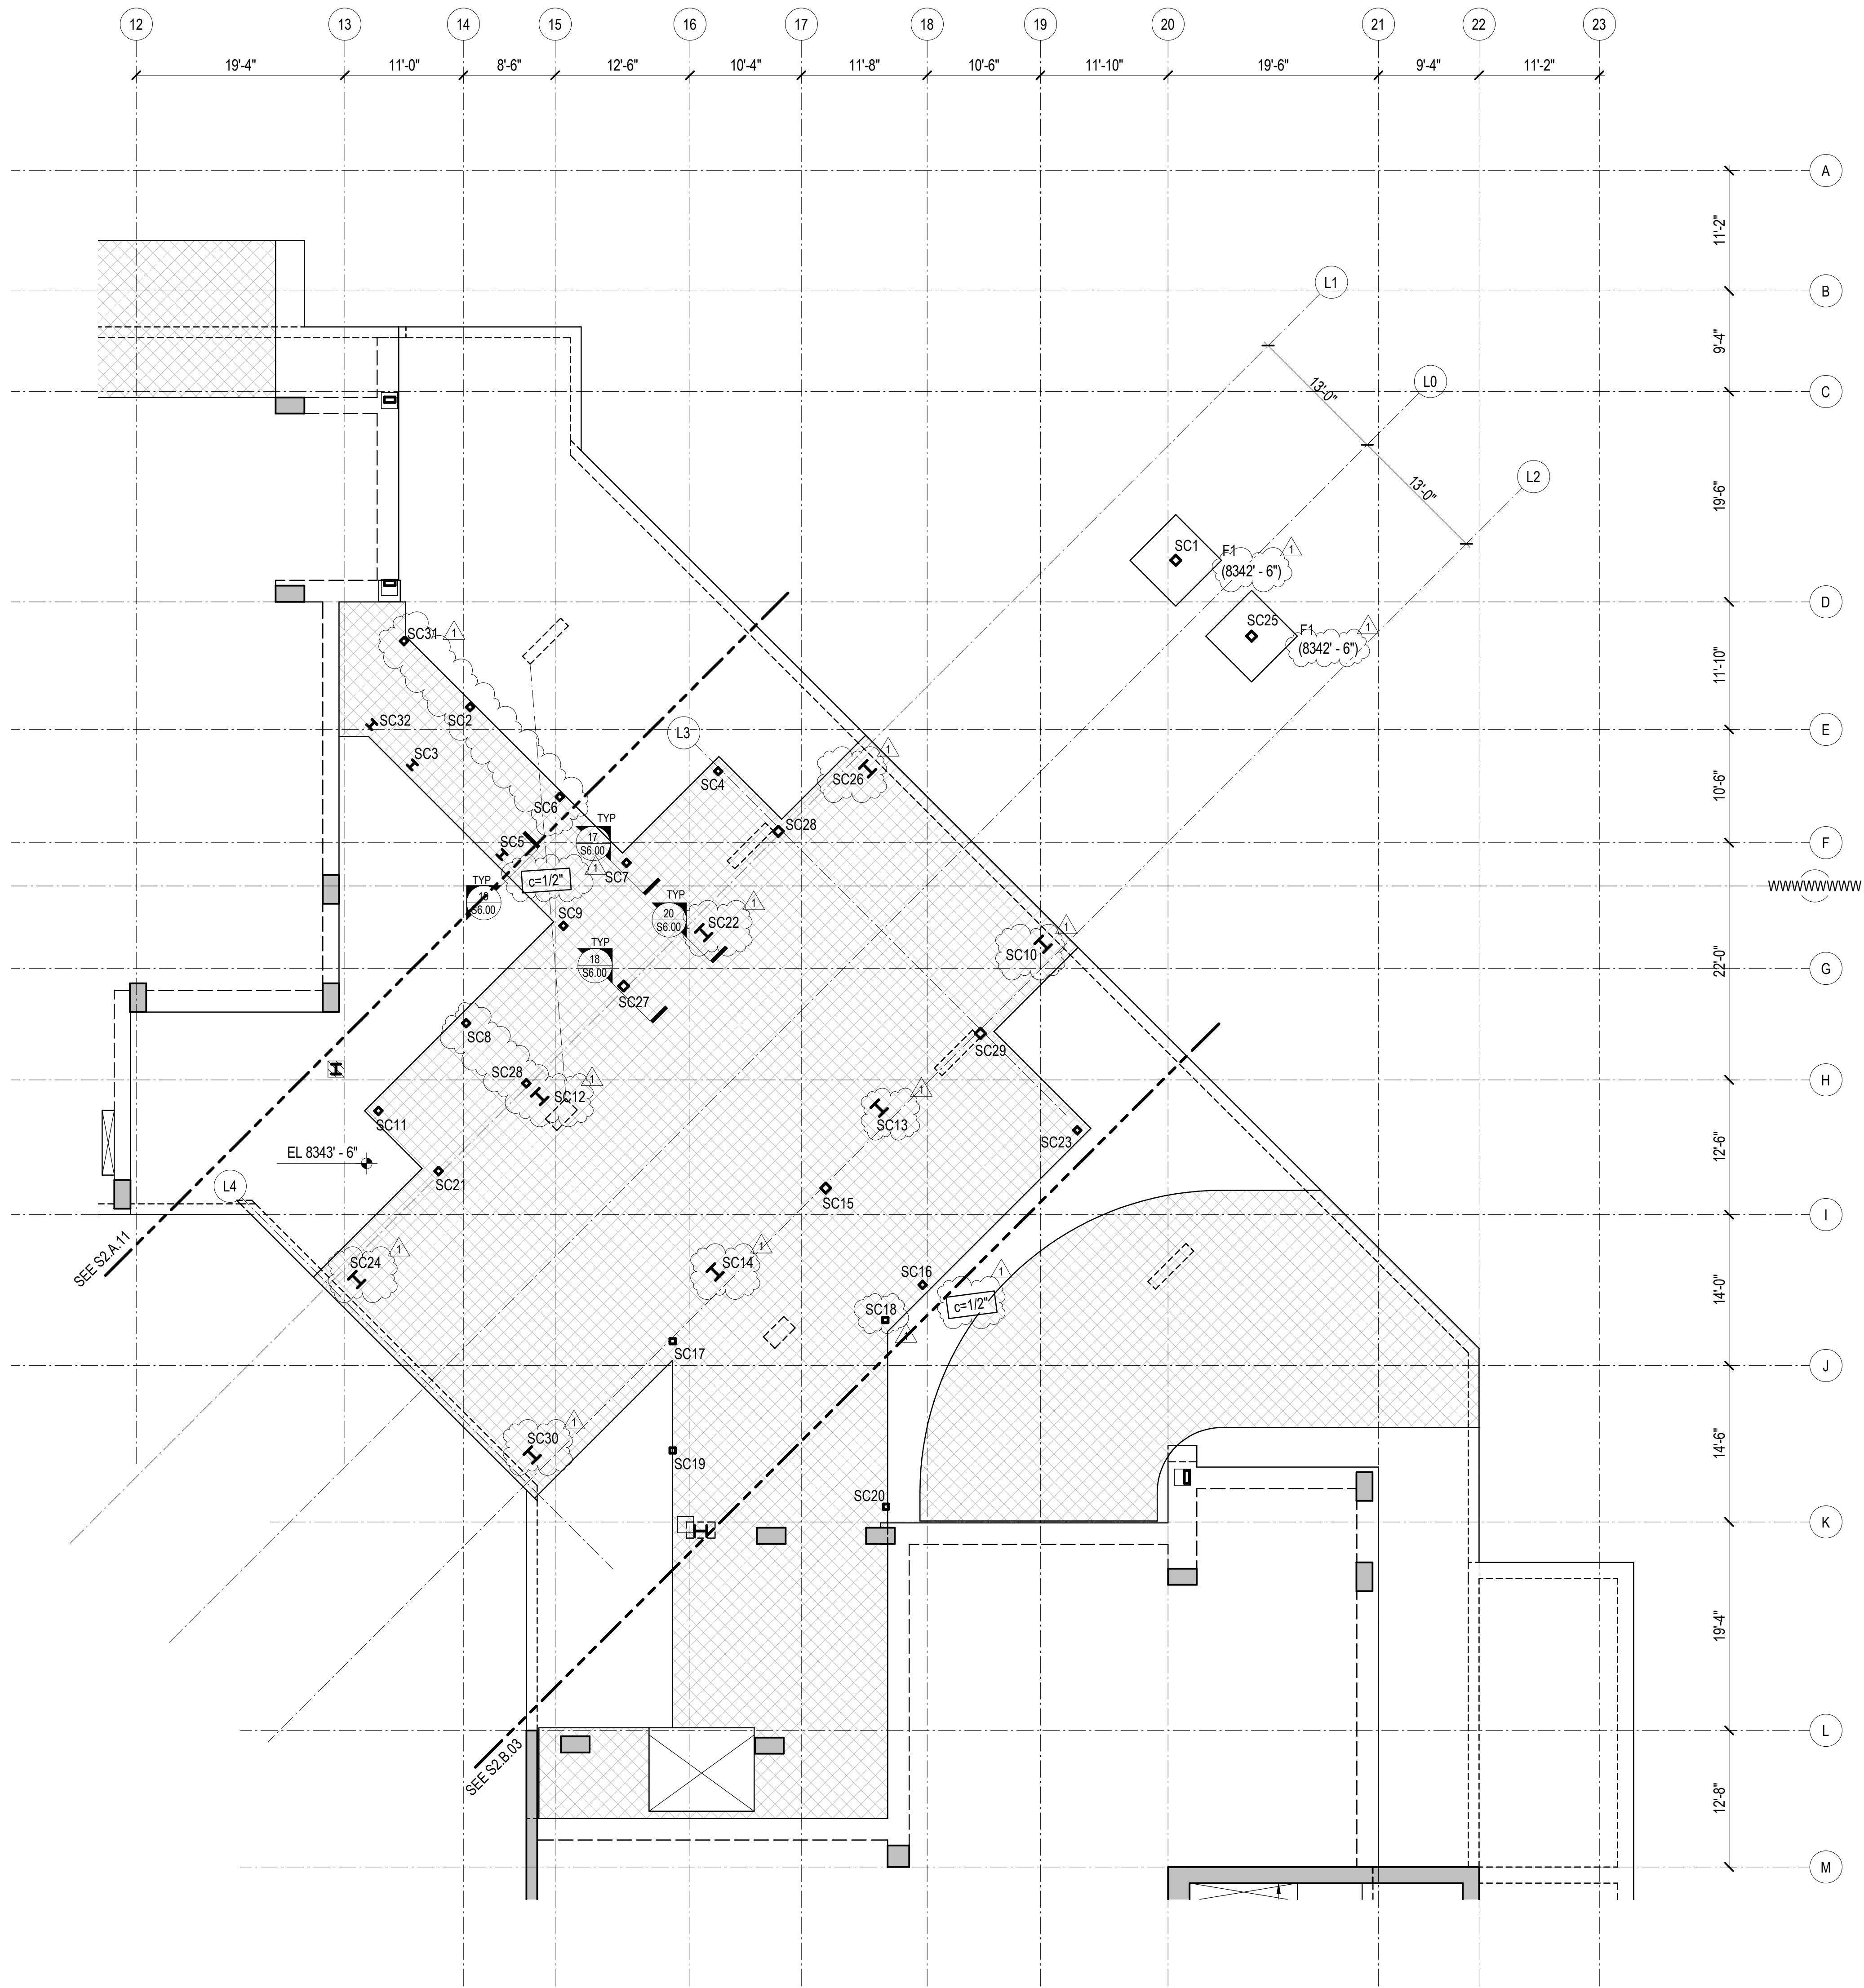

1 TOWER A & B - LEVEL 1 LOBBY FRAMING PLAN  
1/8" = 1'-0"

REFERENCE DRAWINGS


- S0.XX DRAWING INDEX, ABBREVIATIONS, LEGENDS, GENERAL NOTES
- S1.XX LOAD DIAGRAMS
- S2.XX PLANS
- S3.XX ELEVATIONS
- S4.XX TYPICAL DETAILS AND SCHEDULES
- S5.XX CONCRETE SECTIONS AND DETAILS
- S6.XX STEEL SECTIONS AND DETAILS

NOTES

- REFERENCE FLOOR ELEVATION IS 8343'-6". TOP OF CONCRETE SLAB IS AT THE REFERENCE ELEVATION UNLESS NOTED OTHERWISE. SEE ARCHITECTURAL DRAWINGS FOR DRAINAGE SLOPES NOT SHOWN.
- THE STRUCTURAL SLAB IS A 14-INCH THICK MILD TWO-WAY SLAB UNLESS NOTED OTHERWISE. SEE THE TYPICAL MILD SLAB DETAILS.
- CONCRETE PLACED IN THE SLAB/SHEAR WALL INTERSECTION, INCLUDING COUPLING BEAMS, SHALL HAVE MINIMUM CONCRETE STRENGTH EQUAL TO THAT SPECIFIED FOR THE SHEAR WALLS.

- CONCRETE PLACED IN THE SLAB/COLUMN INTERSECTION SHALL HAVE MINIMUM CONCRETE STRENGTH AS SHOWN IN THE GENERAL NOTES, BUT NO LESS THAN THAT SPECIFIED FOR THE COLUMNS DIVIDED BY 1.4.
- COORDINATE LOCATION OF ALL EMBEDS WITH MECHANICAL, ELECTRICAL, PLUMBING, AND EXTERIOR WALL SYSTEMS PRIOR TO CASTING THE SLAB.
- SEE ARCHITECTURAL, MECHANICAL, PLUMBING, ELECTRICAL, AND OTHER DISCIPLINES DRAWINGS FOR OPENING SIZES AND LOCATIONS NOT SHOWN ON PLAN. SEE "TYPICAL OPENINGS AND EMBEDMENT IN CONCRETE" DETAILS FOR OPENING PLACEMENT CRITERIA. NOTIFY THE STRUCTURAL ENGINEER OF ANY OPENINGS NOT SHOWN ON THE STRUCTURAL DRAWINGS FOR WHICH THE TYPICAL DETAILS DO NOT APPLY.
- REFERENCE ALL CONSTRUCTION DOCUMENTS FOR SIZE, EXTENT, AND LOCATION OF CONCRETE CURBS, HOUSEKEEPING PADS, CMU WALLS, PLANTER WALLS, BOLLARDS, AND EDGE ANGLES. REINFORCE PER THE TYPICAL DETAILS.
- INDICATES TYPICAL BUILT-UP SLAB ON RIGID FOAM. SEE ARCHITECTURAL DRAWINGS FOR LOCATIONS AND ELEVATIONS OF ARCHITECTURAL BUILT-UP SLABS. SEE TYPICAL BUILT-UP SLAB DETAIL FOR ADDITIONAL INFORMATION.

- ( ) INDICATES TOP OF FOOTING/ MAT FOUNDATION ELEVATION. ALL FOOTINGS SHALL BE PLACED AT TOP COMPACTED STRUCTURAL FILL IN ACCORDANCE WITH THE GEOTECHNICAL REPORT.
- 'FX' INDICATES FOOTING MARK. SEE FOOTING SCHEDULE FOR SIZE AND REINFORCEMENT.
- 'SC#' INDICATES STEEL COLUMN MARK FOR COLUMNS NOT LOCATED BY GRID. SEE TYPICAL STEEL COLUMN DETAILS AND SCHEDULE FOR ADDITIONAL INFORMATION.



Reserved for permit stamp

150 South Jackson St. Suite 600  
Seattle, Washington 98104 USA  
+1 206 824 5670 olsonkundig.com

Olson Kundig

project  
SOMMET BLANC - ABC  
DEER VALLEY, UTAH

MAGNUSSON  
KLEMENCIC  
ASSOCIATES  
Structural + Civil Engineers  
Seattle, Chicago  
www.mka.com  
206 292 1200

principal architect \_\_\_\_\_  
project manager \_\_\_\_\_  
drawn by \_\_\_\_\_  
checked by \_\_\_\_\_  
job no. 20052  
date 11/18/2022

revisions:

1 11/18/2022 IFC  
no. date by


CONSTRUCTION  
DOCUMENTS

11/18/2022

AB CONNECTOR  
LEVEL 1 FRAMING  
PLAN

S2.AB.11



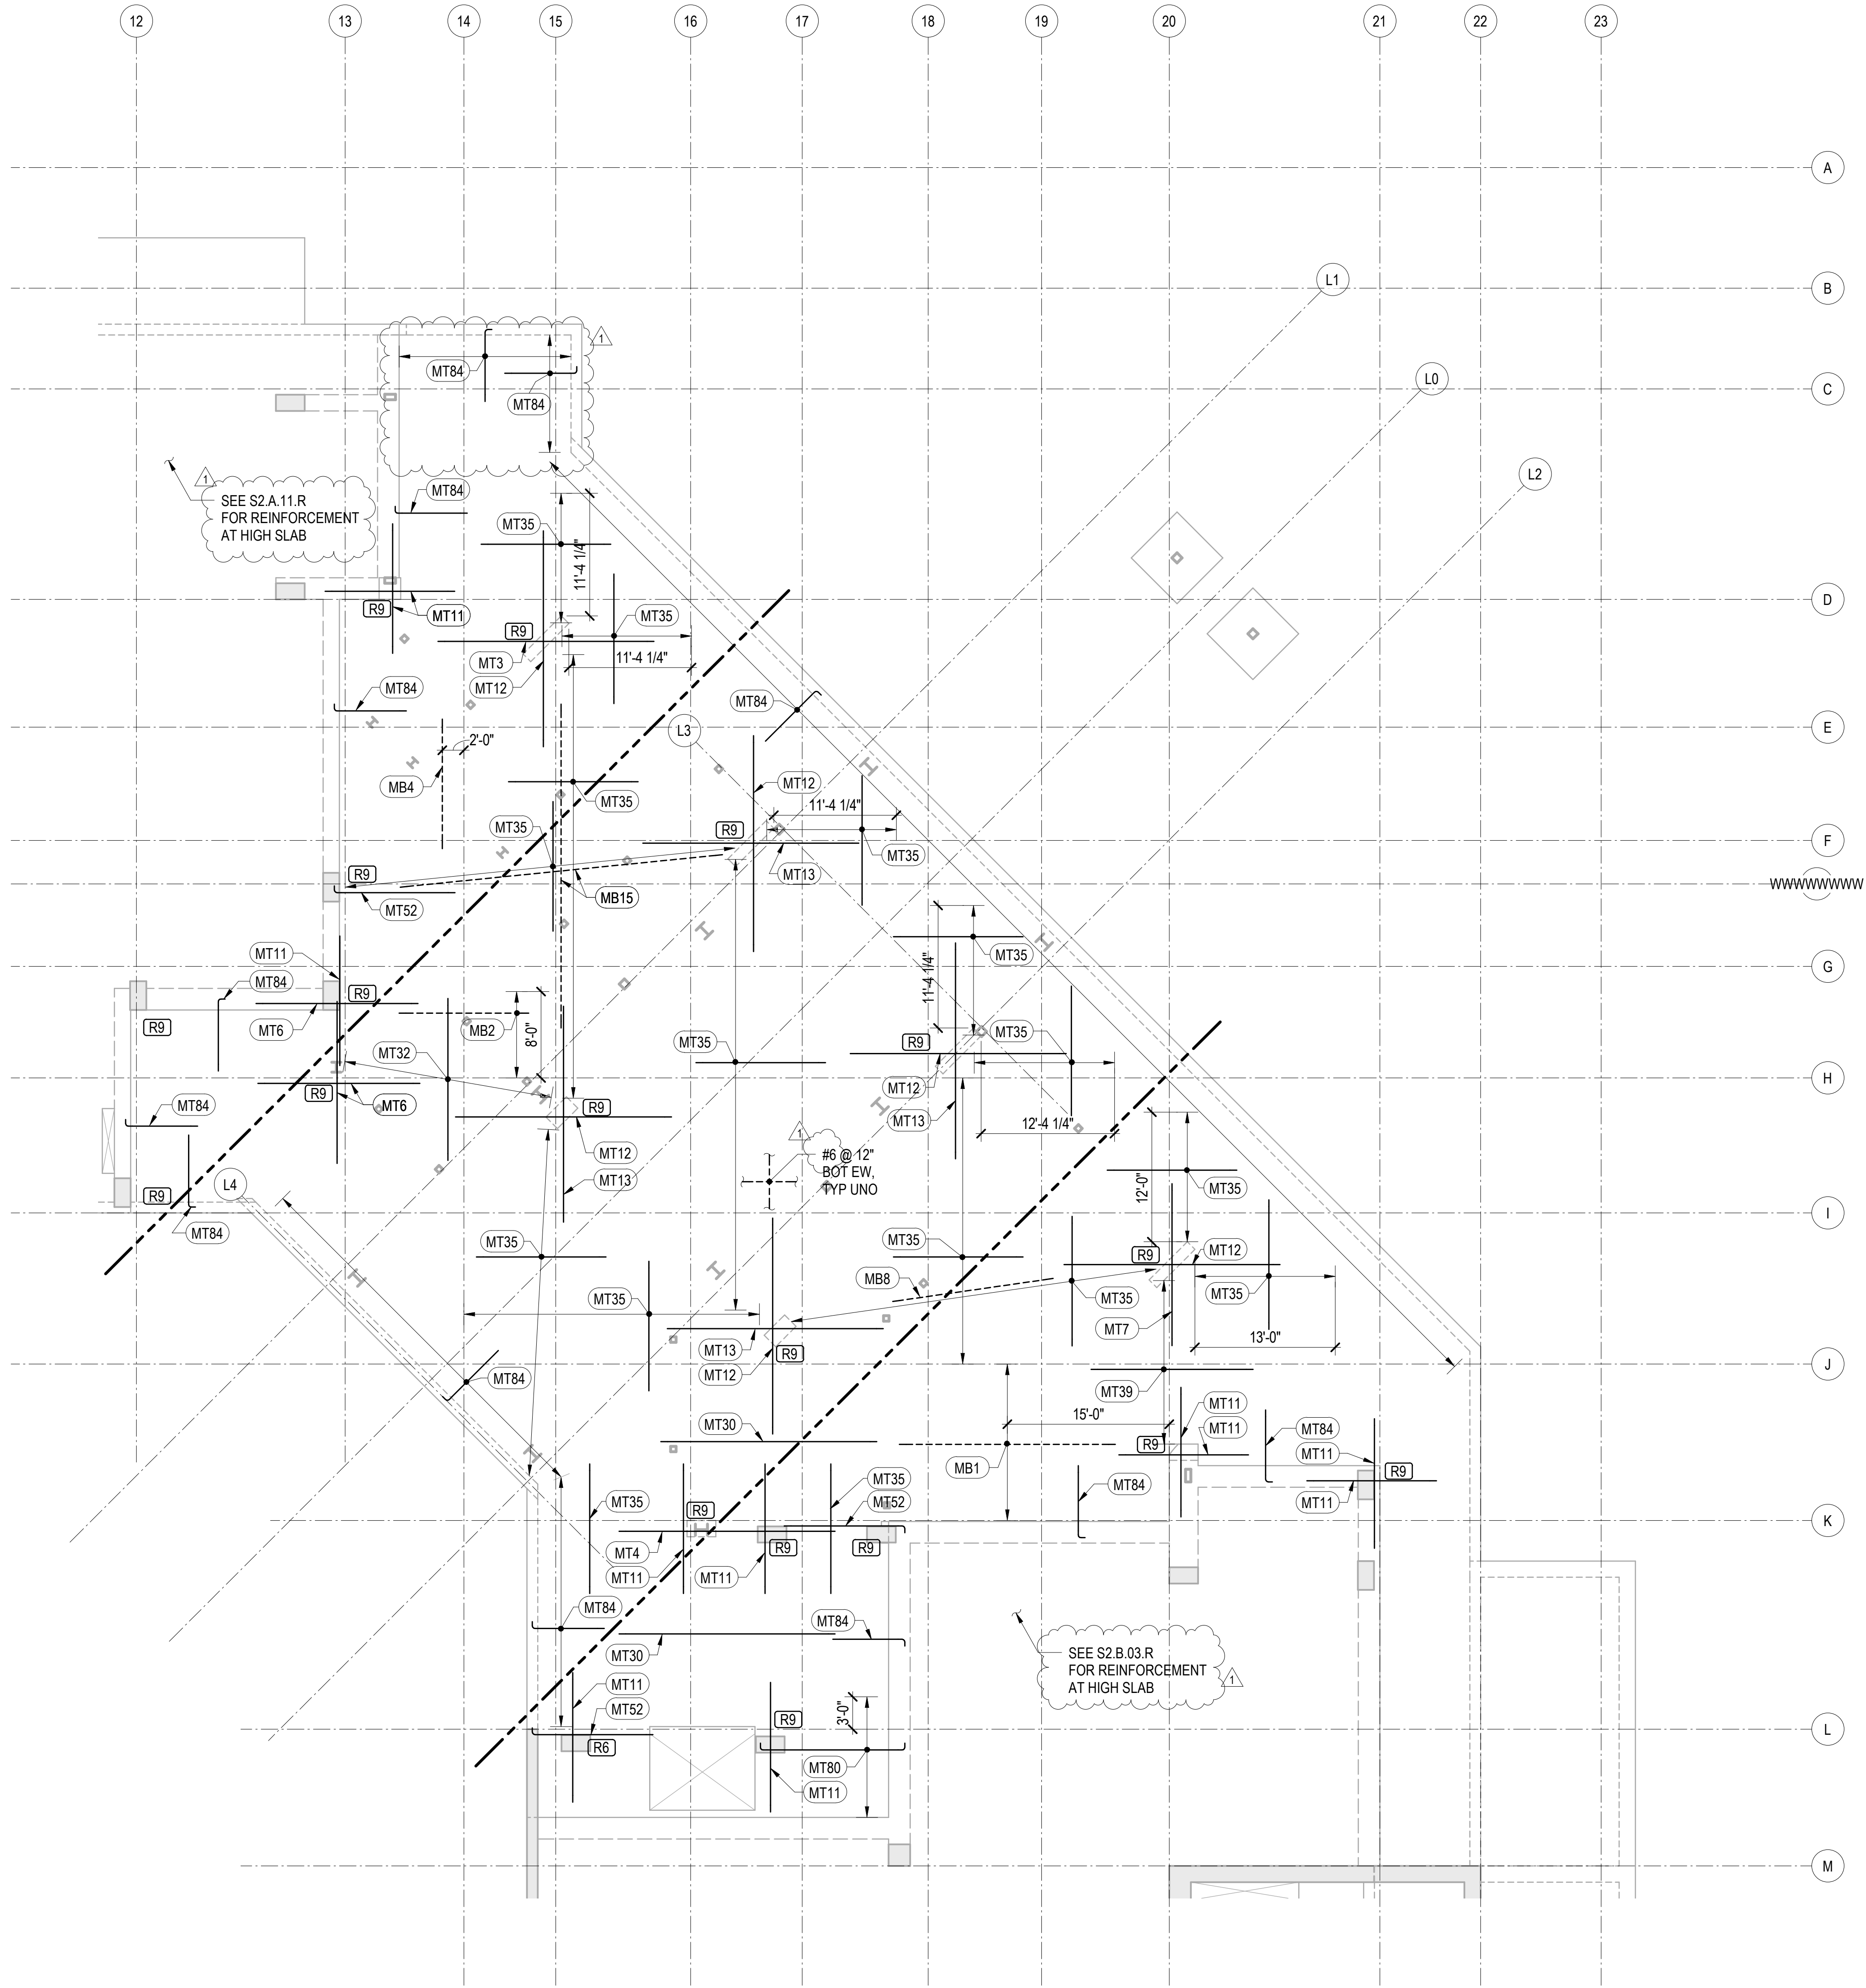

REINFORCING NOTES:

- SEE "GENERAL NOTES" FOR REINFORCING REQUIREMENTS.
- SEE "TYPICAL MILD SLAB DETAILS" FOR ADDITIONAL INFORMATION.
- SLAB REINFORCING SHALL BE PLACED IN THE FOLLOWING SEQUENCE:  
E-W BOTTOM BARS  
N-S BOTTOM BARS  
N-S TOP BARS  
E-W TOP BARS
- FOR CONTINUOUS BOTTOM BARS, LAP BARS Lsb AS REQUIRED WITH LAPS AT 1/3 THE SLAB SPAN BETWEEN ADJACENT COLUMNS.
- TWO OF THE CONTINUOUS BOTTOM BARS ARE TO BE PLACED EACH WAY THROUGH ALL COLUMNS WITH COLUMN VERTICAL REINFORCEMENT, UNLESS NOTED OTHERWISE.
- BOTTOM BARS CALLED OUT ARE IN ADDITION TO CONTINUOUS BOTTOM MAT.
- [RX] INDICATES STUD RAIL. STUD RAILS SHALL BE PLACED AT ALL COLUMNS. SEE "TYPICAL STUD RAIL REINFORCEMENT AT COLUMNS" DETAIL AND STUD RAIL SCHEDULE.
- SEE "TYPICAL CONCRETE OPENINGS AND EMBEDMENTS" FOR ADDITIONAL REINFORCEMENT REQUIREMENTS. NOTIFY STRUCTURAL ENGINEER OF ANY OPENINGS NOT SHOWN ON THE STRUCTURAL DRAWINGS FOR WHICH THE TYPICAL DETAILS DO NOT APPLY. ADDITIONAL REINFORCEMENT MAY BE REQUIRED.
- WHERE BAR LENGTH CANNOT BE ACHIEVED DUE TO SLAB EDGE, HOOK BAR.
- WHERE NOTED AS "HOOKED", PROVIDE 90 OR 180 DEGREE HOOK AS SHOWN ON PLAN. NOTED BAR LENGTH IS LENGTH OF STRAIGHT PORTION OF BAR.

1 TOWER A & B - LEVEL 1 LOBBY FRAMING PLAN  
1/8" = 1'-0"


MILD TOP REINFORCEMENT SCHEDULE		
MARK	REINFORCING	REMARKS
MT1	(13) #6x20'-0" @ 10"	STAGGER 6'-0"
MT2	(13) #7x20'-0" @ 10"	STAGGER 5'-0"
MT3	(11) #7x20'-0" @ 12"	STAGGER 4'-0"
MT4	(11) #6x20'-0" @ 12"	STAGGER 4'-0"
MT5	(13) #5x15'-0" @ 10"	STAGGER 4'-0"
MT6	(11) #6x15'-0" @ 12"	STAGGER 3'-0"
MT7	(15) #7x15'-0" @ 9"	STAGGER 3'-0"
MT8	(6) #5x15'-0" @ 12"	STAGGER 3'-0"
MT9	(6) #7x15'-0" @ 12"	STAGGER 3'-0"
MT11	(11) #5x12'-0" @ 12"	STAGGER 2'-0"
MT12	(16) #8x20'-0" @ 8"	STAGGER 5'-0"
MT13	(21) #8x20'-0" @ 6"	STAGGER 5'-0"
MT14	(21) #7x20'-0" @ 6"	STAGGER 5'-0"
MT15	(11) #5x15'-0" @ 12"	STAGGER 3'-0"
MT16	(11) #4x12'-0" @ 12"	STAGGER 2'-0"

MILD TOP REINFORCEMENT SCHEDULE		
MARK	REINFORCING	REMARKS
MT17	(11) #4x15'-0" @ 12"	STAGGER 3'-0"
MT18	(16) #8x20'-0" @ 8"	STAGGER 5'-0"
MT30	#5x20'-0" @ 12"	STAGGER 3'-0"
MT31	#5x20'-0" @ 10"	STAGGER 2'-0"
MT32	#5x15'-0" @ 12"	STAGGER 2'-0"
MT33	#5x12'-0" @ 12"	STAGGER 2'-0"
MT34	#5x20'-0" @ 12"	STAGGER 4'-0"
MT35	#4x12'-0" @ 12"	STAGGER 1'-0"
MT36	#5x7'-6" @ 12"	STAGGER 0'-0"
MT37	#4x12'-0" @ 12"	STAGGER 1'-0"
MT38	#4x15'-0" @ 12"	STAGGER 1'-0"
MT39	#5x15'-0" @ 8"	STAGGER 2'-0"
MT40	#6x20'-0" @ 12"	STAGGER 4'-0"
MT42	#6x15'-0" @ 12"	STAGGER 2'-0"
MT43	#7x15'-0" @ 6"	STAGGER 3'-0"

MILD TOP REINFORCEMENT SCHEDULE		
MARK	REINFORCING	REMARKS
MT50	(6) #5x24'-2" @ 12"	HOOK AT END
MT51	(11) #5x6'-8" @ 12"	HOOK AT END
MT52	(11) #5x11'-2" @ 12"	HOOK AT END
MT53	(7) #6x11'-0" @ 12"	HOOK AT END
MT54	(11) #5x14'-2" @ 12"	HOOK AT END
MT55	(16) #6x14'-0" @ 8"	HOOK AT END
MT56	(6) #5x14'-2" @ 12"	HOOK AT END
MT57	(6) #6x9'-0" @ 12"	HOOK AT END
MT58	(11) #6x14'-0" @ 12"	HOOK AT END
MT60	(16) #7x10'-10" @ 8"	HOOK AT END
MT61	(11) #5x14'-2" @ 12"	HOOK AT END
MT62	(11) #4x11'-4" @ 12"	HOOK AT END
MT63	(11) #4x14'-4" @ 12"	HOOK AT END
MT64	(11) #4x19'-4" @ 12"	HOOK AT END

MILD TOP REINFORCEMENT SCHEDULE		
MARK	REINFORCING	REMARKS
MT65	(11) #4x6'-10" @ 12"	HOOK AT END
MT66	(16) #7x18'-10" @ 8"	HOOK AT END
MT80	#5 @ 12"	HOOK BOTH ENDS
MT81	#5x14'-2" @ 12"	HOOK AT END
MT82	#6x29'-0" @ 12"	HOOK AT END
MT83	#5x19'-2" @ 12"	HOOK AT END
MT84	#5x6'-8" @ 12"	HOOK AT END
MT85	#5x9'-2" @ 12"	HOOK AT END
MT86	#5x11'-2" @ 12"	HOOK AT END
MT87	#6x11'-0" @ 12"	HOOK AT END
MT88	#4x14'-4" @ 12"	HOOK AT END
MT89	#4x6'-10" @ 12"	HOOK AT END
MT90	#4 @ 12"	HOOK BOTH ENDS
MT91	#4x9'-4" @ 12"	HOOK AT END
MT92	#6x14'-0" @ 12"	HOOK AT END
MT93	#5x19'-2" @ 10"	HOOK AT END
MT97	#7x10'-10" @ 12"	HOOK AT END

MILD BOTTOM REINFORCEMENT SCHEDULE		
MARK	REINFORCING	REMARKS
MB1	#5x20'-0" @ 12"	STAGGER 2'-0"
MB2	#5x12'-0" @ 24"	STAGGER 2'-0"
MB4	(3) #5x12'-0" @ 14"	STAGGER 2'-0"
MB5	#5x20'-0" @ 18"	STAGGER 2'-0"
MB6	#5x20'-0" @ 16"	STAGGER 2'-0"
MB7	(6) #5x15'-0" @ 16"	STAGGER 2'-0"
MB8	(11) #5x20'-0" @ 12"	STAGGER 3'-0"
MB9	(3) #5x15'-0" @ 24"	STAGGER 2'-0"
MB15	(6) #5x30'-0" @ 24"	STAGGER 3'-0"
MB16	(11) #4x12'-0" @ 12"	STAGGER 3'-0"
MB17	#6x5'-2" @ 24"	HOOK AT END



Reserved for permit stamp

189 South Jackson St., Suite 200  
Seattle, Washington 98104 USA  
+1 206 804 5970 olsonkundig.com

Olson Kundig

project:  
SOMMET BLANC - ABC  
DEER VALLEY, UTAH

MAGNUSSON  
KLEMENCIC  
ASSOCIATES  
Structural + Civil Engineers  
Seattle Chicago  
www.mka.com  
206 292 1200

principal architect \_\_\_\_\_  
project manager \_\_\_\_\_  
drawn by \_\_\_\_\_  
Author  
checked by \_\_\_\_\_  
Checker  
job no. 20052  
date 11/18/2022  
revisions:

1 11/18/2022 IFC  
no. date by

CONSTRUCTION  
DOCUMENTS

11/18/2022

AB CONNECTOR  
LEVEL 1  
REINFORCING  
PLAN

S2.AB.11.R






7. REFERENCE ALL CONSTRUCTION DOCUMENTS FOR SIZE, EXTENT, AND LOCATION OF CONCRETE CURBS, HOUSEKEEPING PADS, CMU WALLS, PLANTER WALLS, BOLLARDS, EDGE ANGLES, AND SLAB PENETRATIONS. REINFORCE PER TYPICAL DETAILS.







159 South Jackson St, Suite 600  
Seattle, Washington 98104 USA  
+1 206 624 5670 [olsonkundig.com](mailto:olsonkundig.com)

**SOMMET BLANC - ABC**  
DEER VALLEY, UTAH

visions:

11/18/2022	IFC
date	by

1/18/2022

**S2.AB.13**



S0.XX	DRAWING INDEX, ABBREVIATIONS, LEGENDS, GENERAL NOTES
S1.XX	LOAD DIAGRAMS
S2.XX	PLANS
S3.XX	ELEVATIONS
S4.XX	TYPICAL DETAILS AND SCHEDULES
S5.XX	CONCRETE SECTIONS AND DETAILS
S6.XX	STEEL SECTIONS AND DETAILS

1. REFER TO CORRESPONDING ROOF FRAMING PLAN FOR ADDITIONAL SHEET NOTES.
2. FRAMING PLAN INDICATES HSS FRAMING THAT IS EMBEDDED WITHIN THE SLAB ON STEEL DECK THICKNESS.
3. BOTTOM OF STEEL IS AT THE BOTTOM OF SLAB ON STEEL DECK.